

Lamp measurement report – 21 Aug 2010

Led Candle Light
by
CDE Technology



Photo courtesy by www.OliNo.org

Lamp measurement report – 21 Aug 2010

Summary measurement data

parameter	meas. result	remark
Color temperature	3035 K	Warm white
Luminous intensity I_v	7.2 Cd	Measured straight underneath the lamp.
Illuminance modulation index	2 %	Measured straight underneath the lamp. Is a measure for the amount of flickering.
Beam angle	303 deg	303° for all C-planes since the lamp is symmetrical along its 1st axis.
Power P	4.2 W	
Power Factor	0.55	For every 1 kWh net power consumed, there has been 1.5 kVAhr for reactive power.
THD	138 %	Total Harmonic Distortion
Luminous flux	129 Lm	
Luminous efficacy	31 Lm/W	
CRI_Ra	84	Color Rendering Index.
Coordinates chromaticity diagram	x=0.4404 and y=0.4155	
Fitting	E27	This lamp is connected to the 230 V grid voltage.
PAR-value	0.1 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.
PAR-photon efficacy	0.3 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.2	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).

Lamp measurement report – 21 Aug 2010

D x H external dimensions	41 x 125 mm	External dimensions of the lamp.
D x H luminous area	37 x 57 mm	Dimensions of the luminous area (used in Eulumdat file). This is the surface of the matte candle-glass.
General remarks		<p>The ambient temperature during the whole set of measurements was 26-26.5 deg C. The temperature of the housing with coolribs gets about 40 degrees hotter than ambient temperature.</p> <p>Warm up effect: during the warm up time the illuminance decreases with 16 %.</p> <p>Voltage dependency: the power consumption and illuminance vary little, and in a linear way, when the power voltage varies between 200-250 V.</p>



Lamp measurement report – 21 Aug 2010

Overview table

m.	Ø 50%		C0-180: 303° C90-270: 303°	E (lux)	Luminaire Efficacy
	C0-180	C90-270			31 (lumens per Watt)
0.25	-0.27	-0.27		116	Half-peak diam C0-180
0.5	-0.55	-0.55		29	-1.09 x diameter(m)
1	-1.09	-1.09		7	Half-peak diam C90-270
1.5	-1.64	-1.64		3	-1.09 x diameter(m)
3	-3.28	-3.28		1	Illuminance
4	-4.37	-4.37		0	7 / distance ² (lux)
5	-5.47	-5.47		0	Total Output
					129 (lumens)

The overview table is explained on the OLiNo website.


Please note that this overview table makes use of calculations, use this data with care as explained on the OLiNo site. E (lux) values are not accurate, when within 5 x 57 mm ≈ 300 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.

Note II: the beamangle > 180 degrees and hence the half peak diameters and the Ø50% spot size are not defined. Discard the negative values.

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. It is explained on the OLiNo site.

Lamp measurement report – 21 Aug 2010

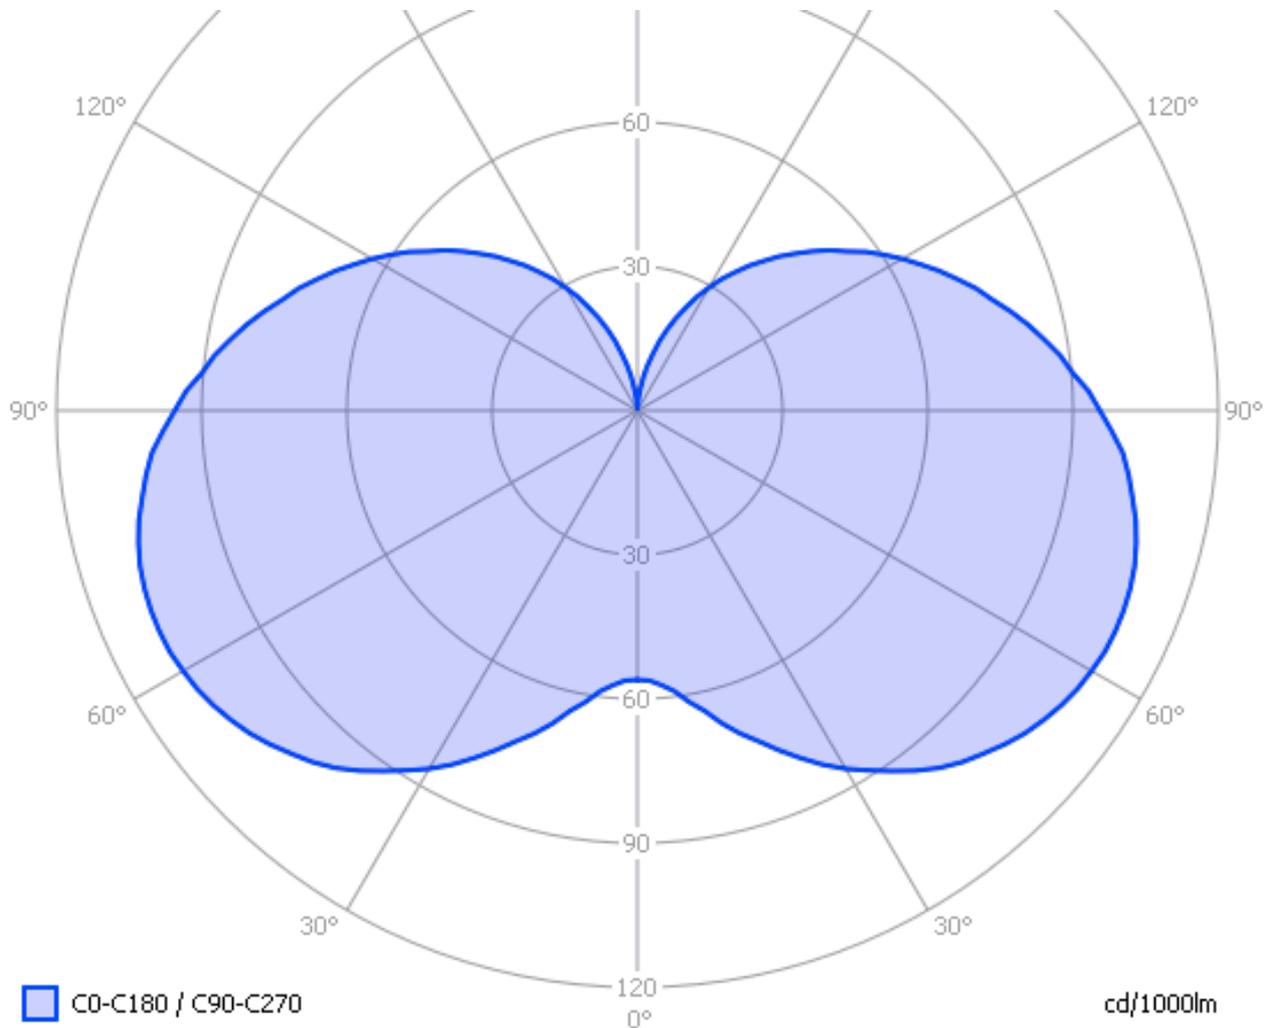


The light diagram giving the radiation pattern.

It indicates the luminous intensity around the light bulb. All the planes give the same results as the lamp is symmetrical along its 1st axis.

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.


Lamp measurement report – 21 Aug 2010

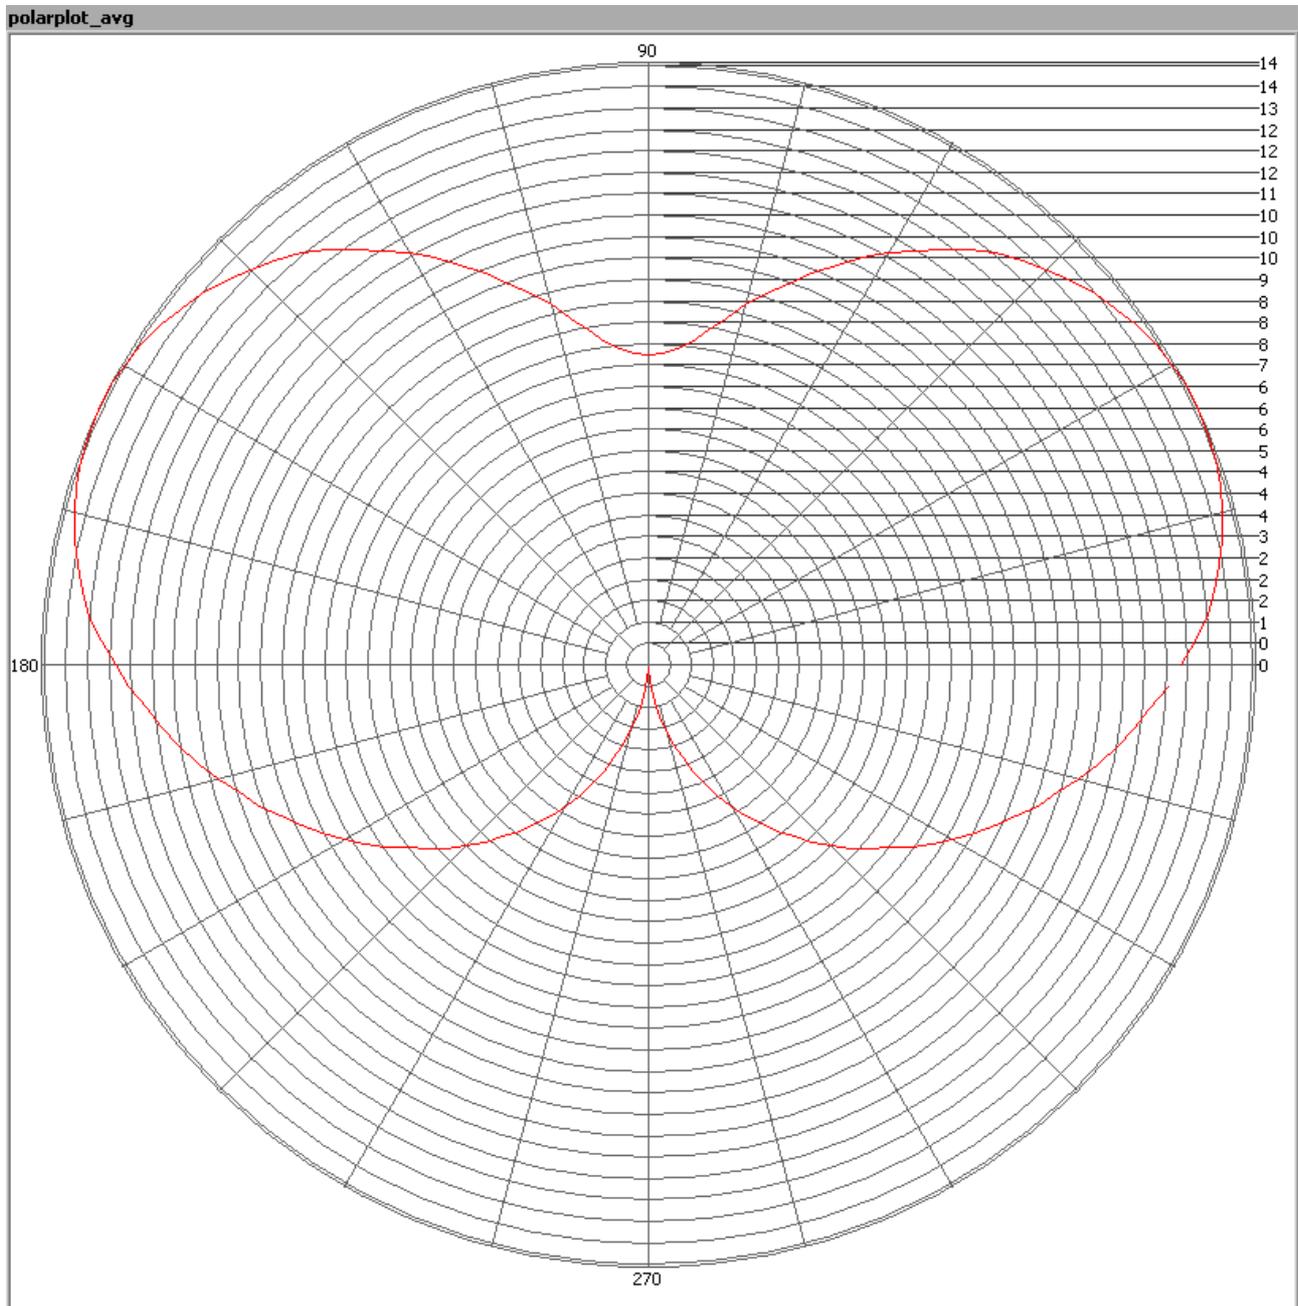

The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd. These averaged values are used (later) to compute the lumen output.

Lamp measurement report – 21 Aug 2010

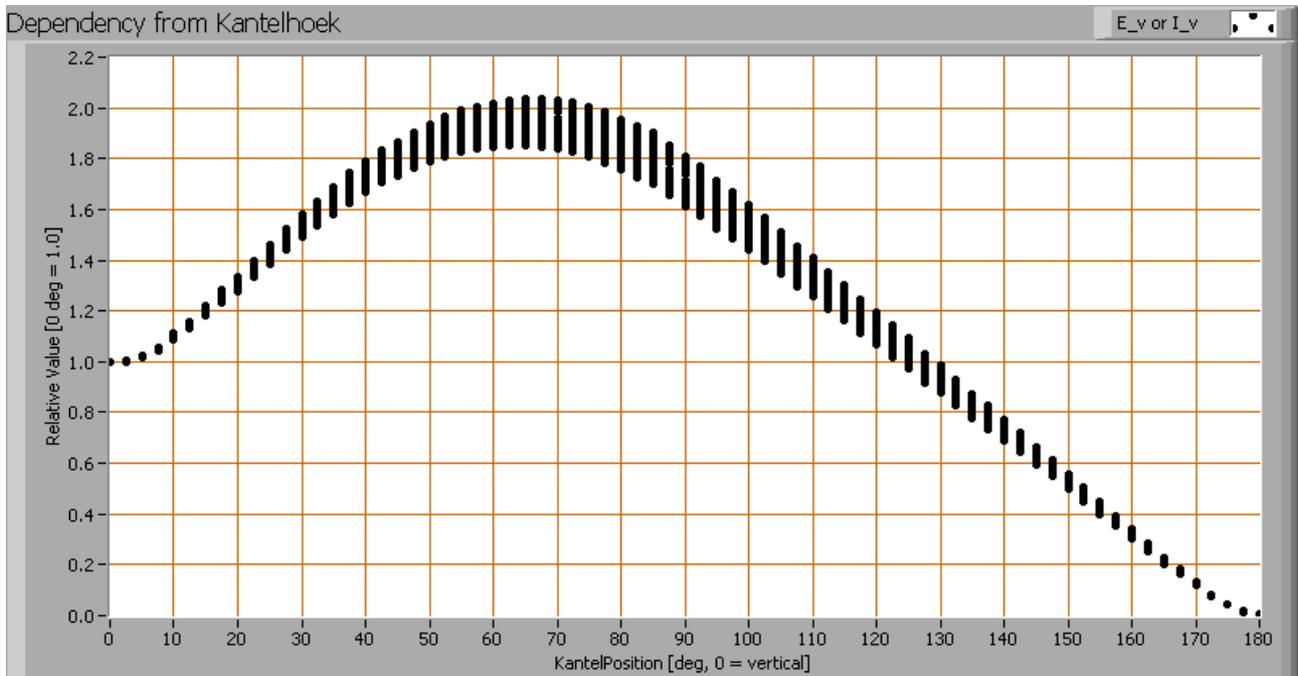

Intensity data of every measured turn angle at each inclination angle.

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 303° for all C-planes looked at.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 129 Lm.

Luminous efficacy

The luminous flux being 129 Lm, and the power of the light bulb being 4.2 W, yields a luminous efficacy of 31 Lm/W.




Lamp measurement report – 21 Aug 2010

Electrical properties

A power factor of 0.55 means that for every 1 kWh net power consumed, a reactive component of 1.5 kVAR was needed.

Lamp voltage	230 VAC
Lamp current	33 mA
Power P	4.2 W
Apparent power S	7.6 VA
Power factor	0.55


Of this light bulb the voltage across and the resulting current through it are measured and graphed. See the OliNo site how this is obtained.

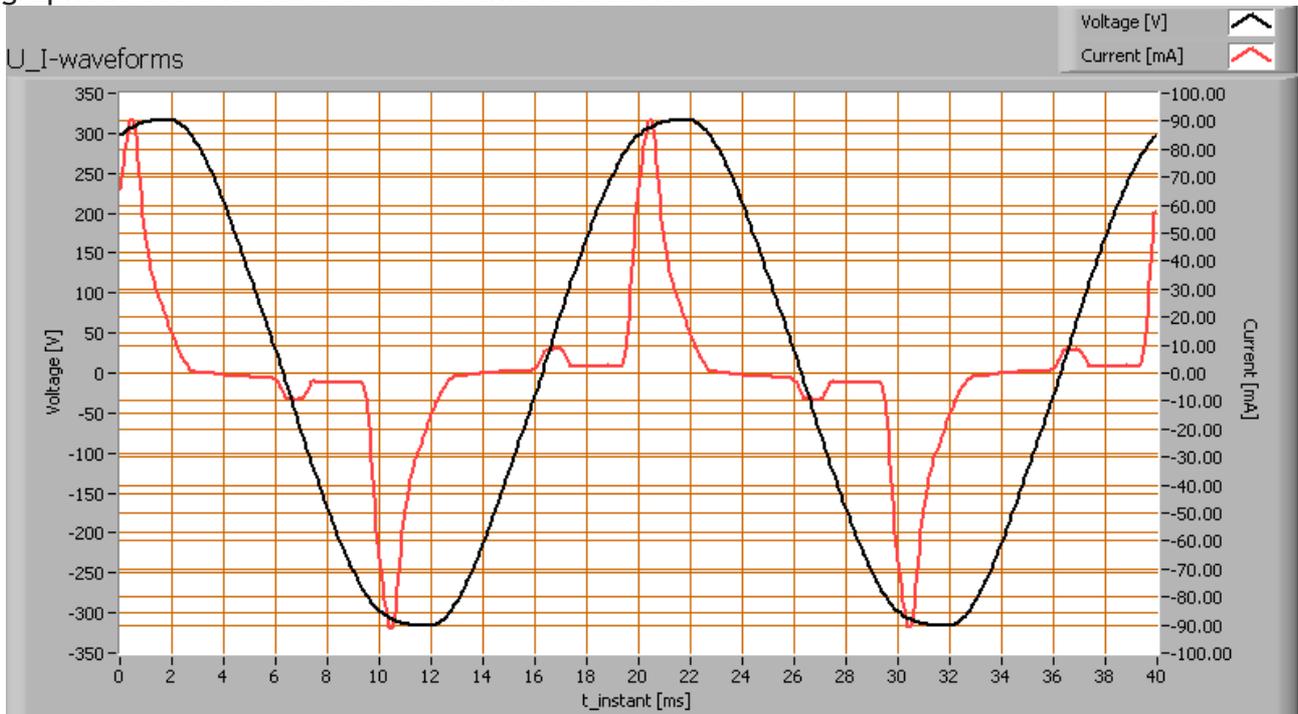

Voltage across and current through the lightbulb

This waveforms have been checked on requirements posed by the norm IEC 61000-3-2:2006 (including up to A2:2009). See also the explanation on the OliNo website.

Lamp measurement report – 21 Aug 2010

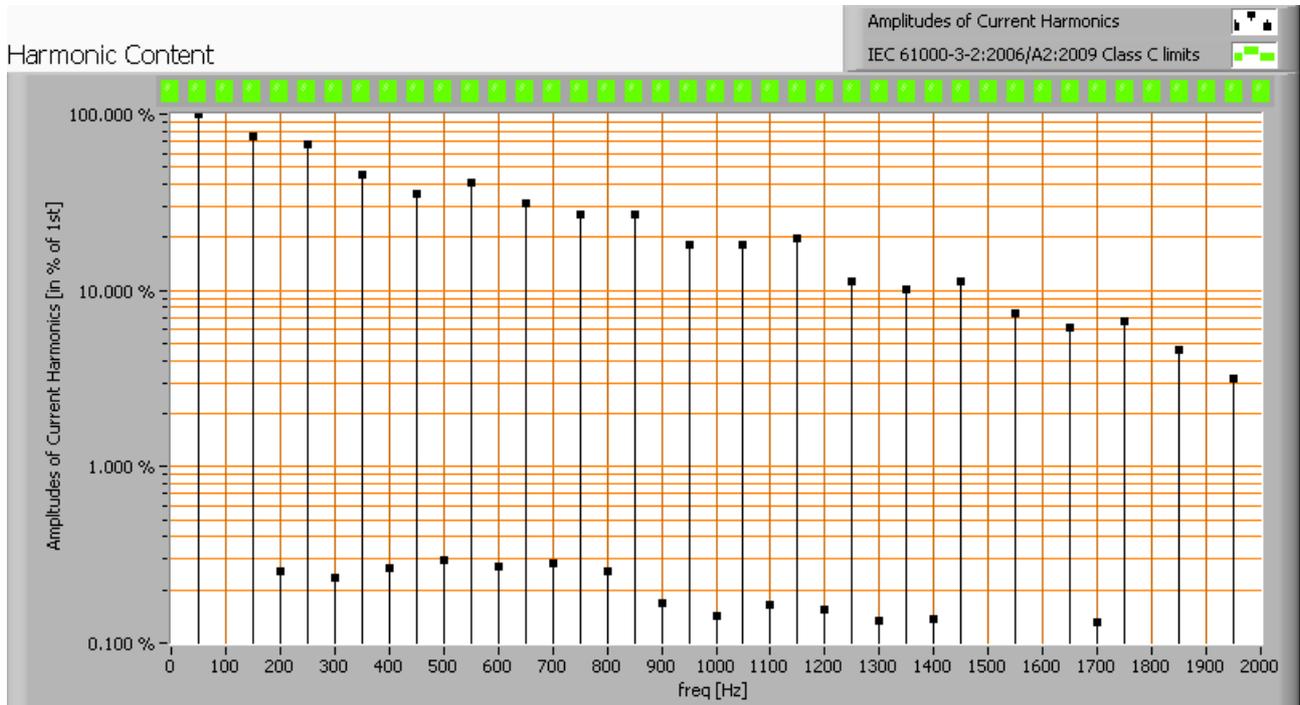


Harmonics in in the current waveform and checked against IEC61000-3-2:2006

There are no limits for the harmonics for lighting equipment ≤ 25 W.

The Total Harmonic Distortion of the current is computed as 138 %.


Lamp measurement report – 21 Aug 2010

Temperature measurements lamp

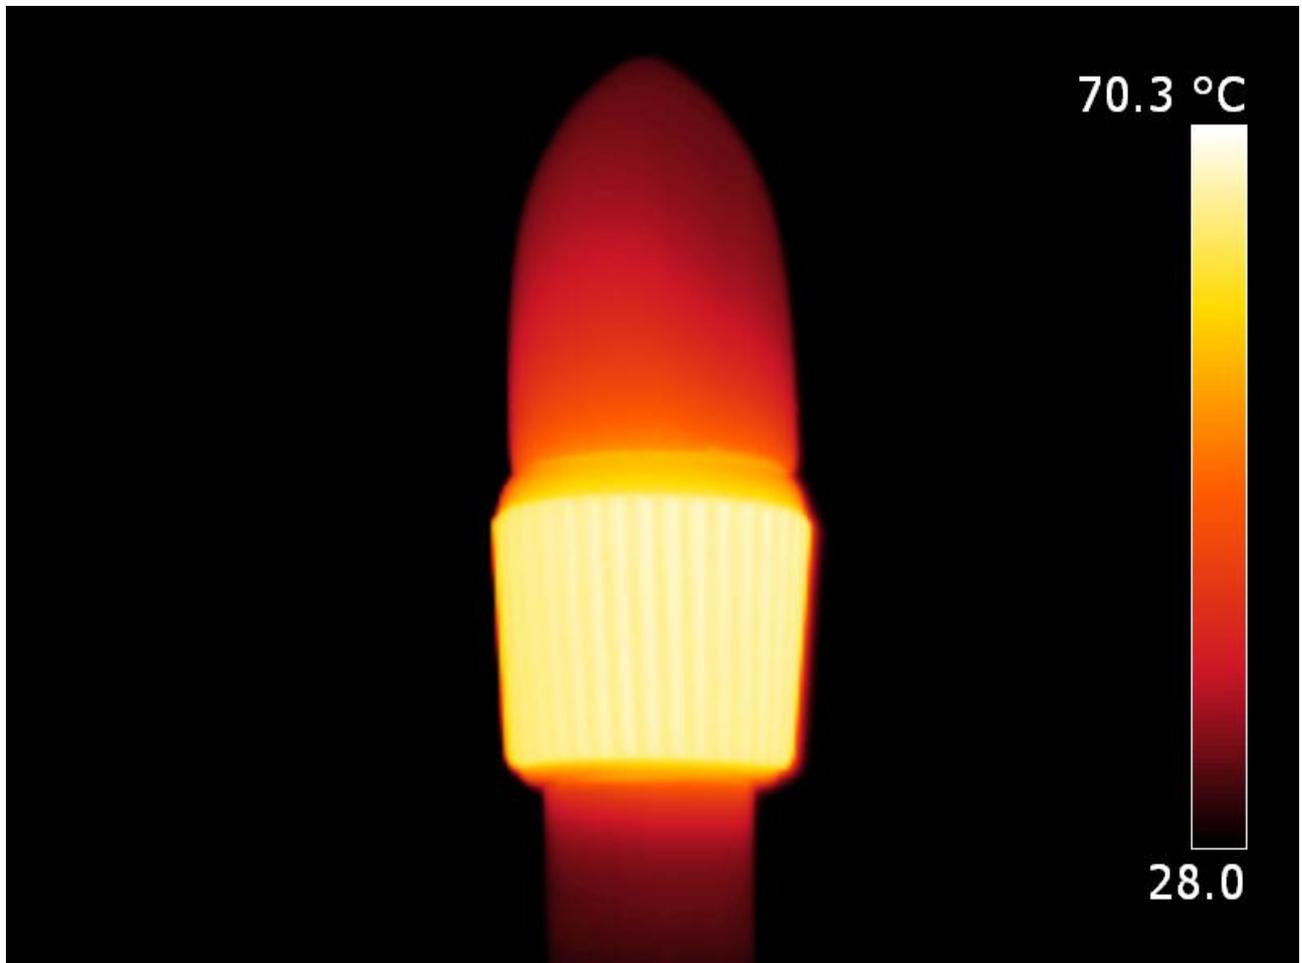

Overview image

Lamp measurement report – 21 Aug 2010

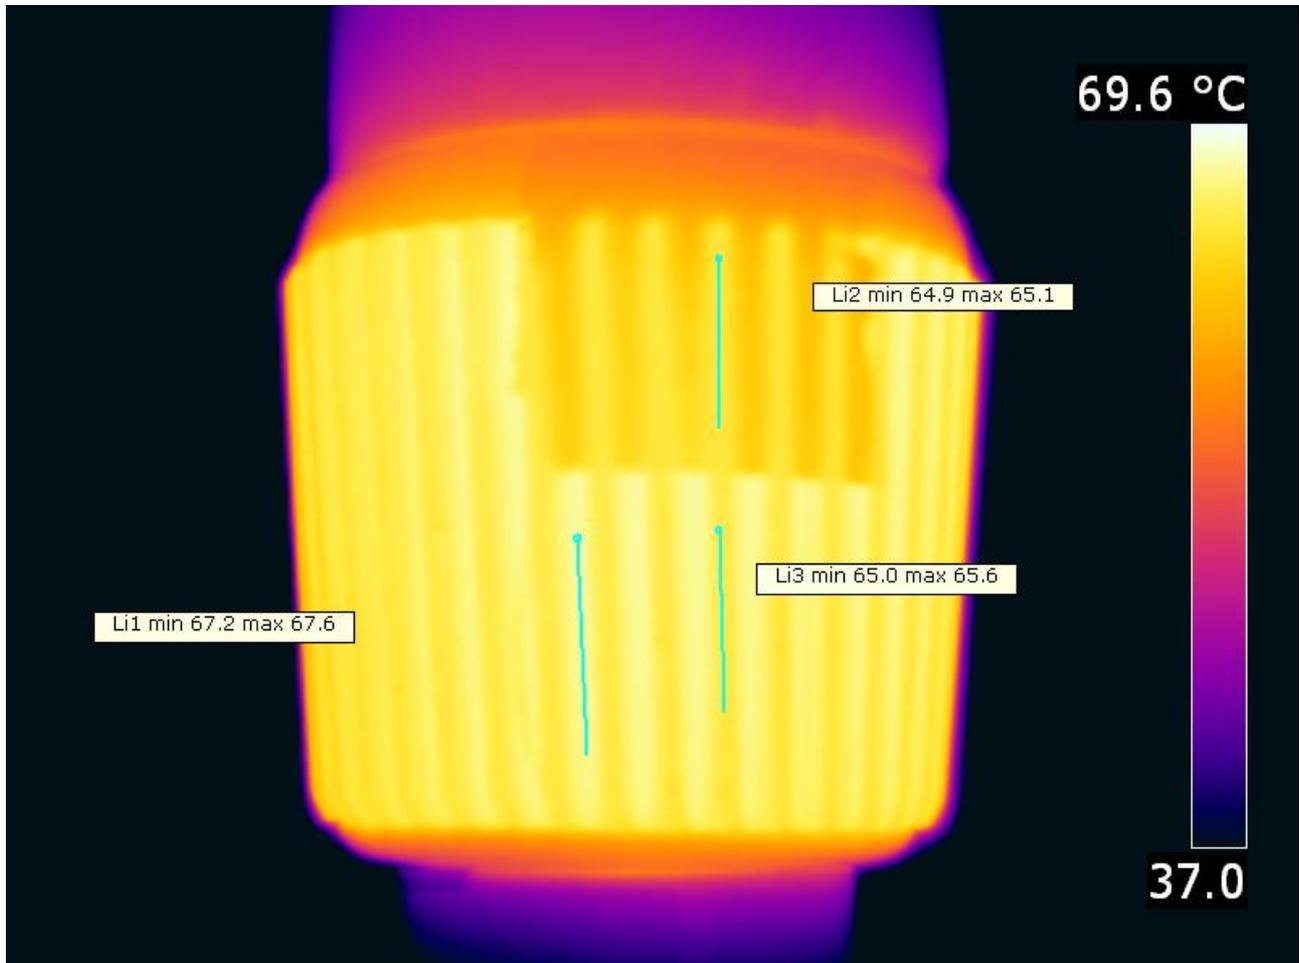

Determination of the correct emissivity. It seems to be equal to that of the tape.

The used tape has an emissivity of about 0.95.


The maximum temperature is found between the ribs.

status lamp	> 2 hours on
ambient temperature	26 deg C
reflected background temperature	26 deg C
camera	Flir T335
emissivity	0.95 ⁽¹⁾
measurement distance	0.2 m
IFOV _{geometric}	0.3 mm
NETD (thermal sensitivity)	50 mK

⁽¹⁾ The emissivity is set equal to the masking tape that is being used.

Lamp measurement report – 21 Aug 2010

Color temperature and Spectral power distribution

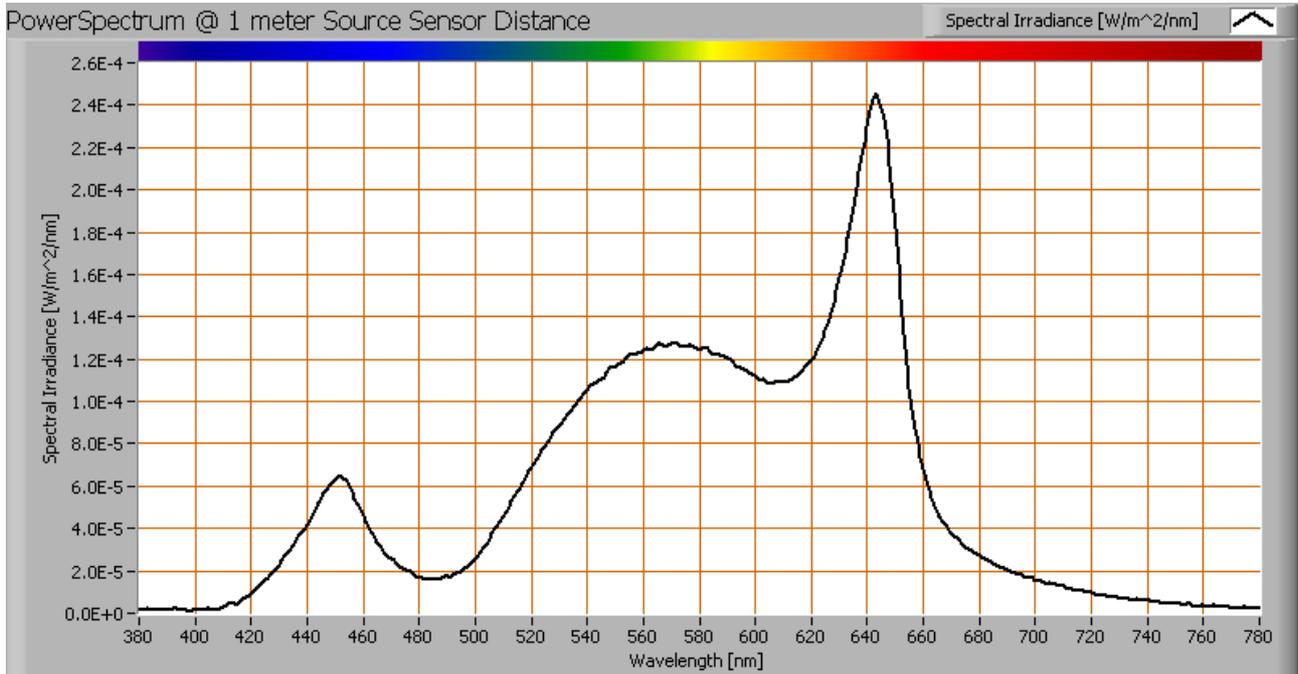


The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.

The measured color temperature is about 3050 K which is warm white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

Lamp measurement report – 21 Aug 2010

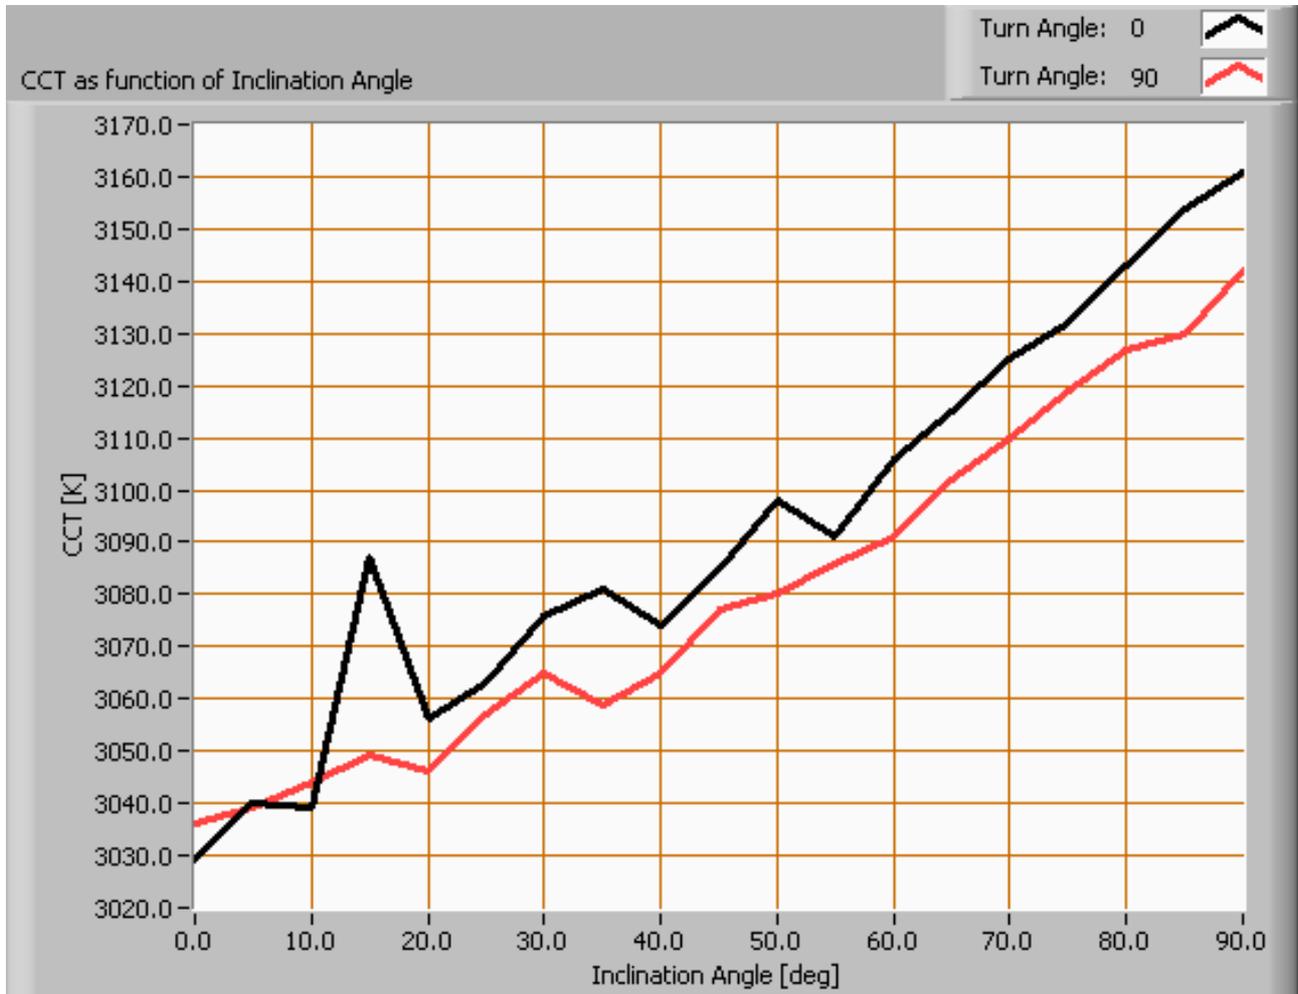

Color temperature as a function of inclination angle.


The measurement of CCT is measured for inclination angles up to 90°.

The beam angle is 303°, meaning a 151.5° inclination angle. In this area most of the light is present. The variation in correlated color temperature in the area up to 90 degrees inclination angle is about 5 %.

Lamp measurement report – 21 Aug 2010

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the OLiNo website how this all is determined and the explanation of the graph.

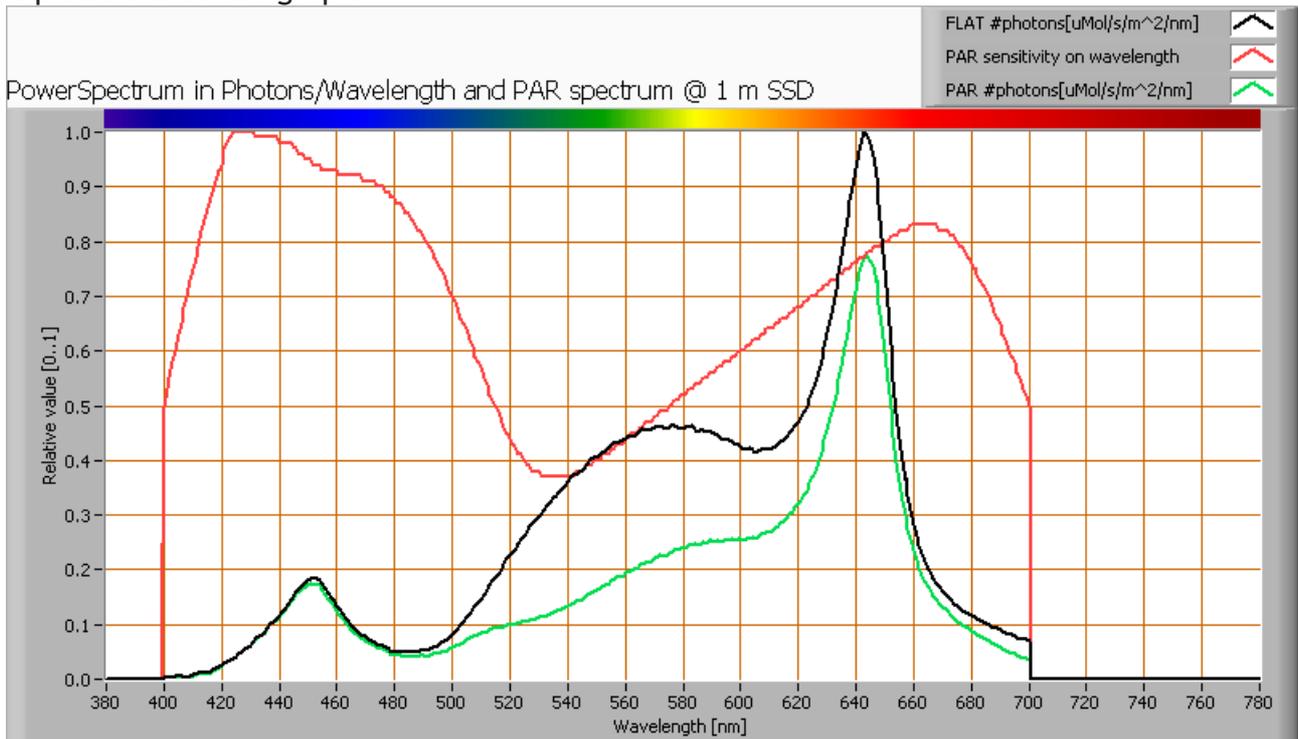

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb


parameter	value	unit
PAR-number	0.1	μMol/s/m ²
PAR-photon current	1.3	μMol/s
PAR-photon efficacy	0.3	μMol/s/W

The PAR efficiency is 64 % (valid for the PAR wave length range of 400 - 700 nm). So maximally 64 % of the total of photons in the light is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

Lamp measurement report – 21 Aug 2010

S/P ratio

The S/P ratio and measurement is explained on the OLiNo website. Here the results are given.

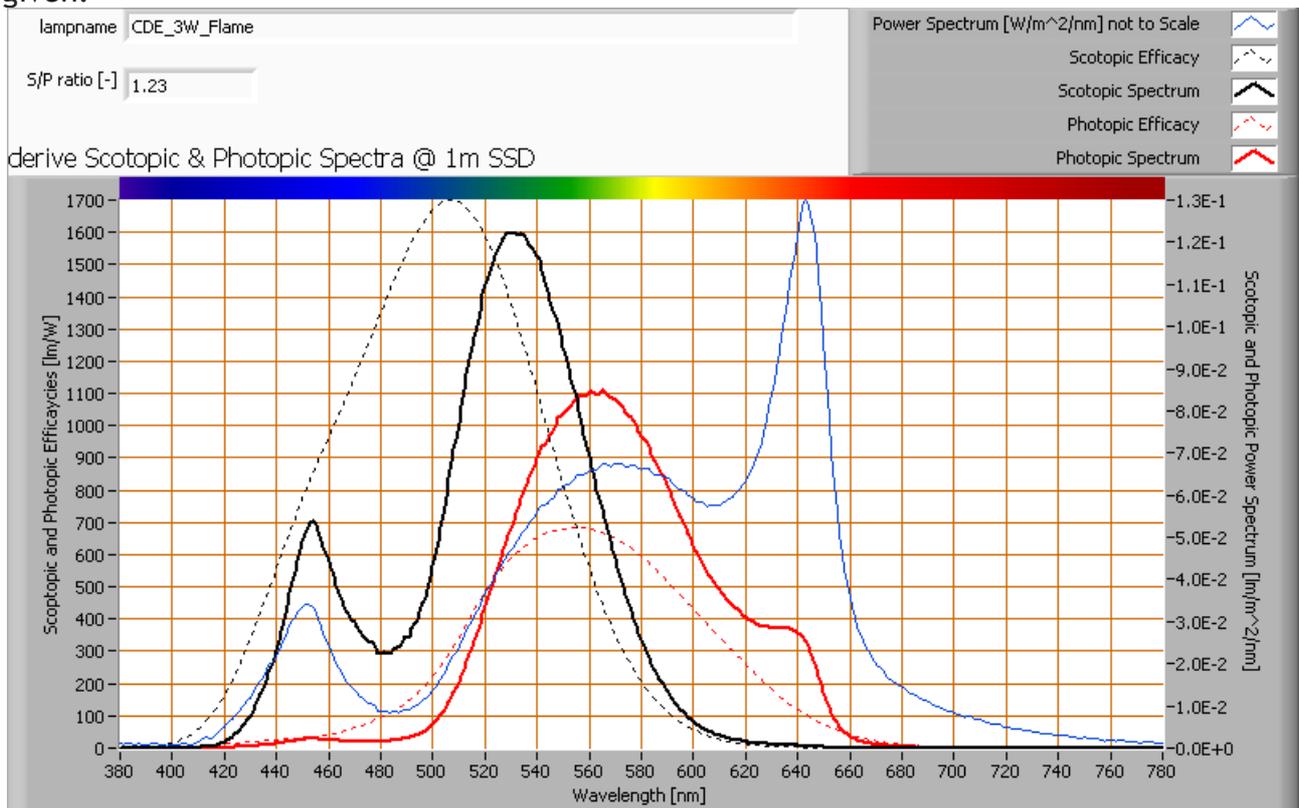


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio is 1.2.

More info on S/P ratio can be found on the OLiNo website.

Lamp measurement report – 21 Aug 2010

Chromaticity diagram

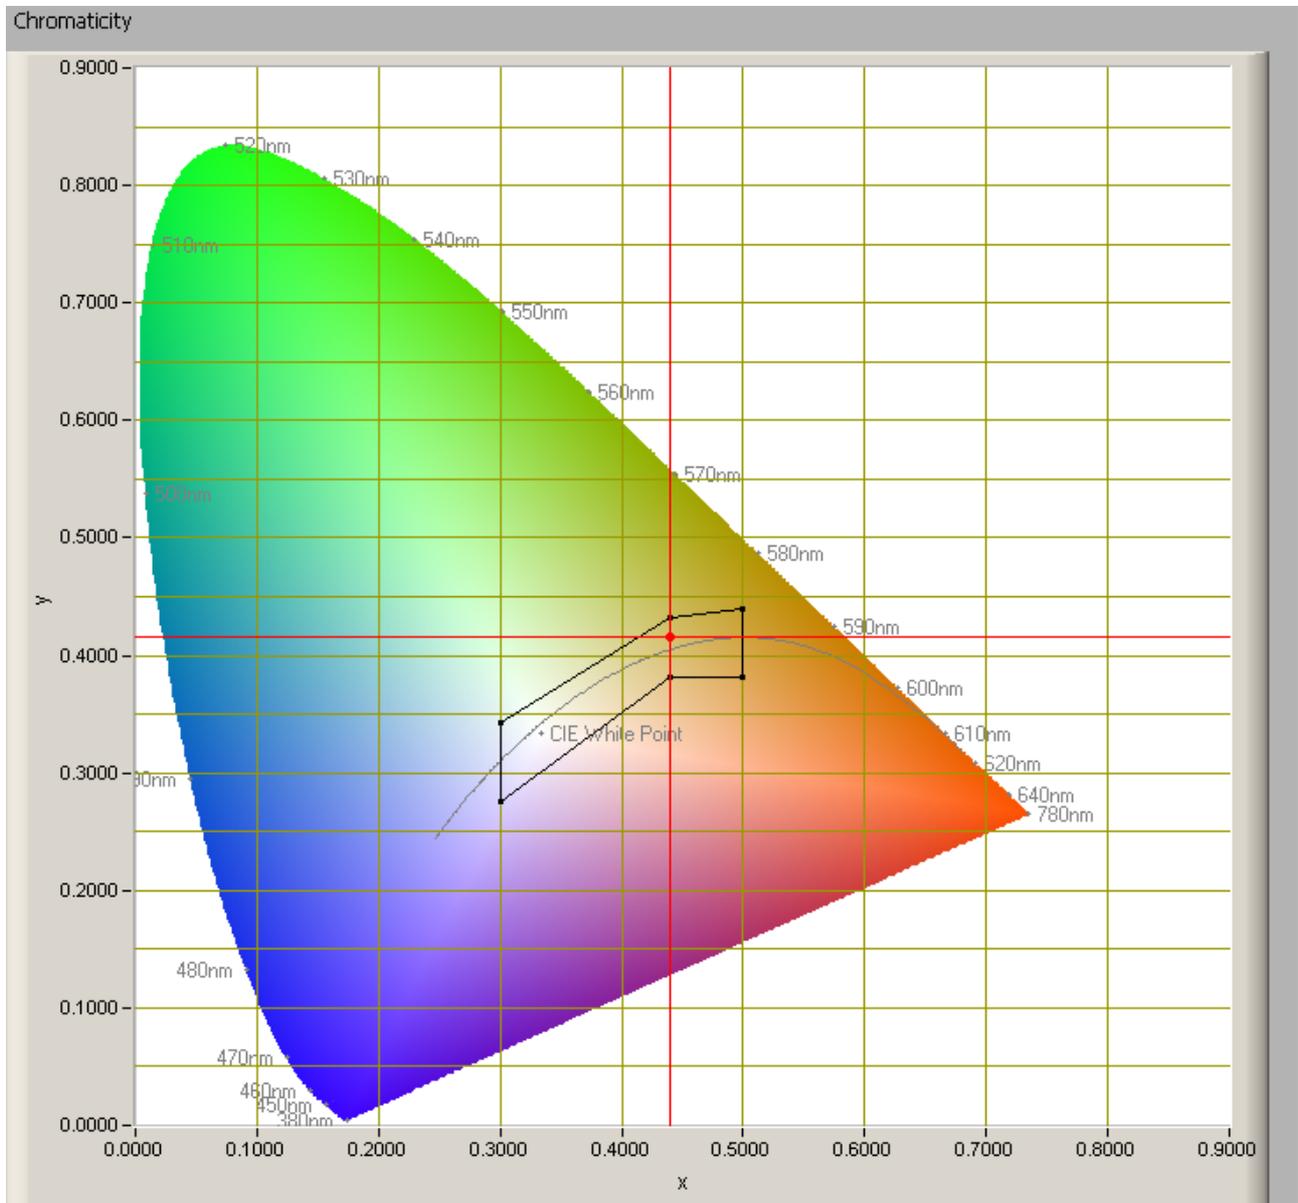

The chromaticity space and the position of the lamp's color coordinates in it.

The light coming from this lamp is on the border of areas of class A and B. These areas are defined for signal lamps, see also the OliNo website.


Its coordinates are $x=0.4404$ and $y=0.4155$.



Lamp measurement report – 21 Aug 2010

Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OliNo website. Each color has an index R_x , and the first 8 indexes ($R_1 \dots R_8$) are averaged to compute the R_a which is equivalent to the CRI.

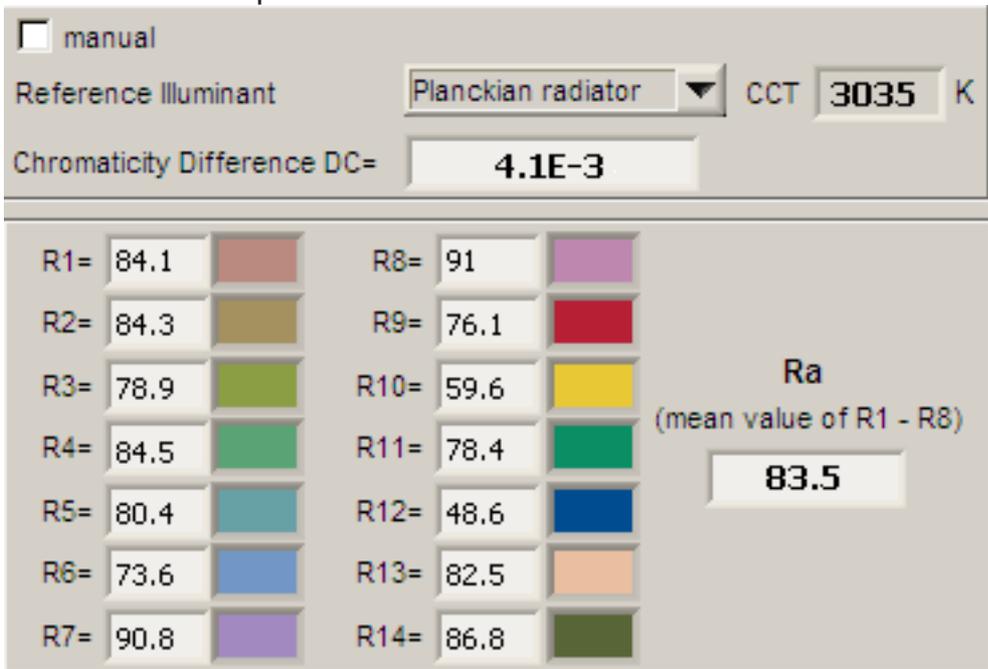

CRI of the light of this lightbulb.


The value of 84 is higher than 80 which is considered a minimum value for indoor usage. Note: the chromaticity difference is 0.0041 indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous

Lamp measurement report – 21 Aug 2010

efficacy [lm/W].

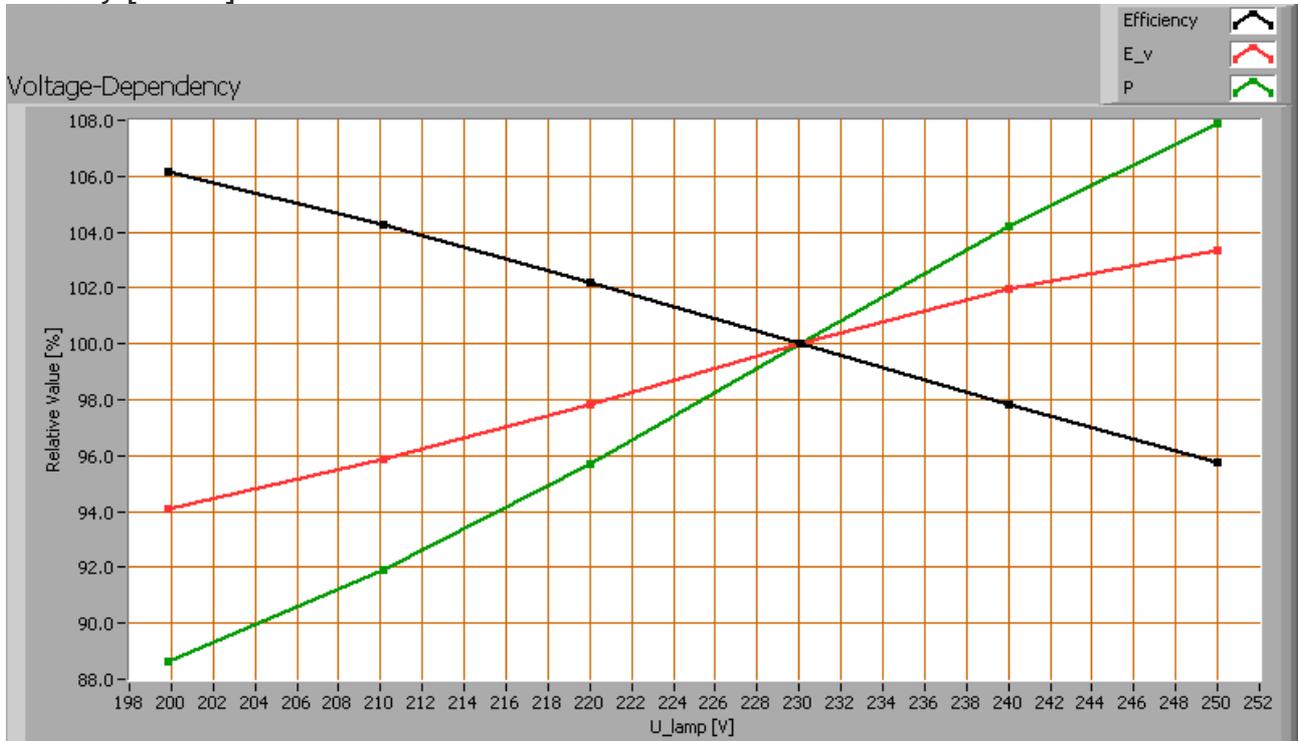


Lamp voltage dependencies of certain light bulb parameters, where the value at 230 V is taken as 100 %.

The illuminance and consumed power vary slightly when the voltage is varied. When the voltage at 230 V varies with + and - 5 V, then the illuminance varies < 2 %, so when abrupt voltage changes occur this effect is not visible in the illuminance output.

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

Lamp measurement report – 21 Aug 2010

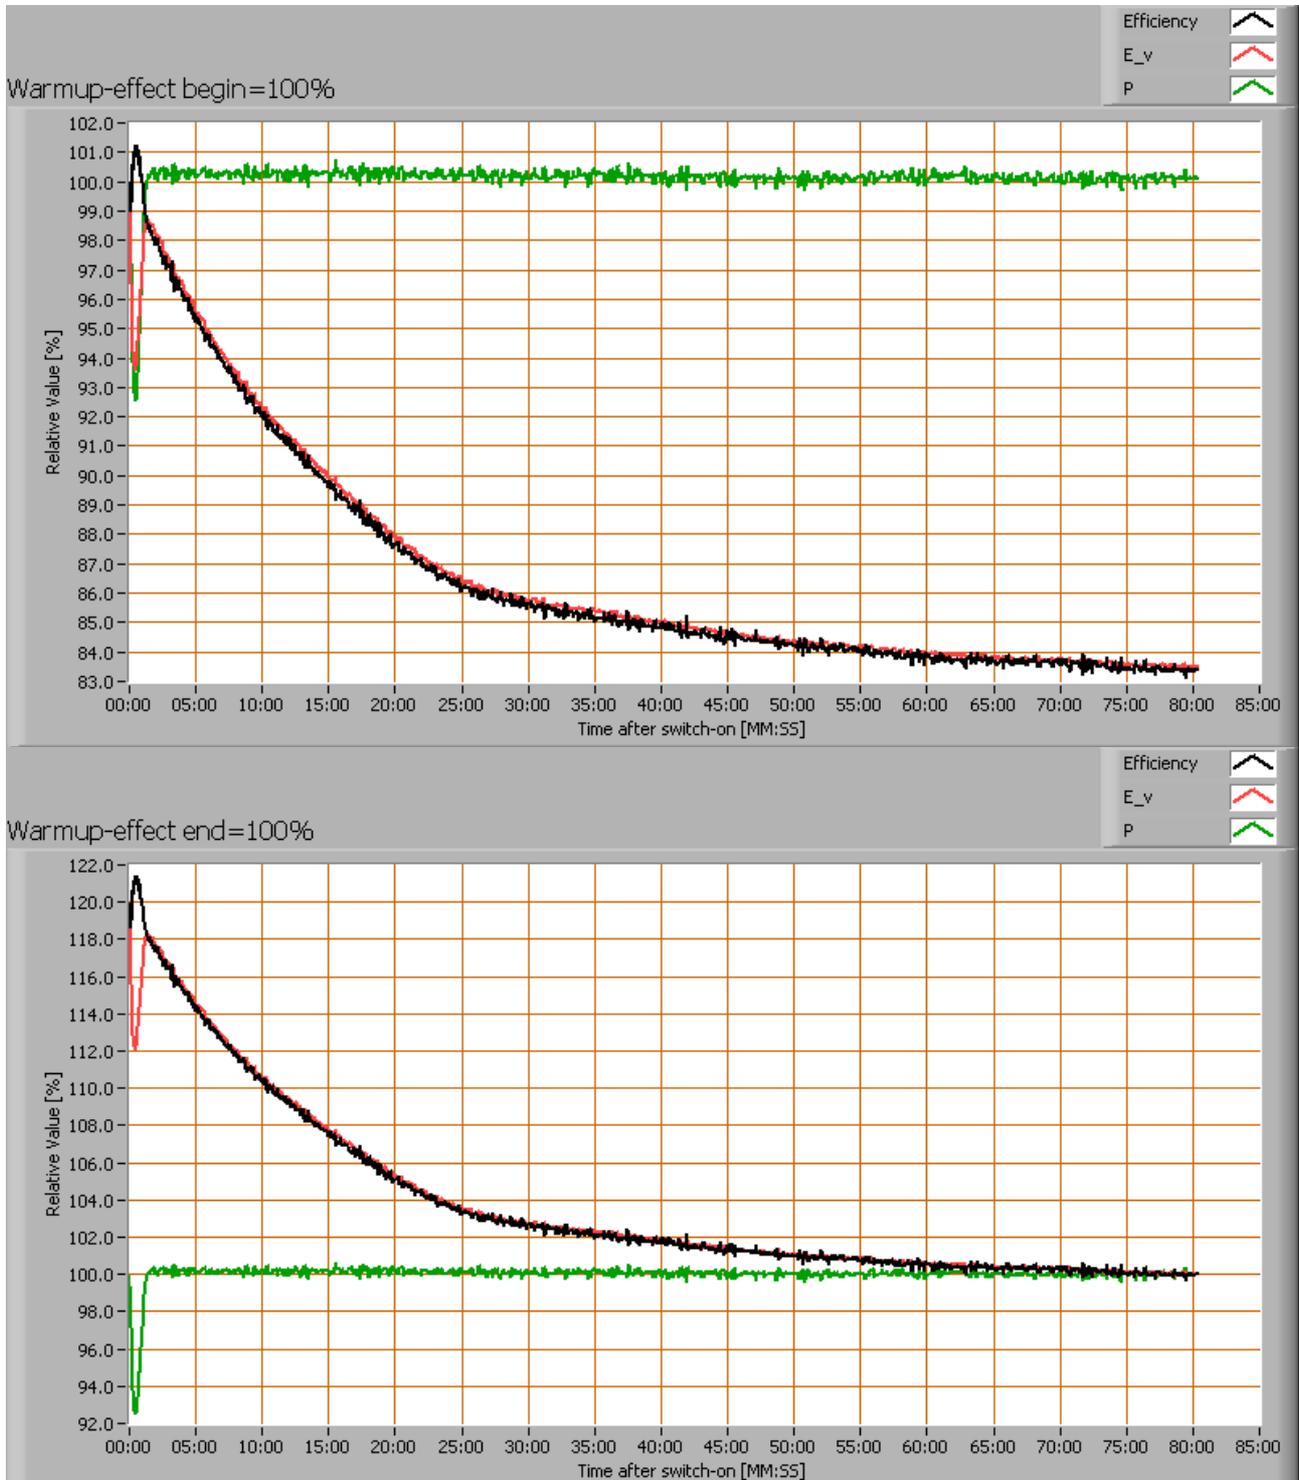

Effect of warming up on different light bulb parameters. At top the 100 % level is put at begin, and at bottom at the end.




Lamp measurement report – 21 Aug 2010

The warm up time is about 45 minutes during which the illuminance decreases with 16 %.

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the OliNo site for more information.

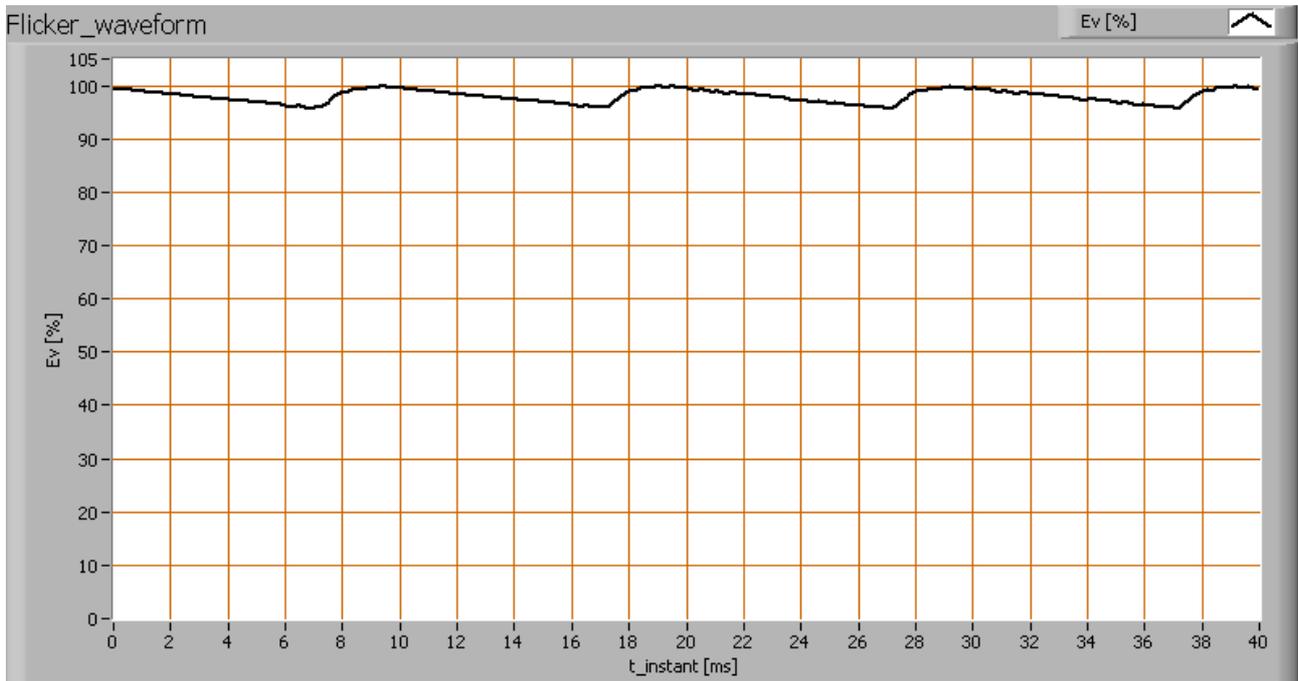

The measure of fast illuminance variation of the light of the light bulb

parameter	waarde	eenheid
Flicker frequency	100	Hz
Illuminance modulation index	2	%

The illuminance modulation index is computed as: $(\max_{Ev} - \min_{Ev}) / (\max_{Ev} + \min_{Ev})$.

Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this



Lamp measurement report – 21 Aug 2010

report be legally binding.

License

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly prohibited to change or alter parts of the report and/or republish it in a modified content.