



## **Lamp measurement report – 24 Oct 2010**

### **KLV-AOBAR-A test** by **KLV Ledverlichting**



## Lamp measurement report – 24 Oct 2010

### Summary measurement data


parameter	meas. result	remark
Color temperature	4710 K	Neutral white
Luminous intensity $I_v$	658 Cd	Measured straight underneath the lamp.
Illuminance modulation index	0 %	Measured straight underneath the lamp. Is a measure for the amount of flickering.
Beam angle	119 deg	119° for all the C0-C180-plane (perpendicular to the length direction of the lamp) and 103° for the C90-C270 plane, which is along the length direction of the lamp.
Power P	24.0 W	
Power Factor	n.a.	A DC power supply was used to test. This means that there is no blind power.
THD	n.a. %	Total Harmonic Distortion is not present due to the usage of a DC Voltage which results in a DC current.
Luminous flux	2066 Lm	
Luminous efficacy	86 Lm/W	
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI_Ra	67	Color Rendering Index.
Coordinates chromaticity diagram	x=0.3569 and y=0.3758	
Fitting	24V	This lamp is connected to a 24 V DC voltage
PAR-value	5.3 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.

## Lamp measurement report – 24 Oct 2010

PAR-photon efficacy	0.7 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.6	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
L x W x H external dimensions	1250 x 30 x 24 mm	External dimensions of the lamp.
L x W luminous area	1220 x 30 x 9 mm	Dimensions of the luminous area (used in Eulumdat file). This is the surface of the prismatic cover. The height is only visible in the C0-C180 plane.
General remarks		<p>The ambient temperature during the whole set of measurements was 23.6 - 24.9 deg C.</p> <p>The temperature of the housing gets about 18 degrees hotter than ambient temperature.</p> <p>Warm up effect: during the warm up time the illuminance decreases with 7 % and the consumed power does not vary significantly.</p> <p>Voltage dependency: the power consumption and illuminance vary insignificantly, when the power voltage varies between 200-250 V.</p>

## Lamp measurement report – 24 Oct 2010

### Overview table

m.	Ø 50%		CO-180: 119° C90-270: 103° 	E (lux)	Luminaire Efficacy
	CO-180	C90-270			86 (lumen per Watt)
0.25	0.86	0.63		10536	Half-peak diam CO-180
0.5	1.71	1.25		2634	3.43 x diameter(m)
1	3.43	2.5		658	Half-peak diam C90-270
1.5	5.14	3.76		293	2.5 x diameter(m)
3	10.28	7.51		73	Illuminance
4	13.71	10.02		41	658 / distance <sup>2</sup> (lux)
5	17.14	12.52		26	Total Output
					2066 (lumen)

The overview table is explained on the OliNo website.


Please note that this overview table makes use of calculations, use this data with care as explained on the OliNo site. E (lux) values are not accurate, when within 5 x 1220 mm ≈ 6100 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.

### EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OliNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain.

Herewith the labels for this lamp in color and black and white.

## Lamp measurement report – 24 Oct 2010

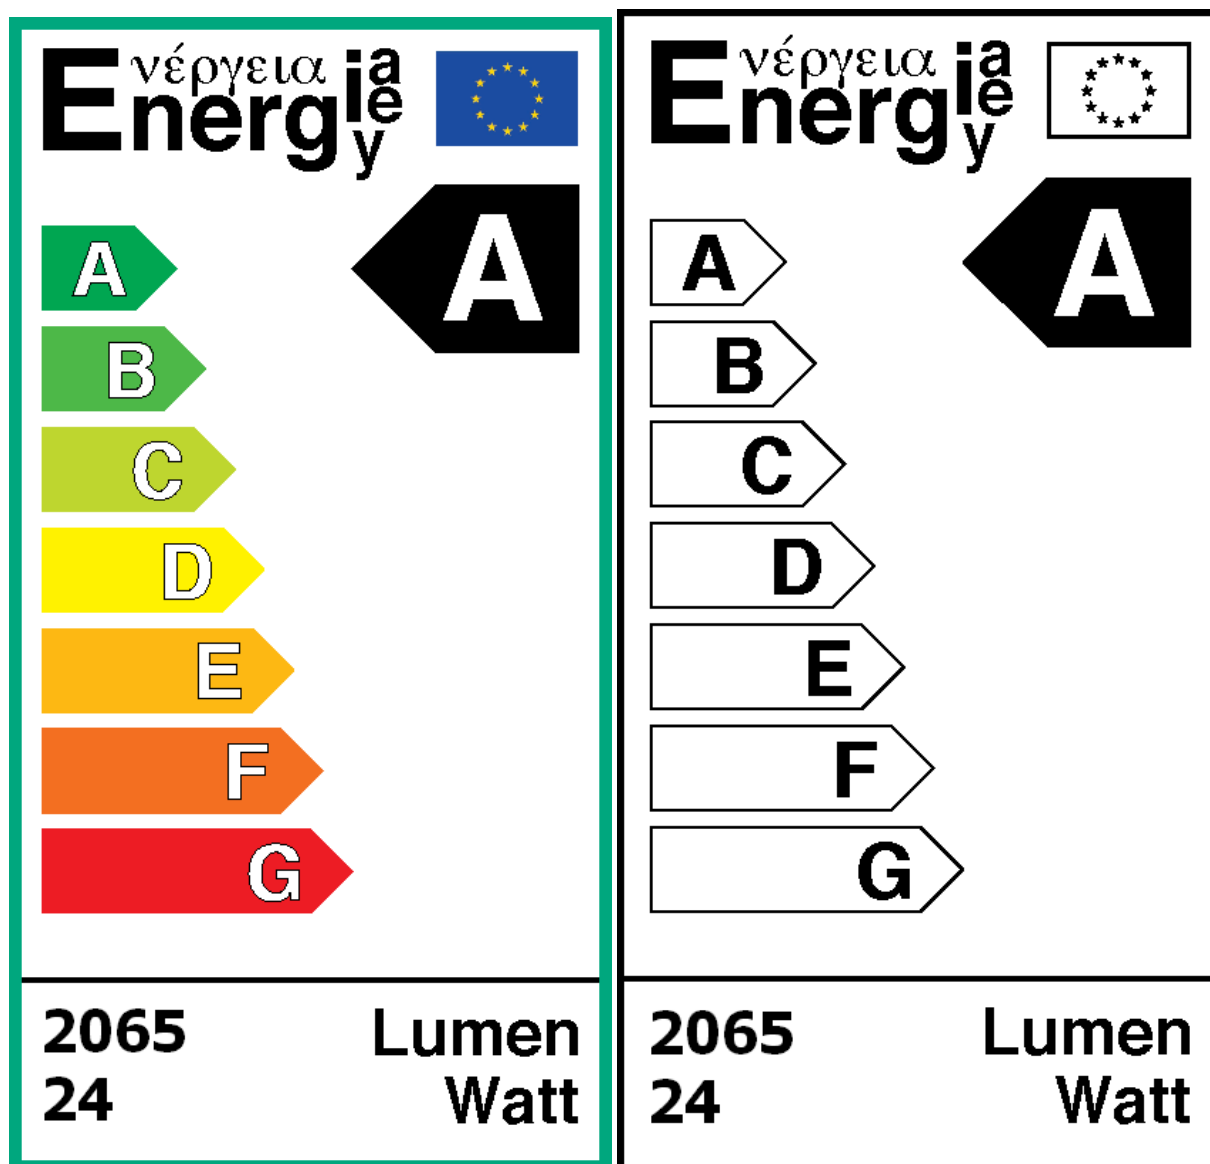


*EU energy label of this lamp*

### Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. It is explained on the OliNo site.

## Lamp measurement report – 24 Oct 2010

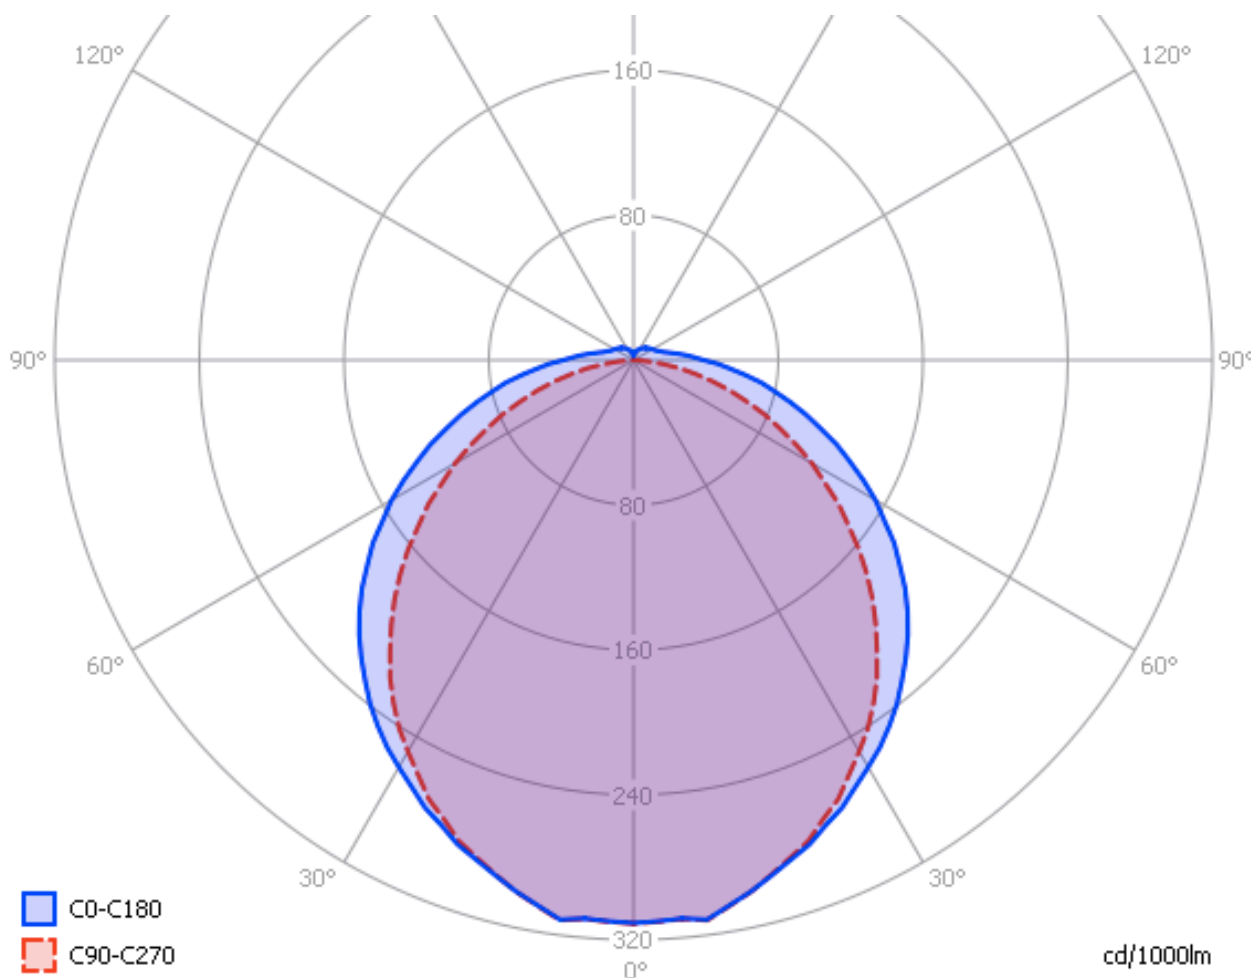


*The light diagram giving the radiation pattern.*

It indicates the luminous intensity around the light bulb. The C0-C180 plane is along the width direction of the lamp) and is somewhat wider than the C90-C270 plane (along the length direction of the lamp) since the tube ends block the light towards the length direction.

### Illuminance $E_v$ at 1 m distance, or luminous intensity $I_v$

Herewith the plot of the *averaged* luminous intensity  $I_v$  as a function of the inclination angle with the light bulb.

## Lamp measurement report – 24 Oct 2010

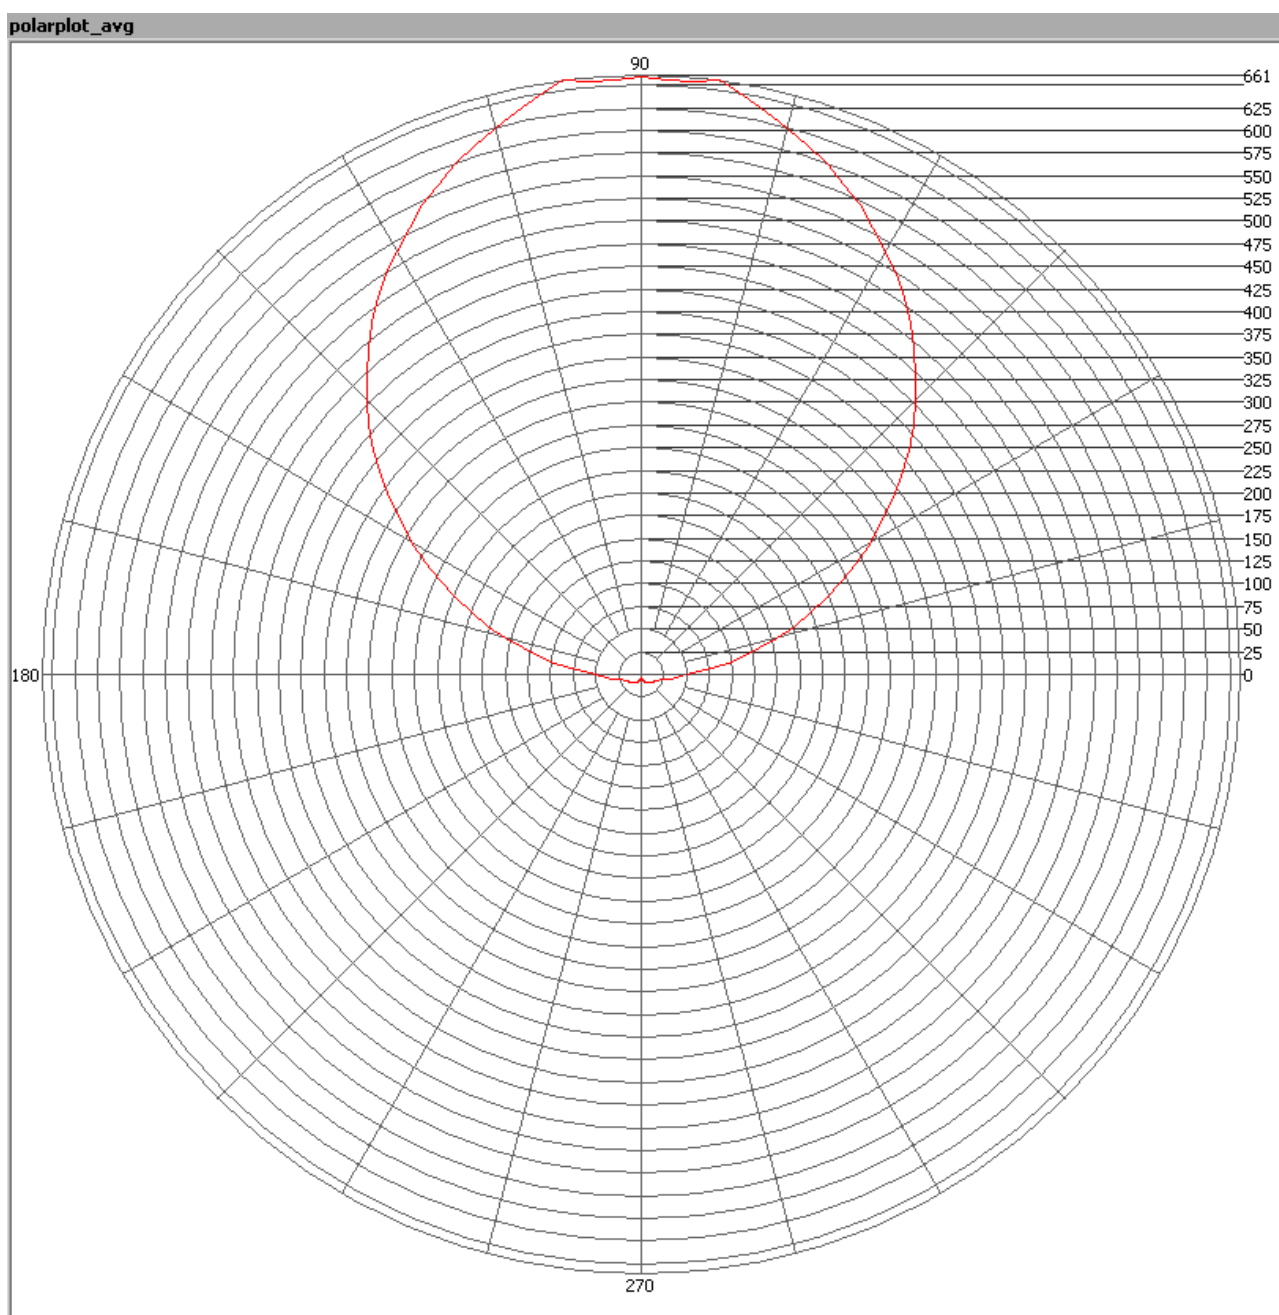


*The radiation pattern of the light bulb.*

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd. These averaged values are used (later) to compute the lumen output.



## Lamp measurement report – 24 Oct 2010

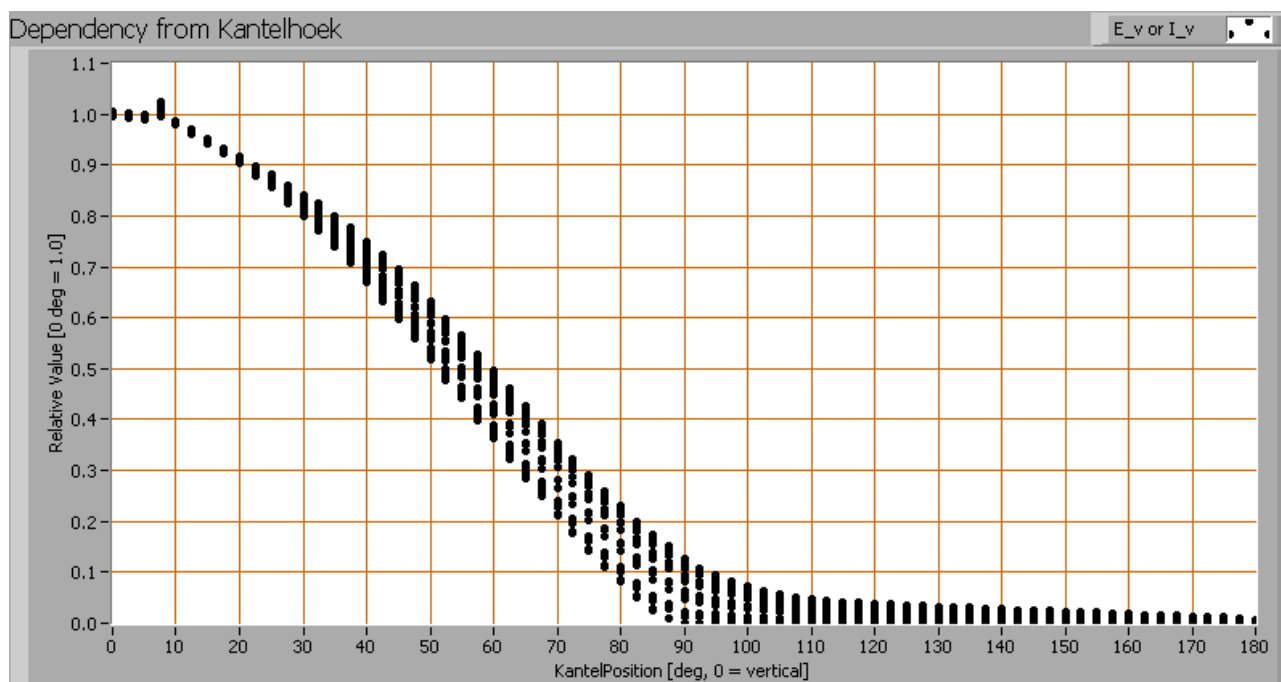

*Intensity data of every measured turn angle at each inclination angle.*

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 119° for the C0-C180 and 103° for the C90-C270 plane.

### Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 2066 Lm.

### Luminous efficacy

The luminous flux being 2066 Lm, and the power of the light bulb being 24.0 W, yields a luminous efficacy of 86 Lm/W.

The reported efficacy is for the ledmodules only, without an eventual power supply needed to transform 230 V AC into 24 V DC. Such a power supply would normally lead to



## Lamp measurement report – 24 Oct 2010


additional power consumption.

### Electrical properties

The lamp was used on DC power and therefore no blind currents.

Lamp voltage	24 V DC
Lamp current	1.00 A
Power P	24.0 W
Apparent power S	n.a. VA
Power factor	n.a.


### Temperature measurements lamp

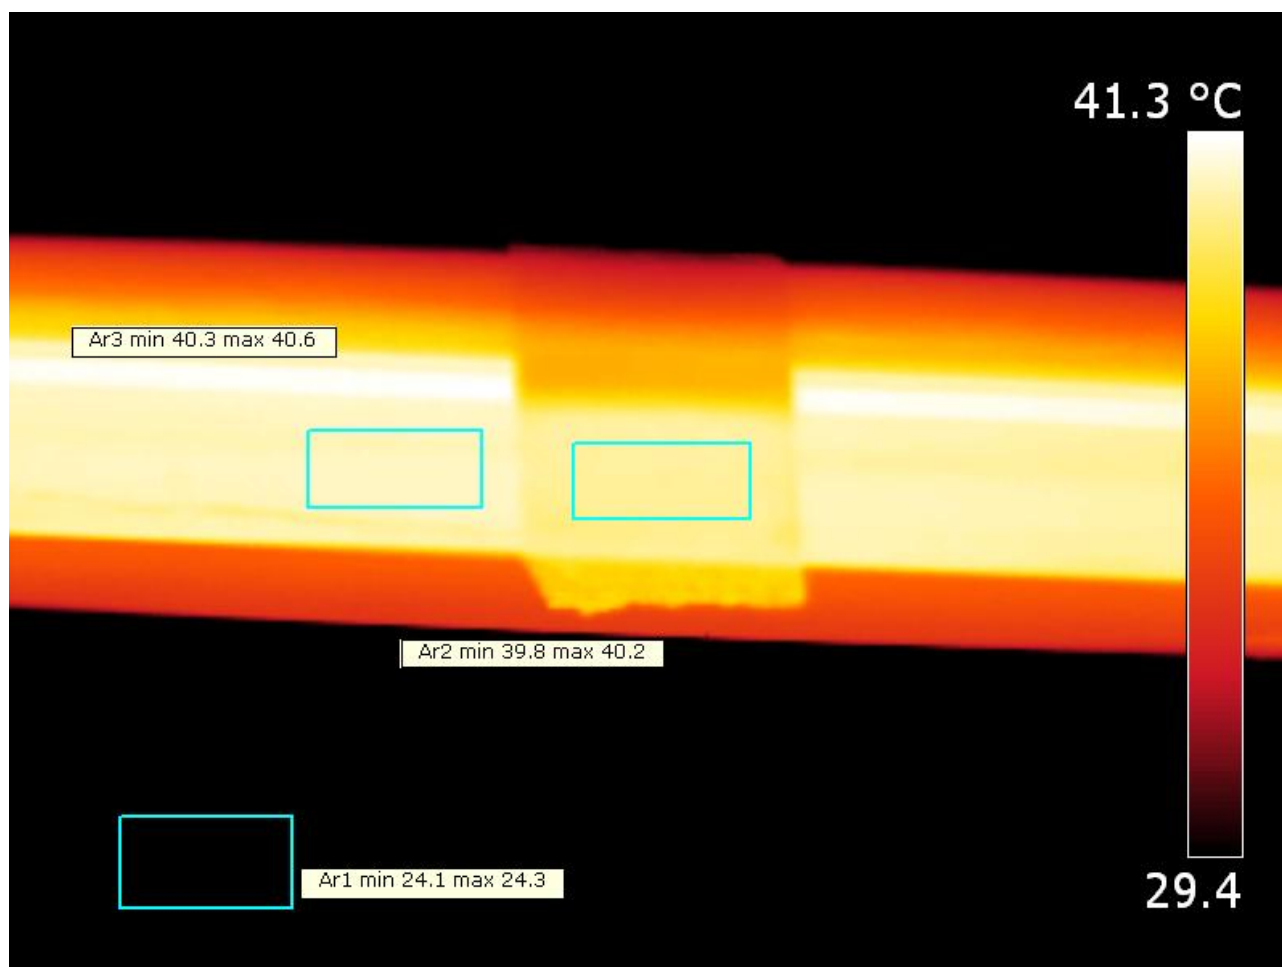


Side view, emissivity check.

## Lamp measurement report – 24 Oct 2010

The aluminum material reads an almost equal temperature than the (low reflecting) masking tape. So the emissivity of the masking tape is about the same as that of the aluminum. This is a high emissivity for the aluminum which means it can radiate heat well.

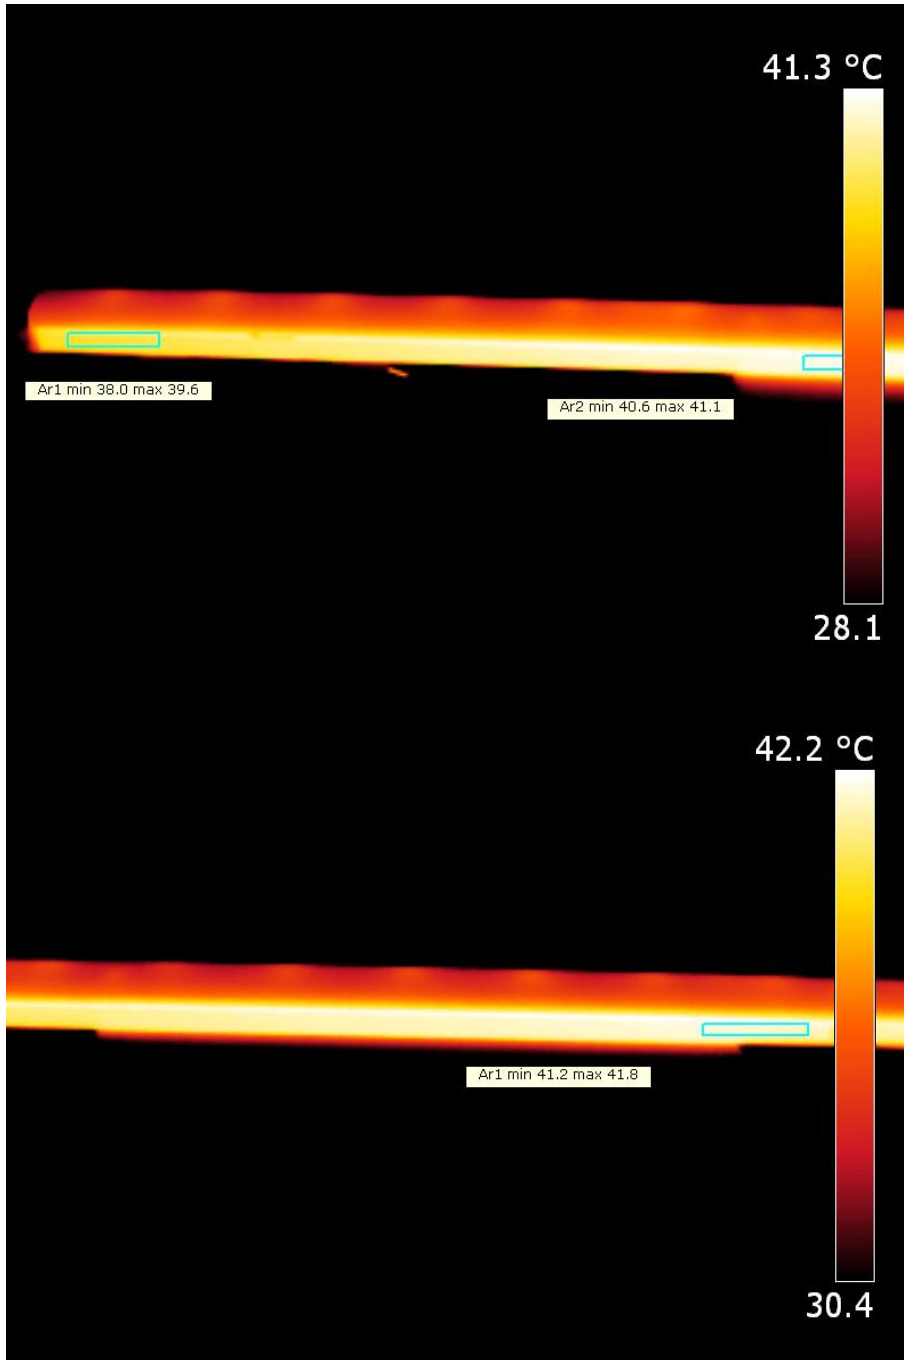

## Lamp measurement report – 24 Oct 2010

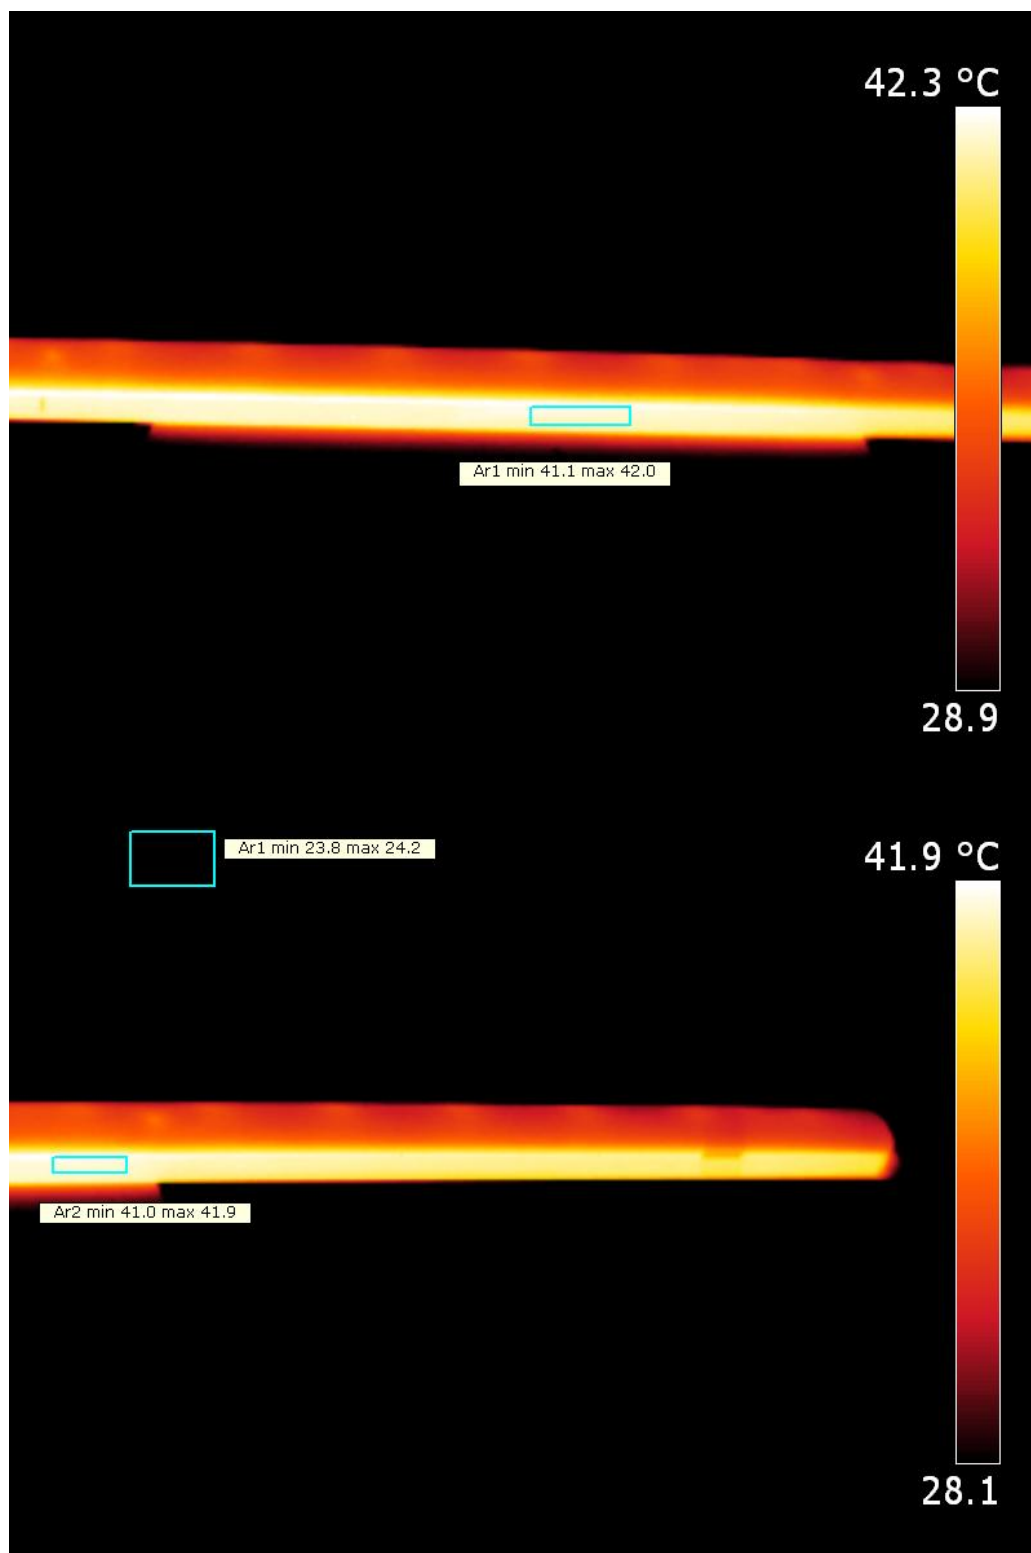


*Pictures of parts of the tube.*

## Lamp measurement report – 24 Oct 2010

status lamp	> 2 hours on
ambient temperature	24 deg C
reflected background temperature	24 deg C
camera	Flir T335
emissivity	0.95 <sup>(1)</sup>
measurement distance	1 m
IFOV <sub>geometric</sub>	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

<sup>(1)</sup> See the text for explanation.

### Color temperature and Spectral power distribution

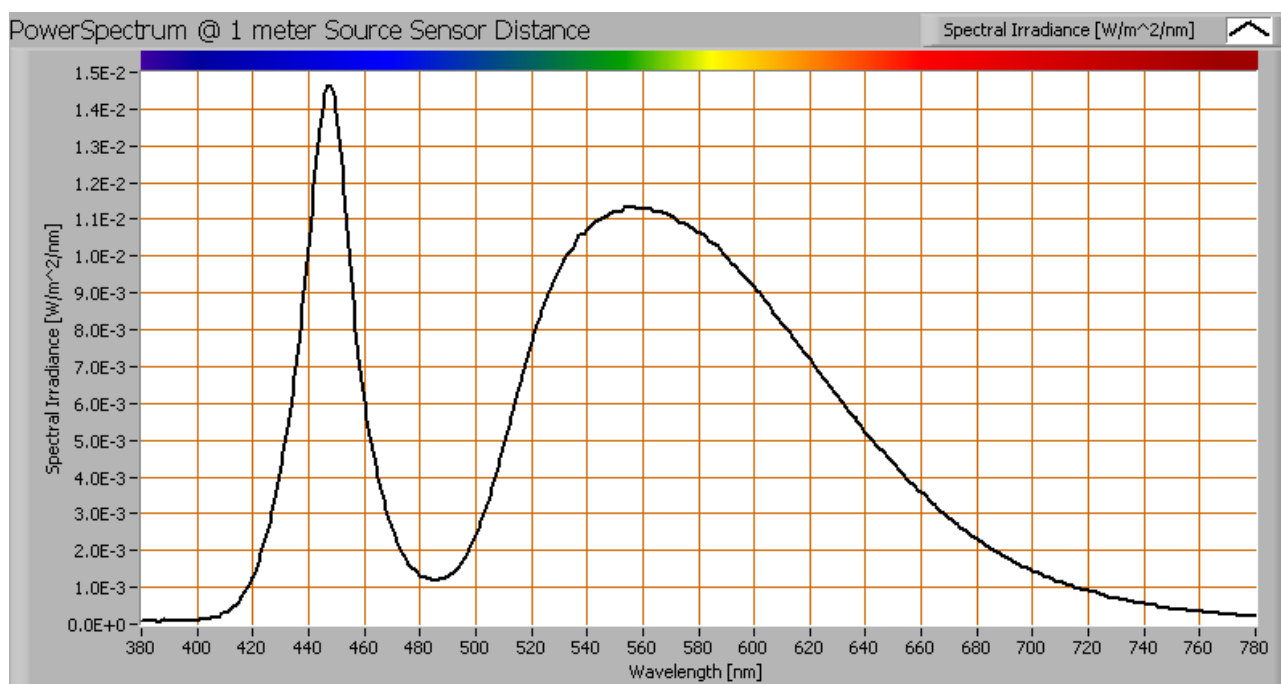


*The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.*

The measured color temperature is about 4700 K which is neutral white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

## Lamp measurement report – 24 Oct 2010

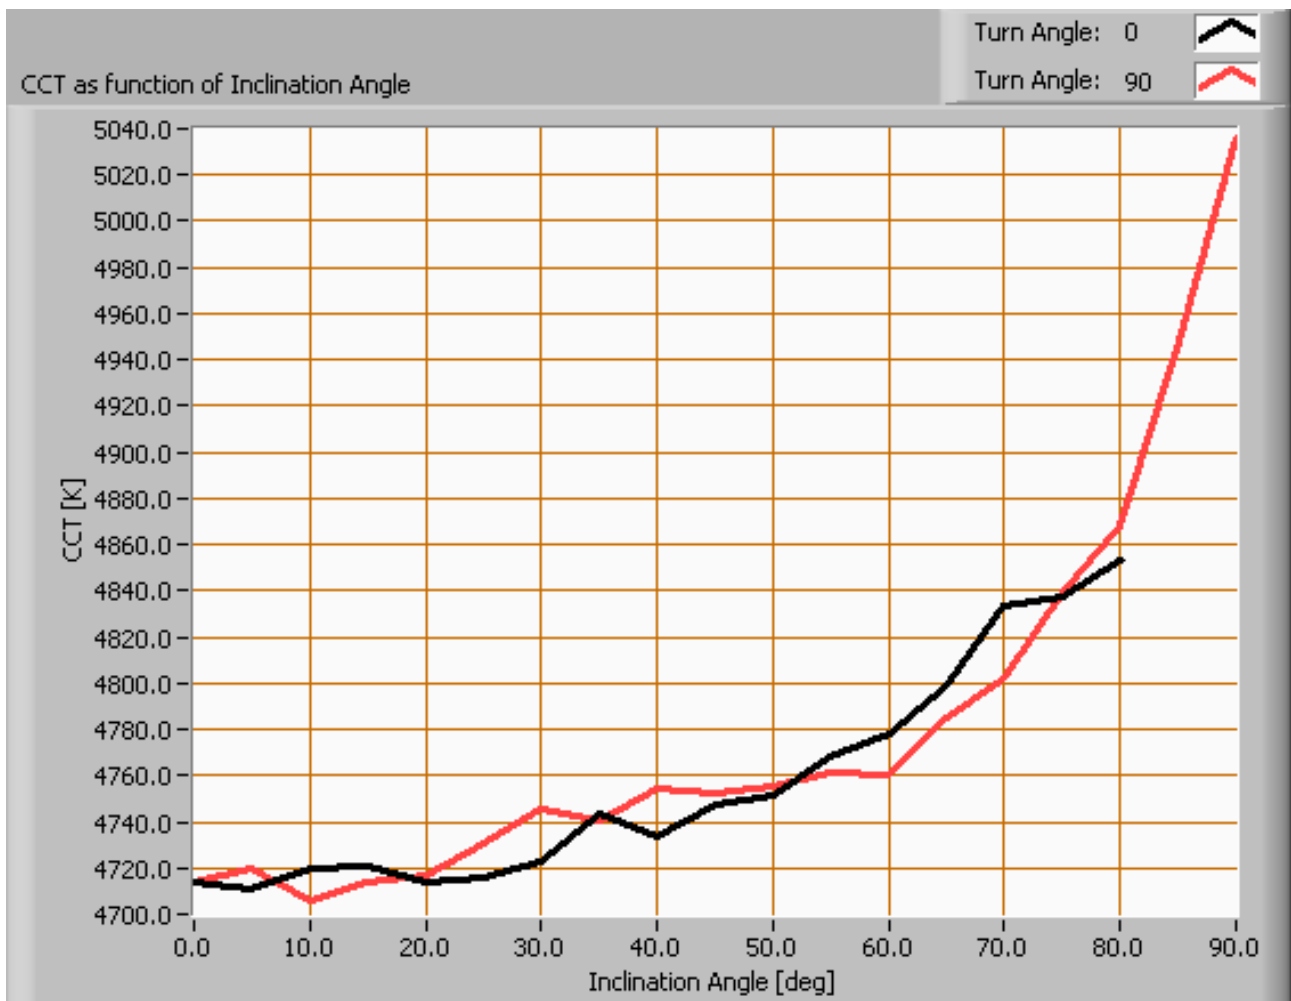

*Color temperature as a function of inclination angle.*


The measurement of CCT is measured for inclination angles up to 80°. Beyond this angle the illuminance is very low (< 5 lux).

The beam angle is 119°, meaning a 59.5° inclination angle. In this area most of the light is present. The variation in correlated color temperature in this area is about 1.5 %.

## Lamp measurement report – 24 Oct 2010

### PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the OLiNo website how this all is determined and the explanation of the graph.

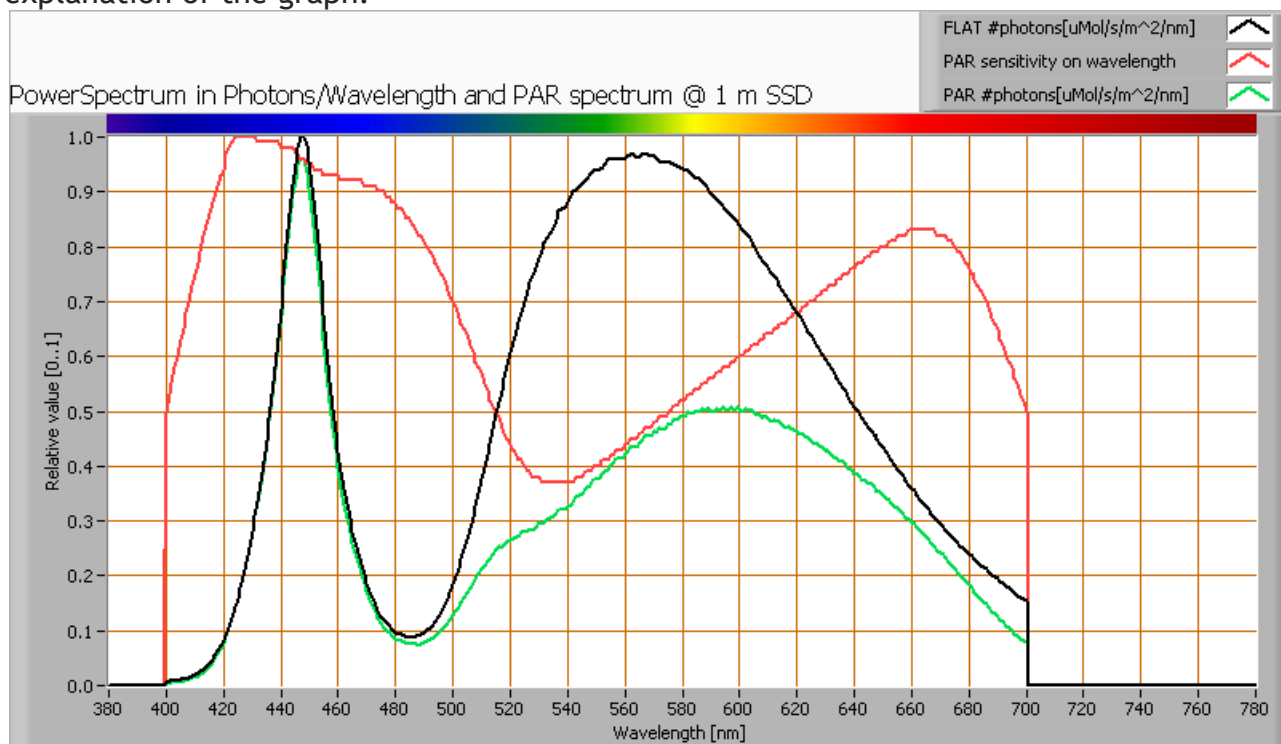

*The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb*


parameter	value	unit
PAR-number	5.3	μMol/s/m <sup>2</sup>
PAR-photon current	16.6	μMol/s
PAR-photon efficacy	0.7	μMol/s/W

The PAR efficiency is 63 % (valid for the PAR wave length range of 400 - 700 nm). So maximally 63 % of the total of photons in the light is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

## Lamp measurement report – 24 Oct 2010

### S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

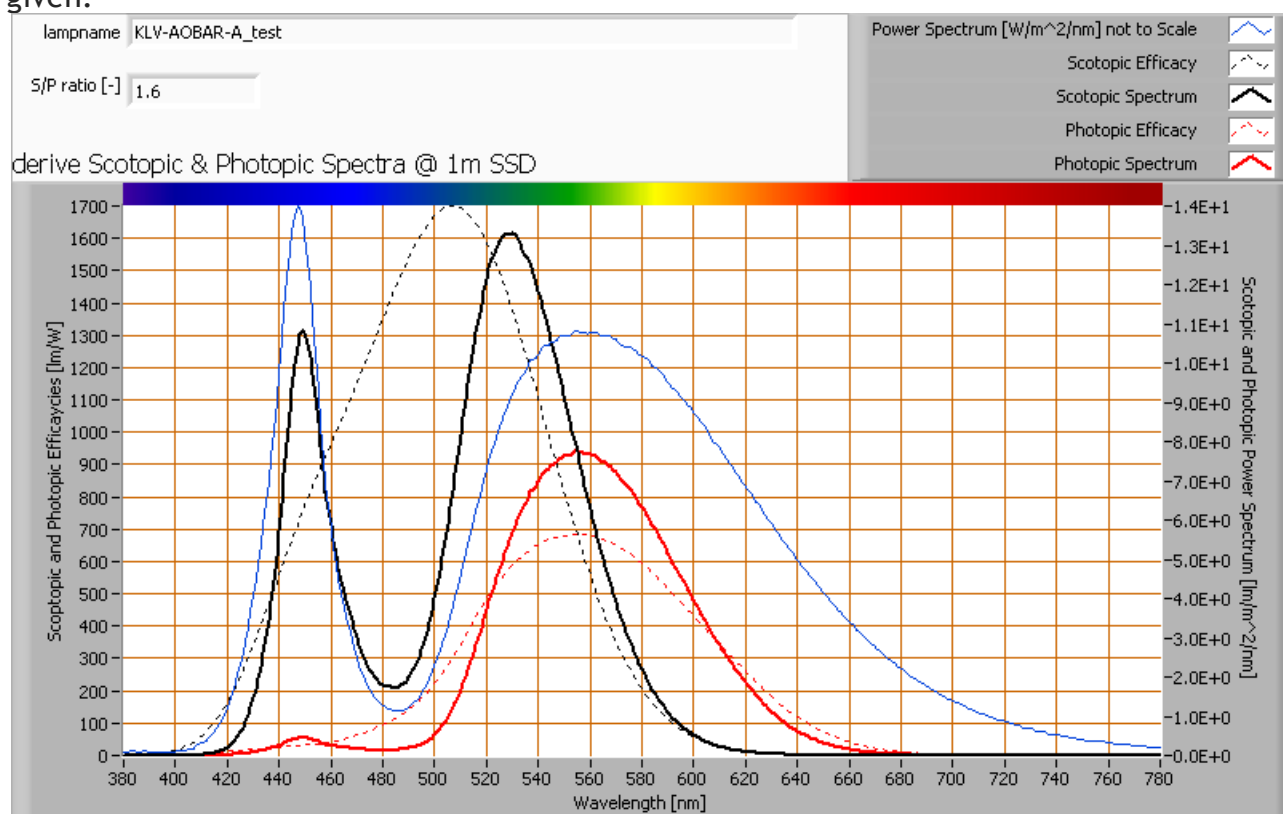

*The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).*


The S/P ratio is 1.6.

More info on S/P ratio can be found on the OliNo website.



## Lamp measurement report – 24 Oct 2010

### Chromaticity diagram

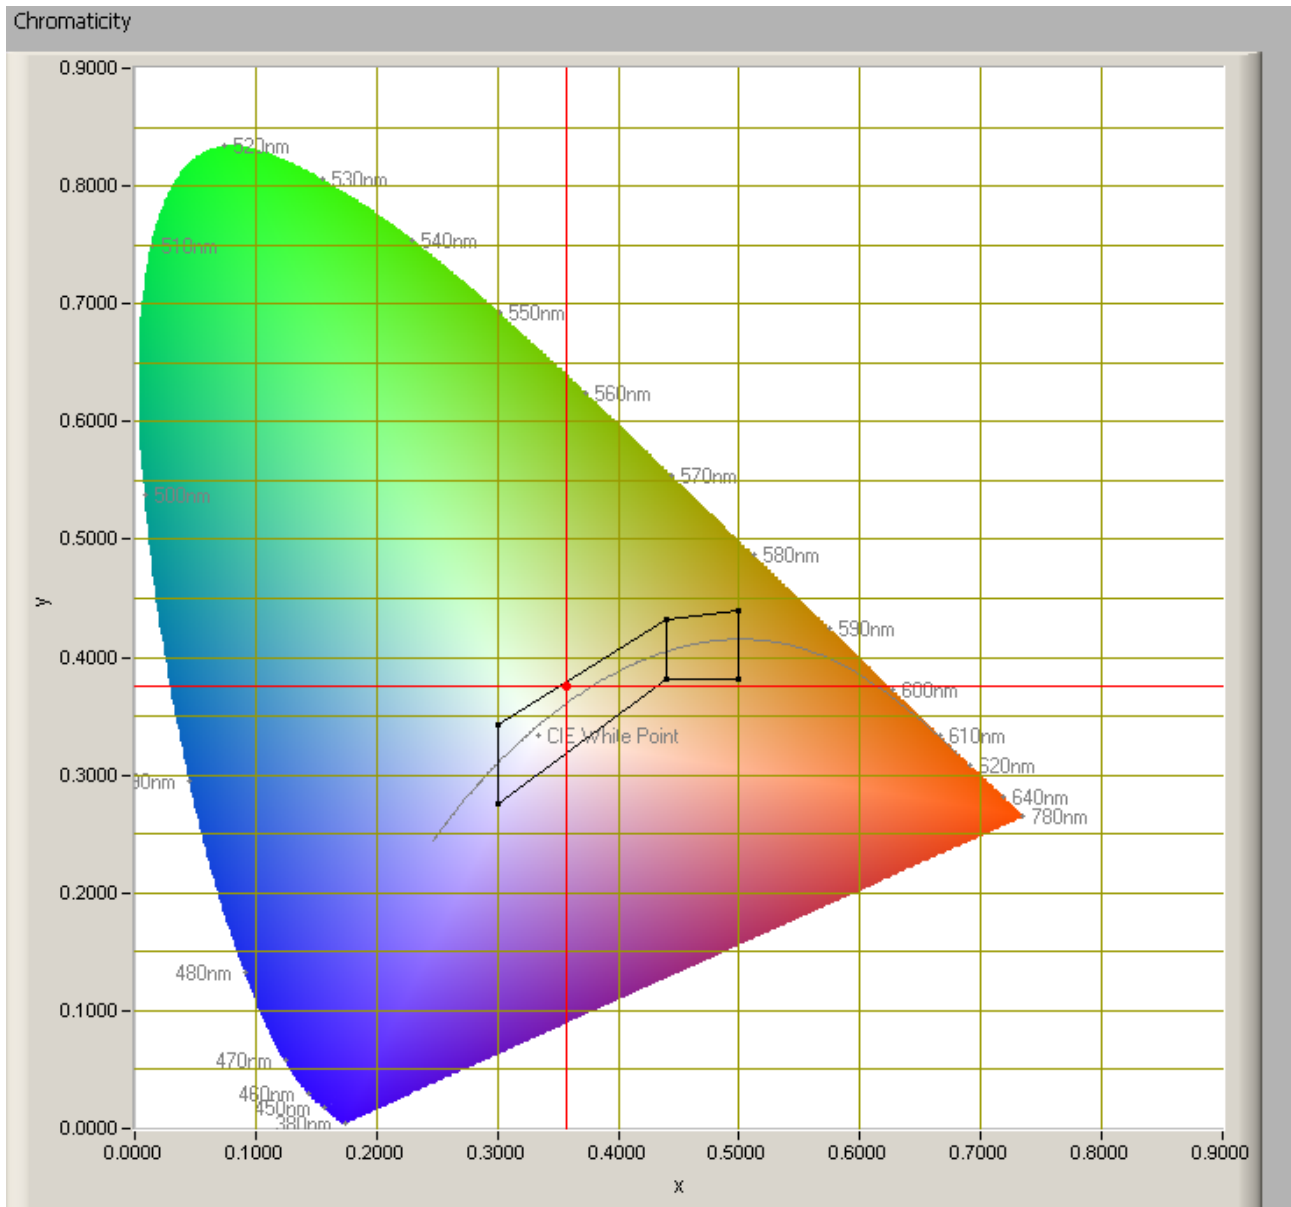

*The chromaticity space and the position of the lamp's color coordinates in it.*

The light coming from this lamp is inside the area of class A. This is an area defined for signal lamps, see also the OliNo website.

Its coordinates are  $x=0.3569$  and  $y=0.3758$ .

## Lamp measurement report – 24 Oct 2010















### Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OliNo website. Each color has an index  $R_x$ , and the first 8 indexes ( $R_1 \dots R_8$ ) are averaged to compute the  $R_a$  which is equivalent to the CRI.

☐ manual

Reference Illuminant: Planckian radiator    CCT: 4710 K

Chromaticity Difference DC= 7.3E-3

R1= 63.7		R8= 55.1	
R2= 71.3		R9= -36.6	
R3= 75.8		R10= 30.6	
R4= 67.5		R11= 60.7	
R5= 63.2		R12= 27.3	
R6= 59.1		R13= 64	
R7= 80.1		R14= 86.1	

**Ra**  
 (mean value of  $R_1 - R_8$ )  
**67**

*CRI of the light of this lightbulb.*

The value of 67 is lower than to the value 80 which is considered a minimum value for indoor usage.


Note: the chromaticity difference is 0.0073 indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.

### Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb

## Lamp measurement report – 24 Oct 2010

parameters measured: illuminance  $E_v$  [lx], the lamp power  $P$  [W] and the luminous efficacy [lm/W].

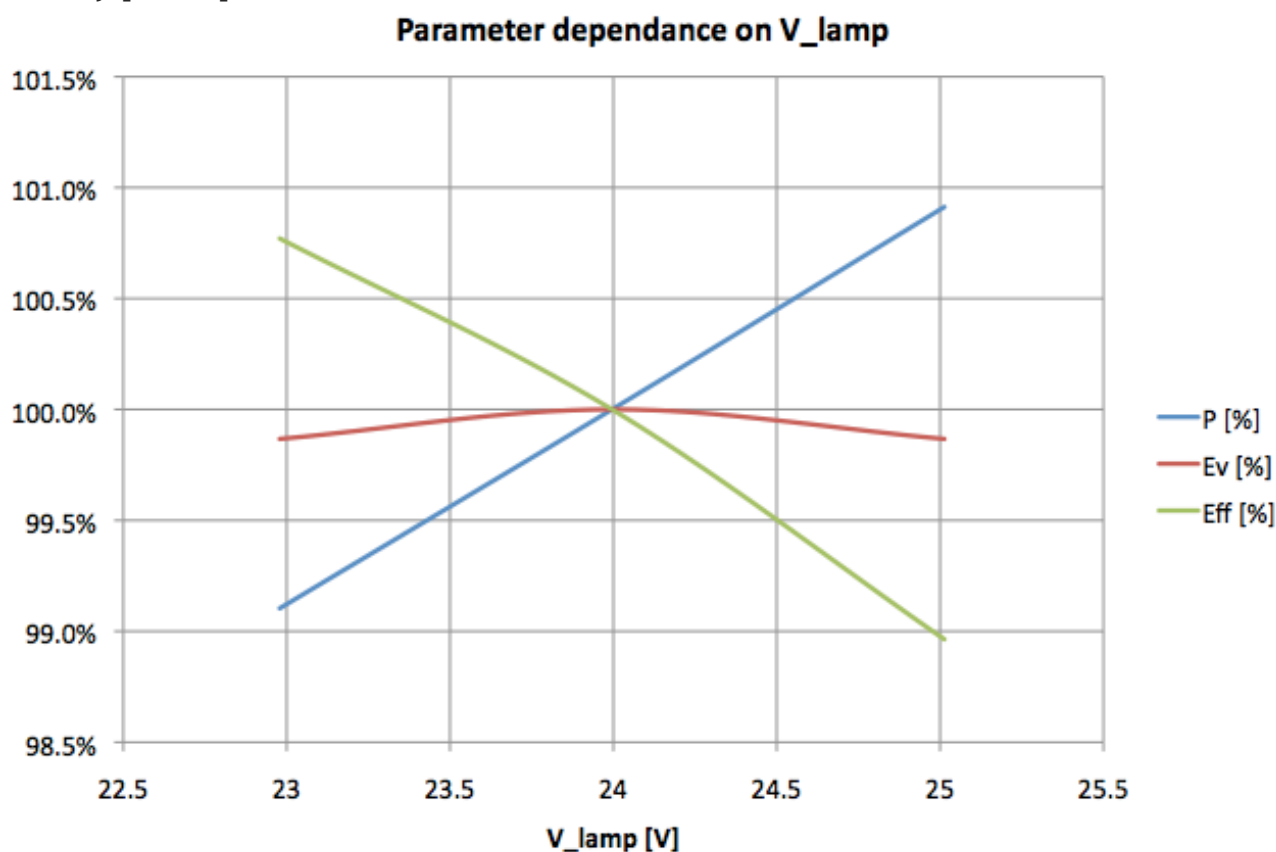

*Lamp voltage dependencies of certain light bulb parameters, where the value at 24 V is taken as 100 %.*


The illuminance and consumed power vary insignificantly when the voltage is varied. When the voltage at 24 V varies with + and - 0.5 V, then the illuminance varies  $\approx 0.5$  %, so when abrupt voltage changes occur this effect is not visible in the illuminance output.

### Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance  $E_v$  [lx], the lamp power  $P$  [W] and the luminous efficacy [lm/W].

## Lamp measurement report – 24 Oct 2010

### **E\_v [%] after startup**

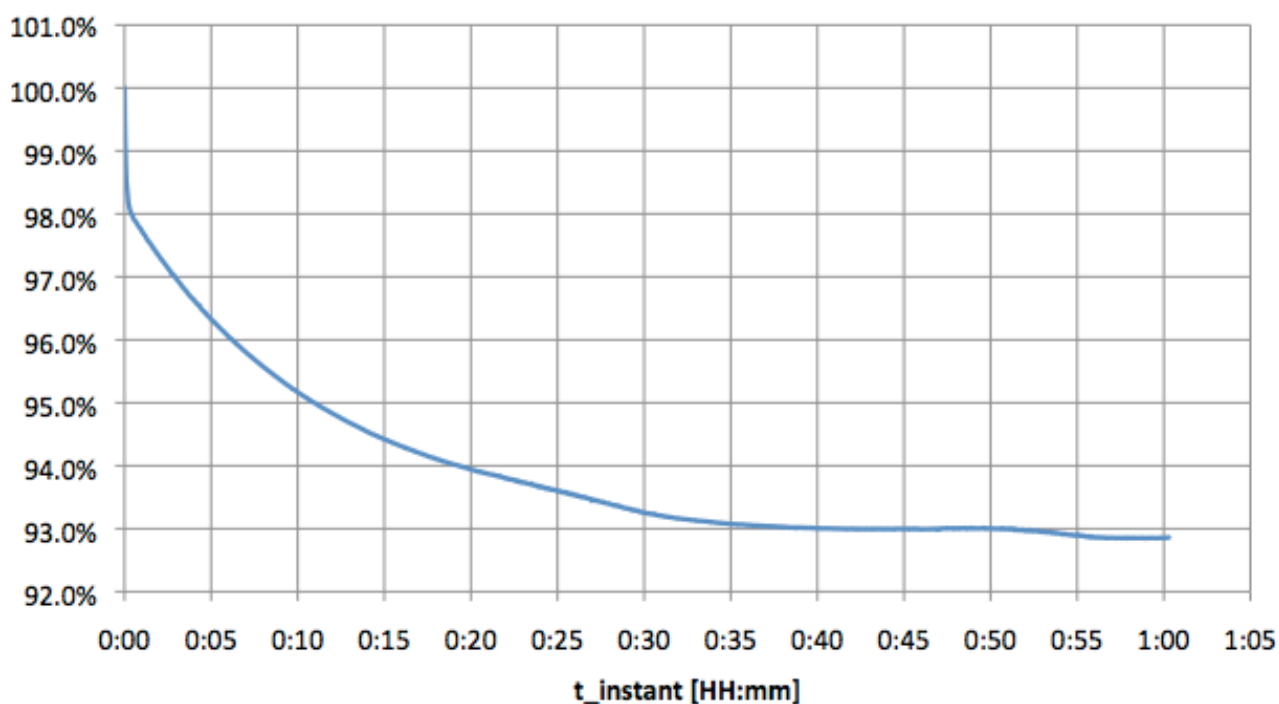


*Effect of warming up on different light bulb parameters. The 100 % level is put at the beginning.*

The warm up time is about 35 minutes during which the illuminance decreases 7 % and the consumed power does not vary significantly.

### Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the OLiNo site for more information.

## Lamp measurement report – 24 Oct 2010

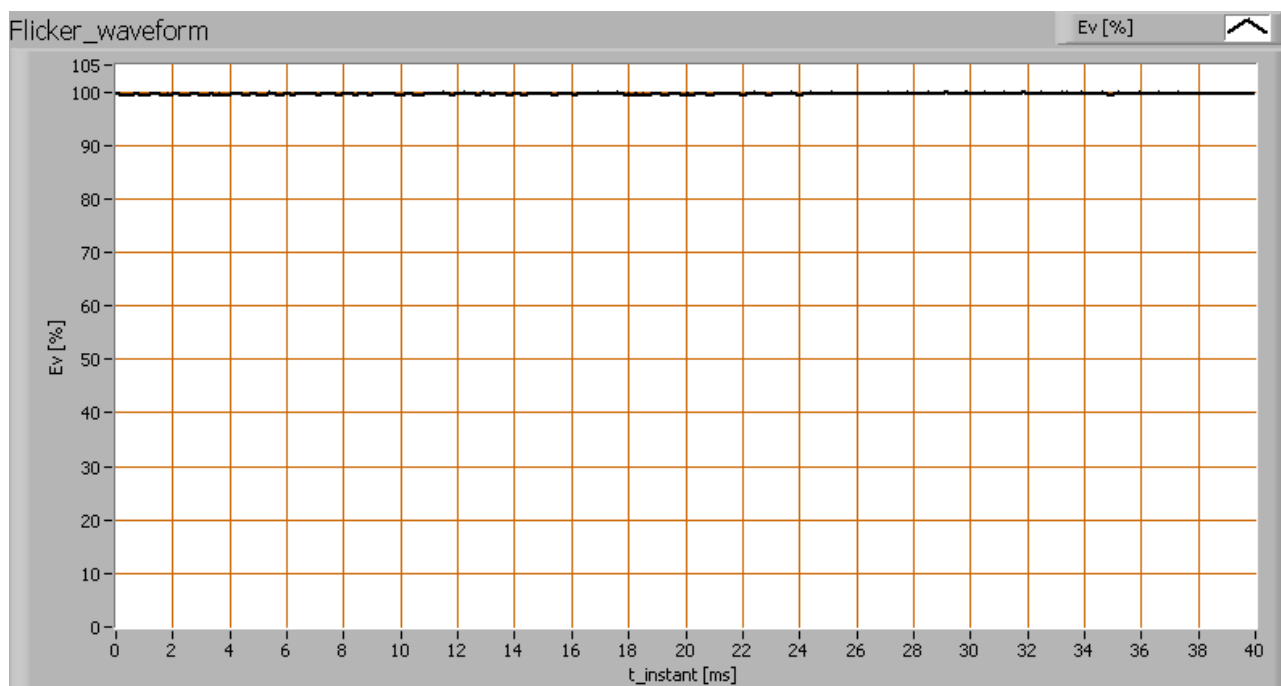

*The measure of fast illuminance variation of the light of the light bulb*

parameter	value	unit
Flicker frequency	1474	Hz
Illuminance modulation index	0	%

The illuminance modulation index is computed as:  $(\max\_Ev - \min\_Ev) / (\max\_Ev + \min\_Ev)$ .

### Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.



## **Lamp measurement report – 24 Oct 2010**

### **License**

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly probited to change or alter parts of the report and/or republish it in a modified content.