

Lamp measurement report – 21 Dec 2010

Ledspot 3WMR16L

by

SoLuXima



Lamp measurement report – 21 Dec 2010

Summary measurement data


parameter	meas. result	remark
Color temperature	3444 K	Warm white (close to neutral white)
Luminous intensity I_v	673 Cd	Measured straight underneath the lamp.
Illuminance modulation index	0 %	Measured straight underneath the lamp. Is a measure for the amount of flickering.
Beam angle	22 deg	22° for all C planes as this lamp has a symmetry along the 1st axis.
Power P	3.6 W	
Power Factor	n.a.	A DC power supply was used to test. This means that there is no blind power.
THD	n.a. %	Total Harmonic Distortion is not present due to the usage of a DC Voltage which results in a DC current.
Luminous flux	176 Lm	
Luminous efficacy	49 Lm/W	Note that a DC power supply has been used. This efficacy is for the led only excluding the efficacy of a power supply converting grid voltage to the voltage or current needed for the led. Normally a power supply or converter adds in-efficacy to the total system unless this lamp is to be connected to for instance a battery.
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI_Ra	67	Color Rendering Index.
Coordinates chromaticity diagram	x=0.4136 and y=0.4065	

Lamp measurement report – 21 Dec 2010

Fitting	MR16/GU5.3	This lamp was connected to a 12 V DC source.
PAR-value	6.1 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.
PAR-photon efficacy	0.4 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.4	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
D x H external dimensions	50 x 44 mm	External dimensions of the lamp.
D luminous area	42 mm	Dimensions of the luminous area (used in Eulumdat file). This is the surface of the smallest circle around the leds.
General remarks		<p>The ambient temperature during the whole set of measurements was 23.9-25.6 deg C.</p> <p>The temperature of the housing gets about 46 degrees hotter than ambient temperature.</p> <p>Warm up effect: during the warm up time the illuminance decreases with about 14 % and the consumed power decreases with 6 %.</p> <p>Voltage dependency: the power consumption and illuminance vary, when the power voltage varies between 11-13 V.</p>

Lamp measurement report – 21 Dec 2010

Overview table

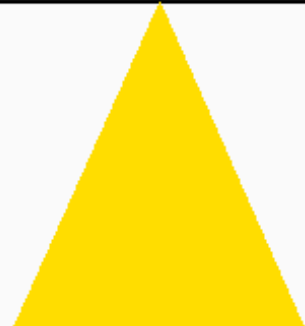m.	Ø 50%		CO-180: 22° C90-270: 22° 	E (lux)	Luminaire Efficacy
	CO-180	C90-270			49 (lumen per Watt)
0.25	0.1	0.1		12210	Half-peak diam CO-180
0.5	0.19	0.19		3053	0.38 x diameter(m)
1	0.38	0.38		763	Half-peak diam C90-270
1.5	0.58	0.58		339	0.38 x diameter(m)
3	1.15	1.15		85	Illuminance
4	1.54	1.54		48	763 / distance ² (lux)
5	1.92	1.92		31	Total Output
					176 (lumen)


The overview table is explained on the OLiNo website.

Please note that this overview table makes use of calculations, use this data with care as explained on the OLiNo site. E (lux) values are not accurate, when within 5 x 42 mm ≈ 210 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.


EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OLiNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain. Herewith the labels for this lamp in color and black and white.

Lamp measurement report – 21 Dec 2010

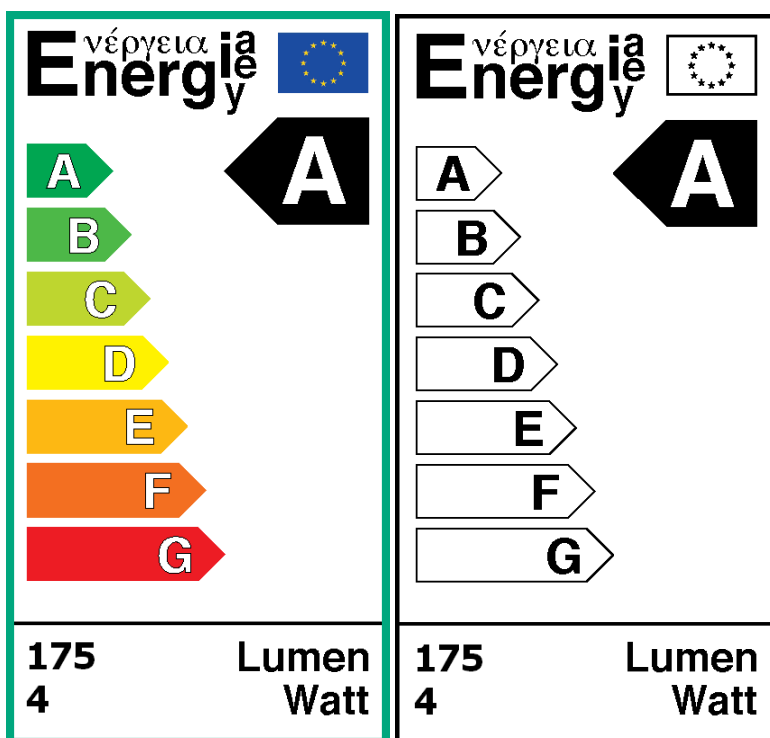

EU energy label of this lamp

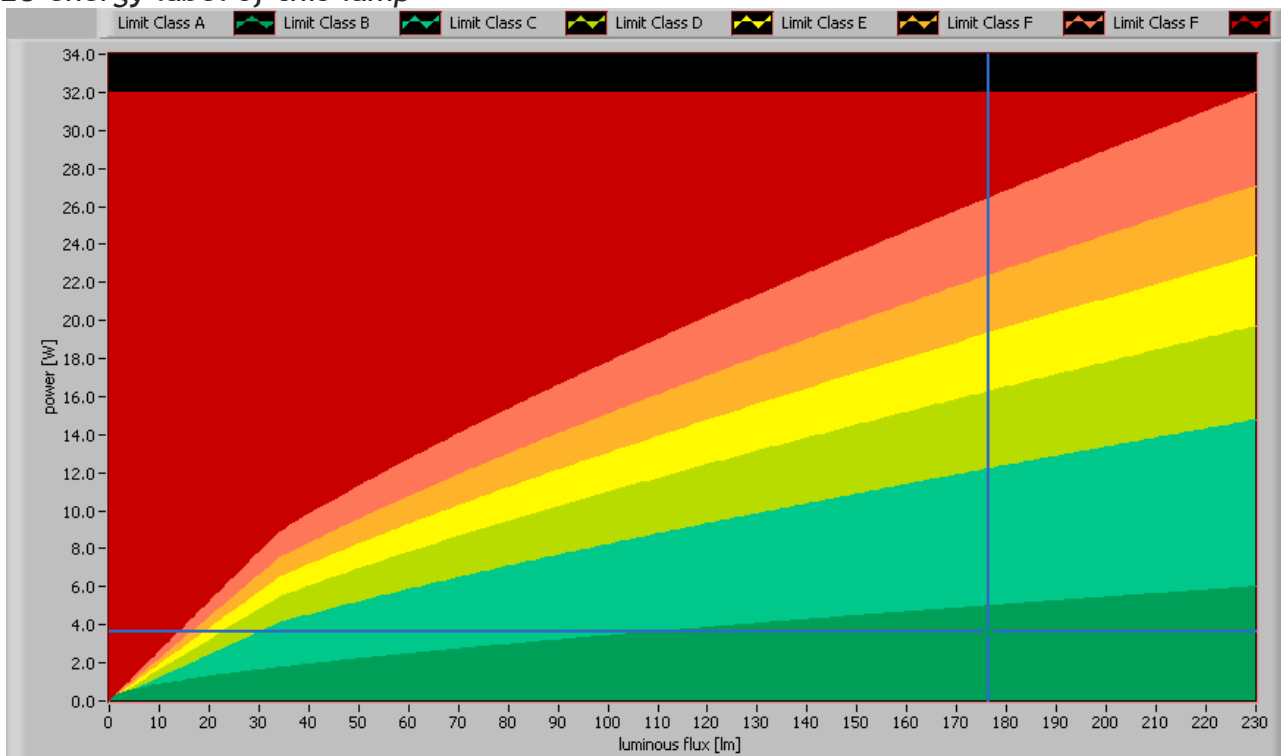


The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.

Lamp measurement report – 21 Dec 2010

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. It is explained on the OliNo site.

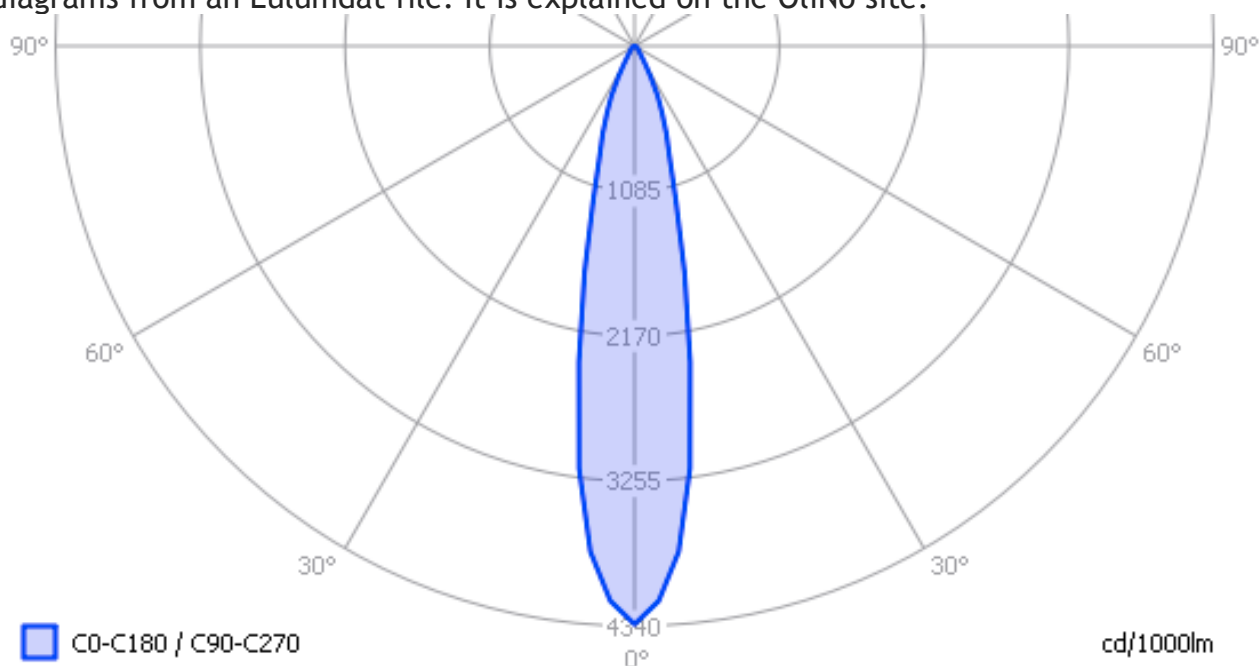


The light diagram giving the radiation pattern.

It indicates the luminous intensity around the light bulb. The C0-C180 plane and C90-C270 give the same result as the lamp is semmetrical along its 1st axis.

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.


Lamp measurement report – 21 Dec 2010

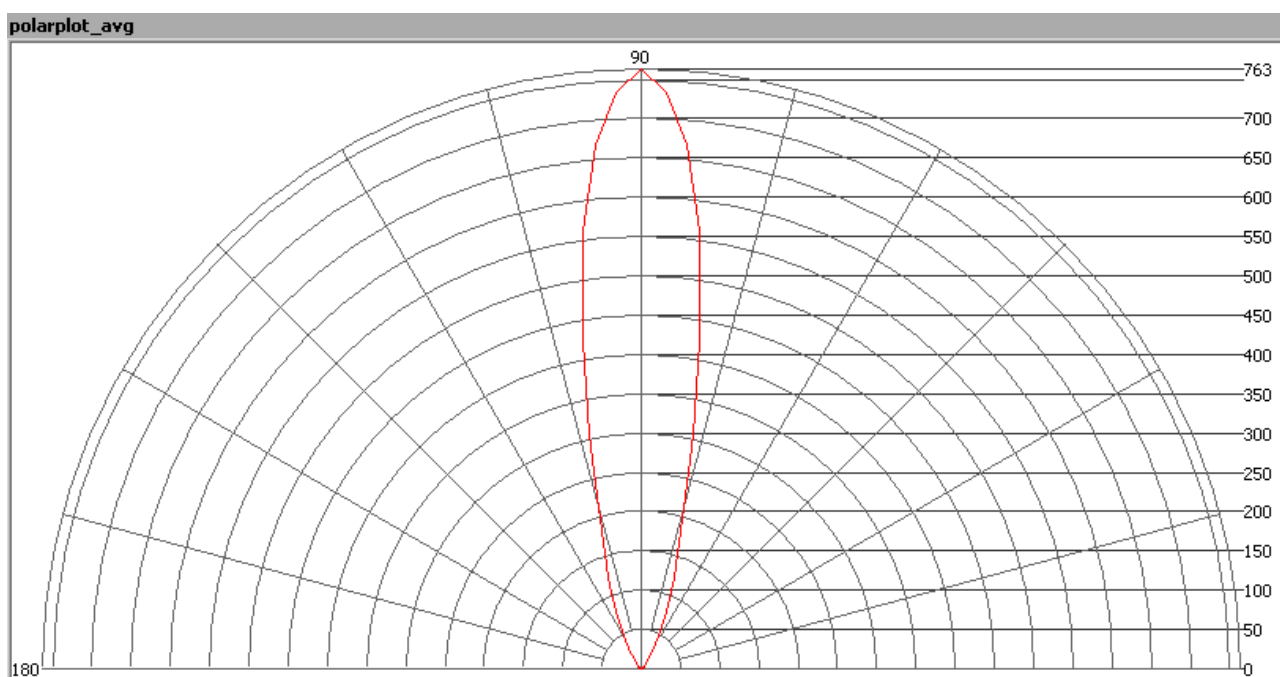

The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

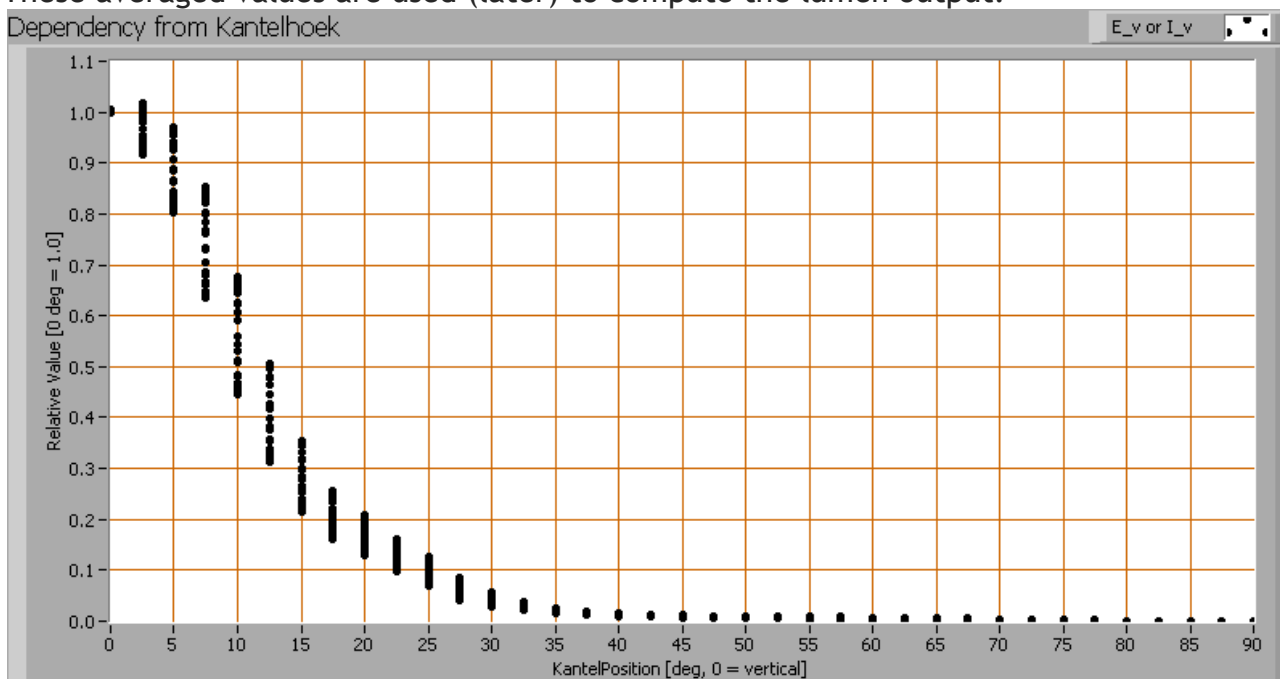

Intensity data of every measured turn angle at each inclination angle.



Lamp measurement report – 21 Dec 2010

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 22° for the C0-C180 and the C90-C270 plane.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 176 Lm.

Luminous efficacy

The luminous flux being 176 Lm, and the power of the light bulb being 3.6 W, yields a luminous efficacy of 49 Lm/W.

The reported efficacy is for the ledmodules only, without an eventual power supply needed to transform 230 V AC into 12 V DC. Such a power supply would normally lead to additional power consumption.


Electrical properties

The lamp was used on DC power and therefore no blind currents.

Lamp voltage	12.01 V DC
Lamp current	0.300 A
Power P	3.6 W
Apparent power S	n.a. VA
Power factor	n.a.

Lamp measurement report – 21 Dec 2010

Temperature measurements lamp

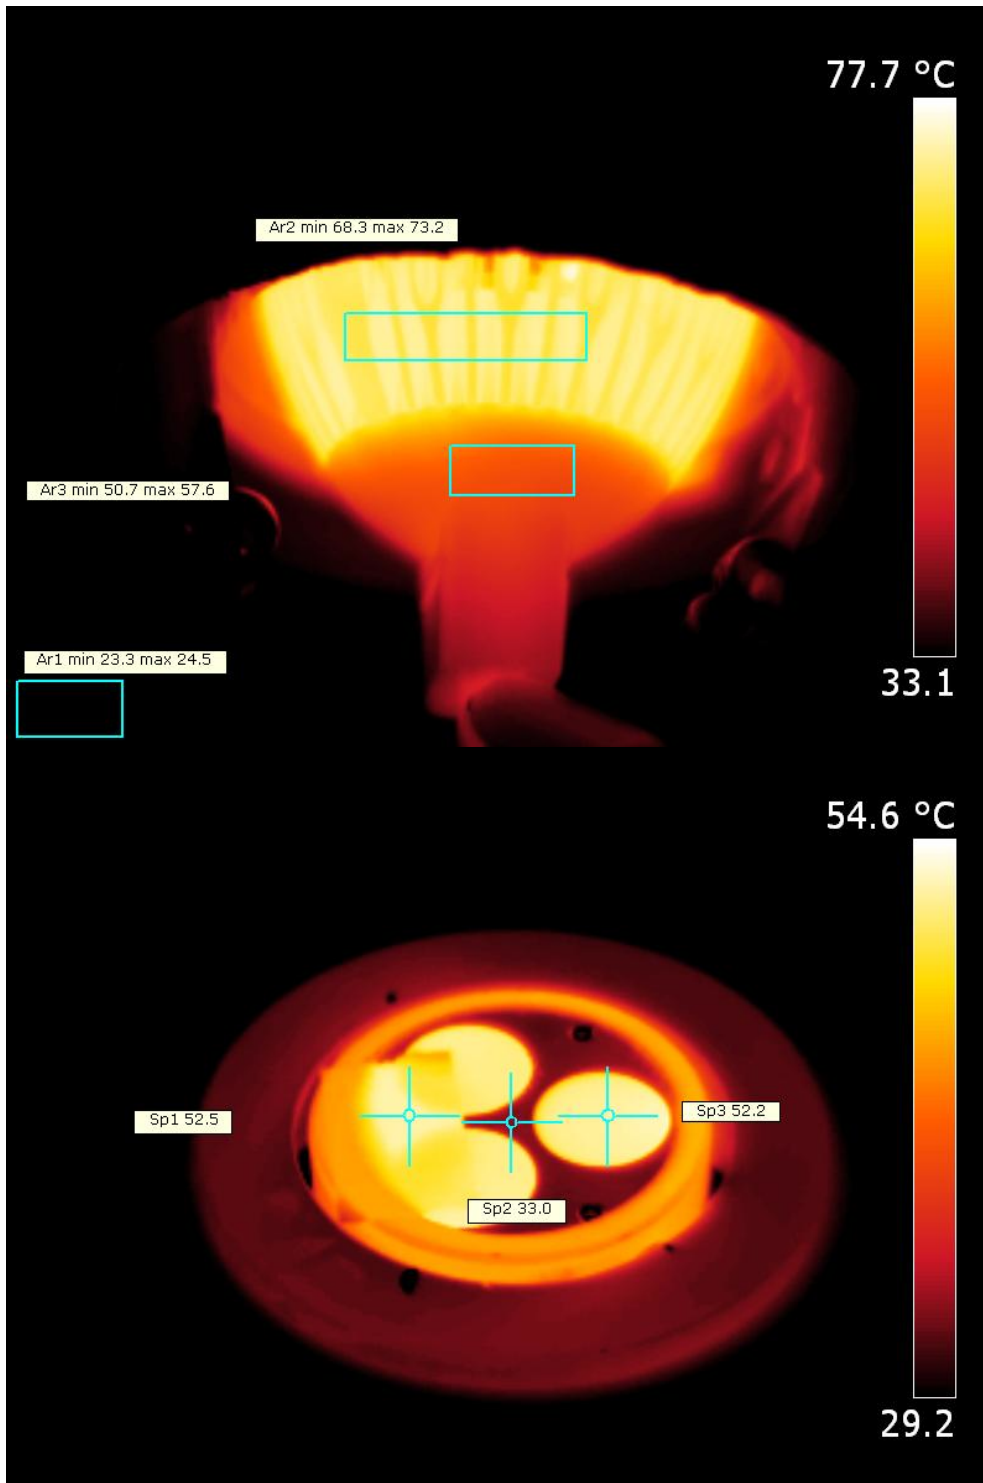

Side view and front view.

Lamp measurement report – 21 Dec 2010


The aluminum on the side is well capable of emitting the heat, hence the emissivity is taken to be 0.95.

This is not the case for the aluminum at the front, that is polished alu which reflects a lot of the ambient temperature during an IR measurement. For that reason the tape was used to be able to make a correct measurement.

status lamp	> 2 hours on
ambient temperature	24 deg C
reflected background temperature	24 deg C
camera	Flir T335
emissivity	0.95 ⁽¹⁾
measurement distance	0.3 m
IFOV _{geometric}	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

⁽¹⁾ See the text for explanation.

Color temperature and Spectral power distribution

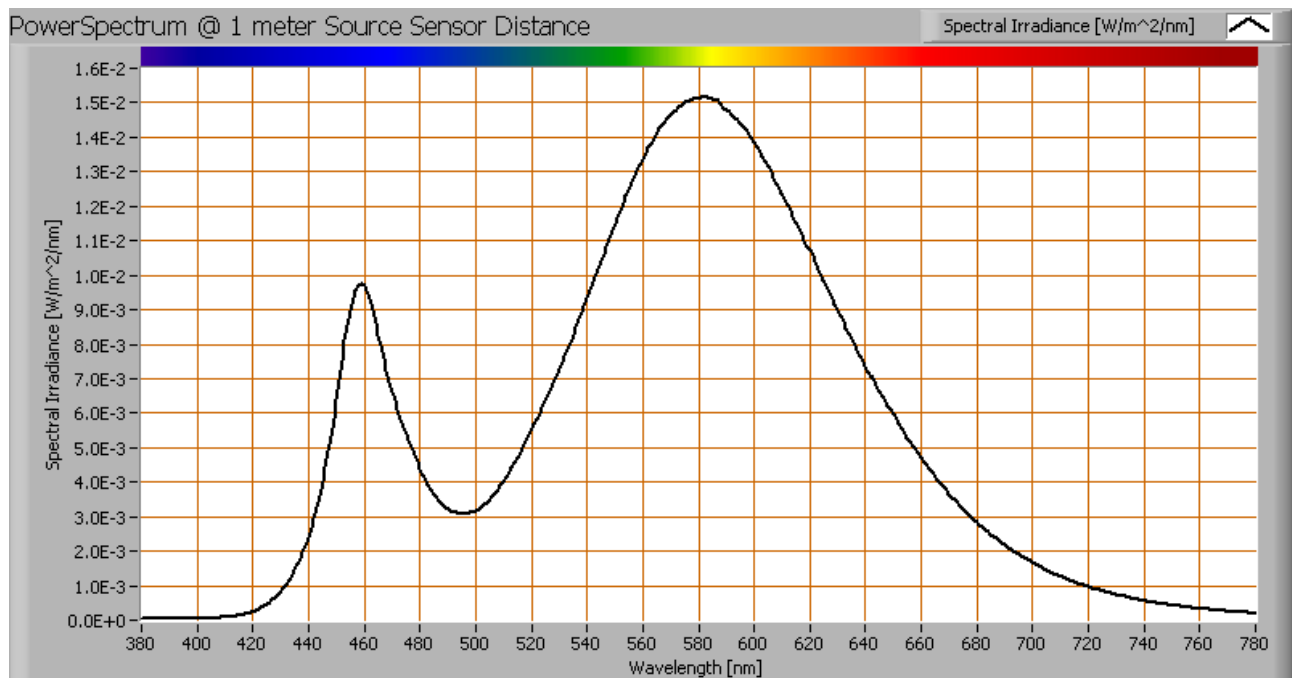


The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.

Lamp measurement report – 21 Dec 2010

The measured color temperature is about 3450 K which is warm white (close to neutral white).

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

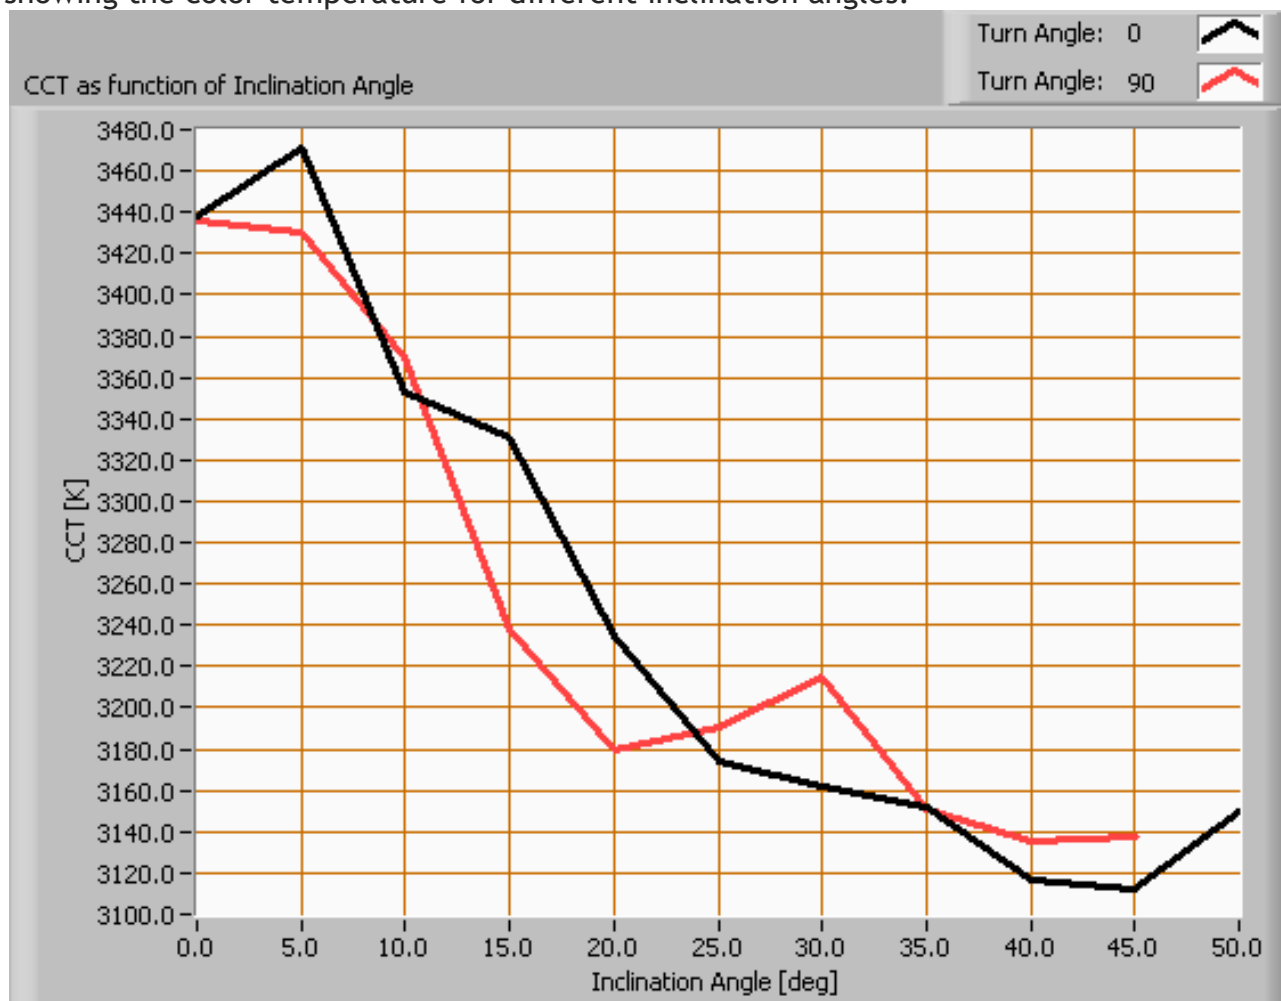

Color temperature as a function of inclination angle.


The measurement of CCT is measured for inclination angles up to 45°. Beyond this angle the illuminance is very low (< 5 lux).

The beam angle is 22°, meaning a 11° inclination angle. In this area most of the light is present. The variation in correlated color temperature in this area is about $\approx 3\%$.

Lamp measurement report – 21 Dec 2010

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the OliNo website how this all is determined and the explanation of the graph.

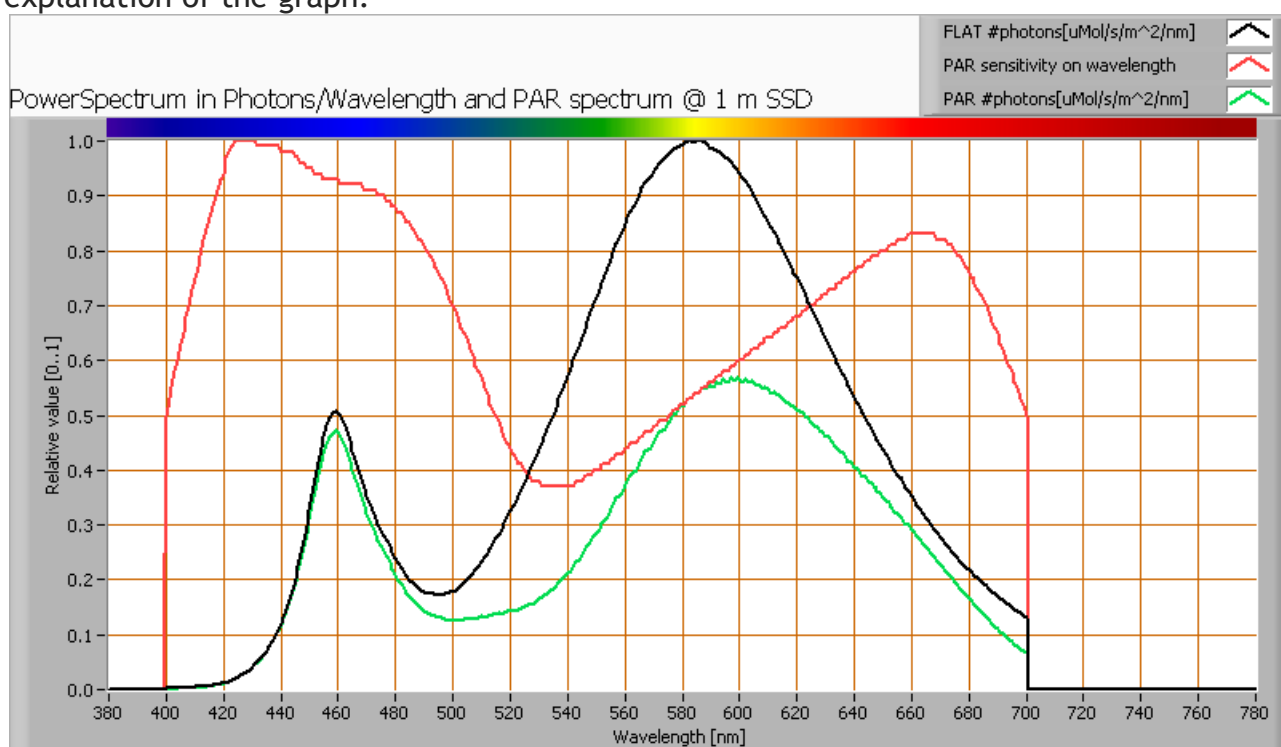

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb


parameter	value	unit
PAR-number	6.1	$\mu\text{Mol/s/m}^2$
PAR-photon current	1.4	$\mu\text{Mol/s}$
PAR-photon efficacy	0.4	$\mu\text{Mol/s/W}$

The PAR efficiency is 62 % (valid for the PAR wave length range of 400 - 700 nm). So maximally 62 % of the total of photons in the light is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

Lamp measurement report – 21 Dec 2010

S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

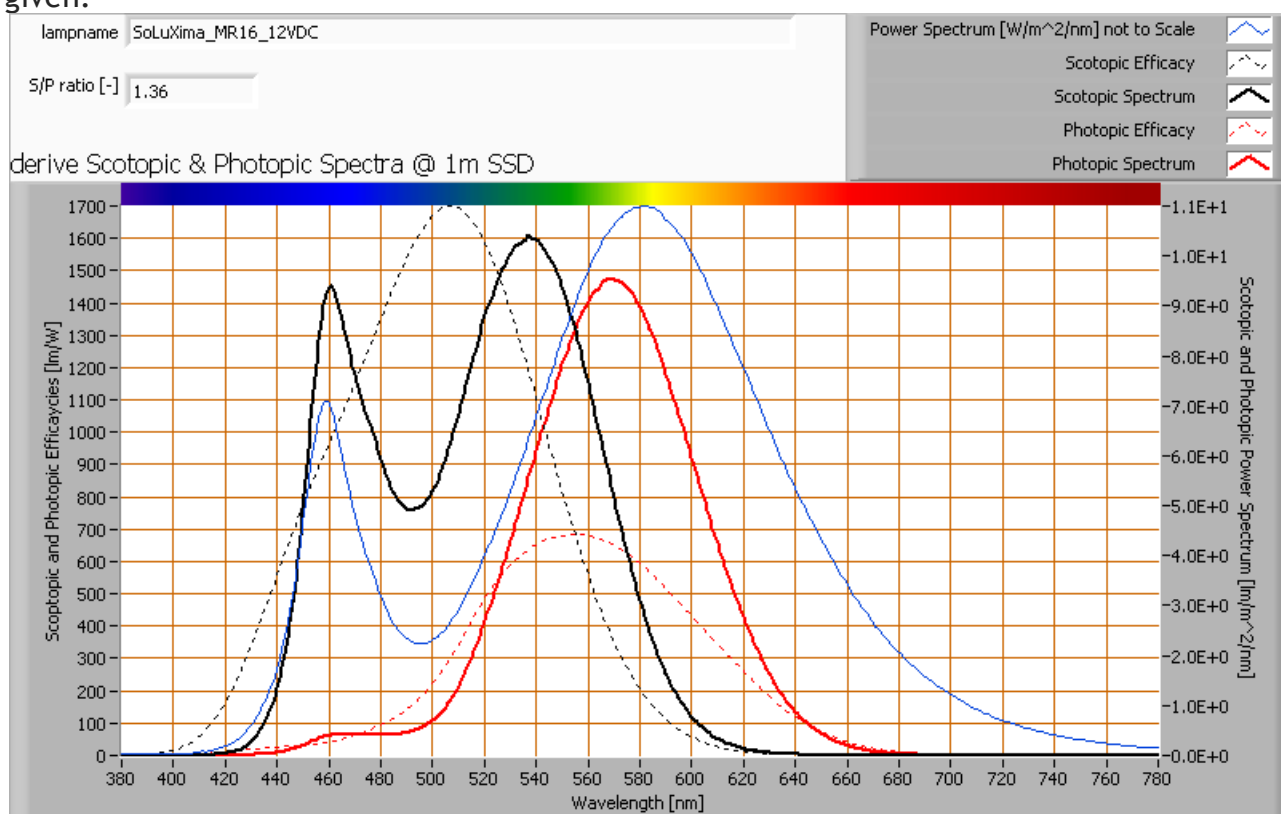


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio is 1.4.

More info on S/P ratio can be found on the OliNo website.

Lamp measurement report – 21 Dec 2010

Chromaticity diagram

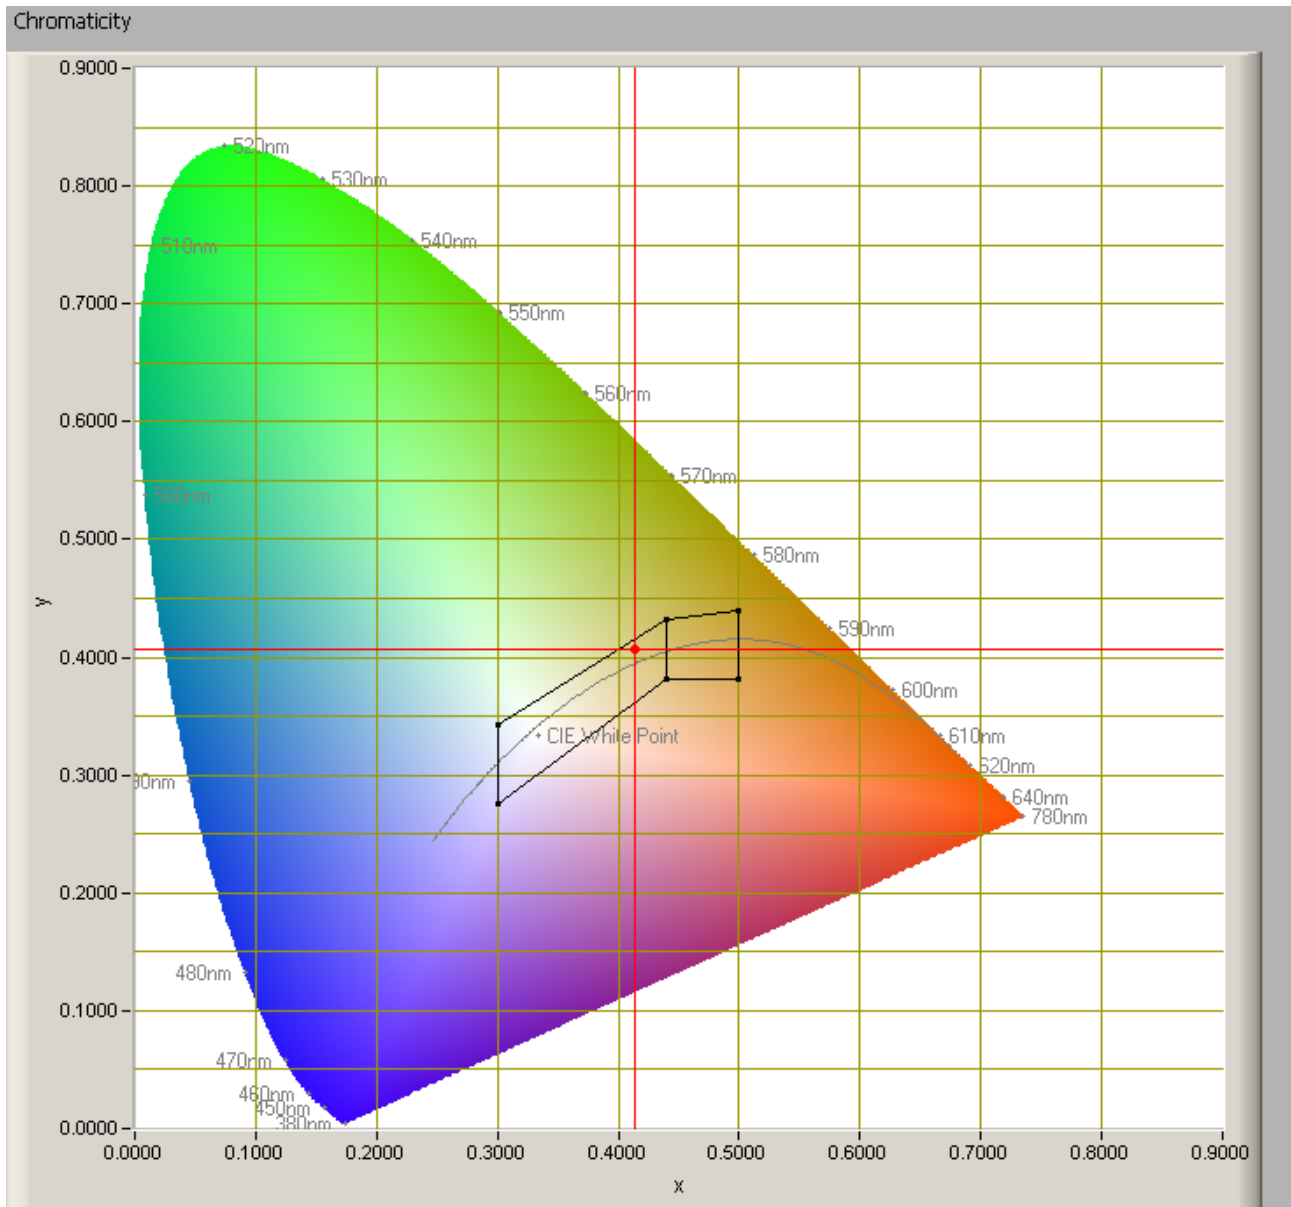

The chromaticity space and the position of the lamp's color coordinates in it.

The light coming from this lamp is inside the area of class A. This is an area defined for signal lamps, see also the OliNo website.

Its coordinates are $x=0.4136$ and $y=0.4065$.

Lamp measurement report – 21 Dec 2010

Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OliNo website. Each color has an index R_x , and the first 8 indexes ($R_1 \dots R_8$) are averaged to compute the R_a which is equivalent to the CRI.

☐ manual

Reference Illuminant

Planckian radiator















 CCT

3444

 K

Chromaticity Difference DC=

5.0E-3

R1= 61.2		R8= 38.6		R_a (mean value of R1 - R8) <div>67.1</div>
R2= 80.5		R9= -50.9		
R3= 93.1		R10= 53.4		
R4= 56.5		R11= 45.3		
R5= 59.8		R12= 37.4		
R6= 70.3		R13= 65.2		
R7= 76.7		R14= 96.1		

CRI of the light of this lightbulb.

The value of 67 is lower than the value 80 which is considered a minimum value for indoor usage.


Note: the chromaticity difference is 0.0050 indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb

Lamp measurement report – 21 Dec 2010

parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

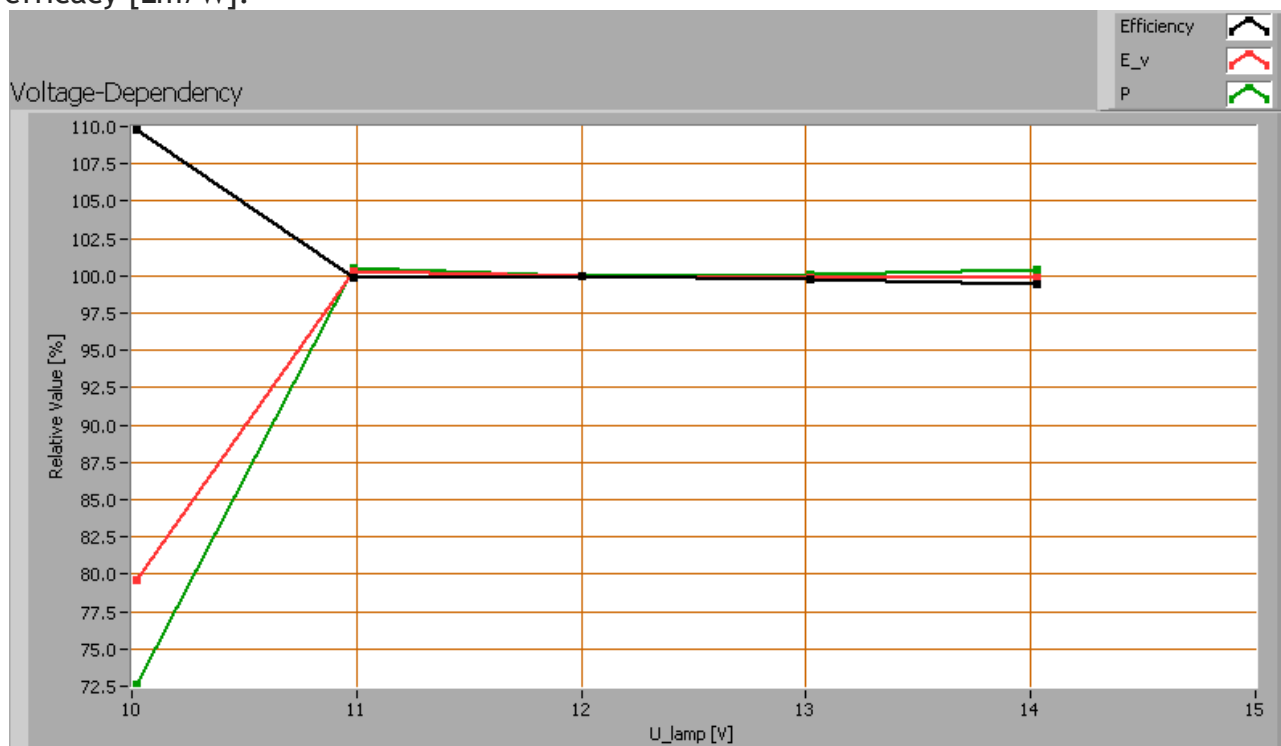

Lamp voltage dependencies of certain light bulb parameters, where the value at 12 V is taken as 100 %.


The illuminance and consumed power do not vary significantly when the voltage is varied between 11-13 V DC. Voltages below 11 V result in a falldown of both consumed power as well as illuminance.

When the voltage at 12 V varies with + and - 0.25 V, then the illuminance varies < 1 %, so when abrupt voltage changes occur this effect is not visible in the illuminance output.

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

Lamp measurement report – 21 Dec 2010

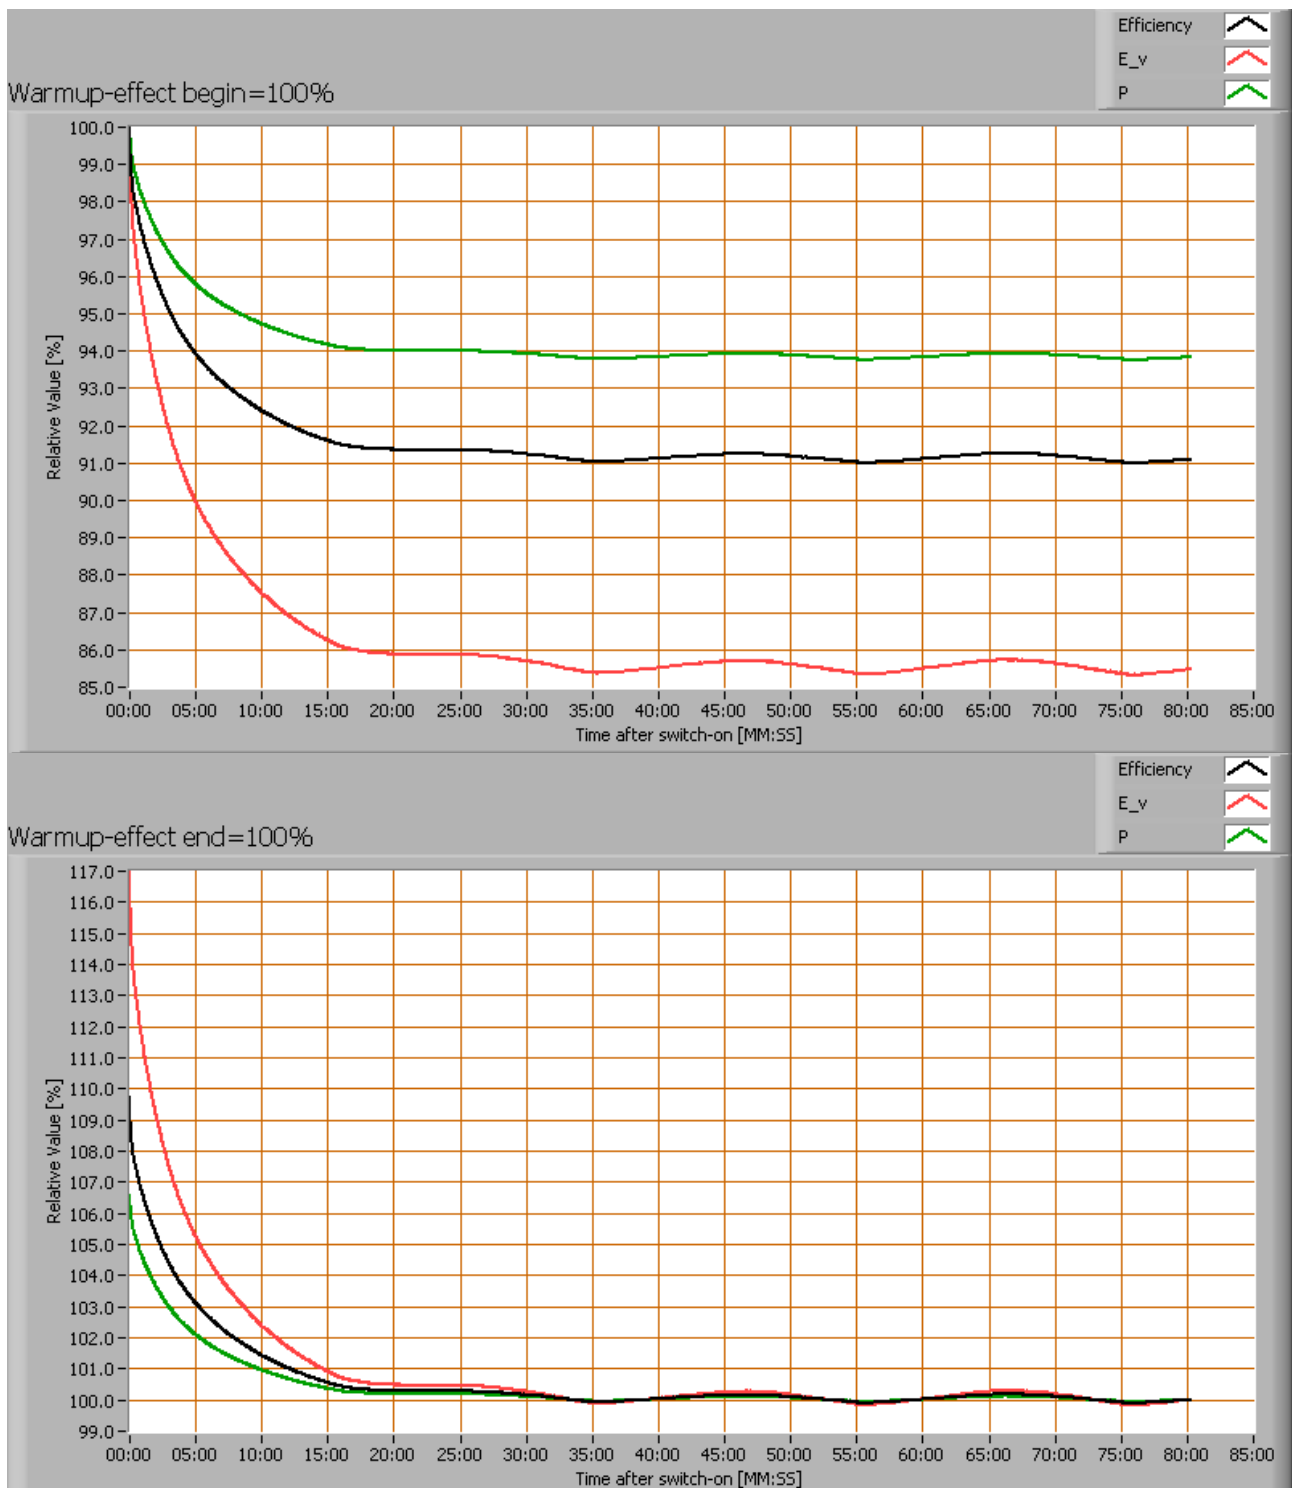


Effect of warming up on different light bulb parameters. The 100 % level is put at the beginning.

Lamp measurement report – 21 Dec 2010

The warm up time is about 15 minutes during which the illuminance decreases 14 % and the consumed power increased with about 6 %.

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the OliNo site for more information.

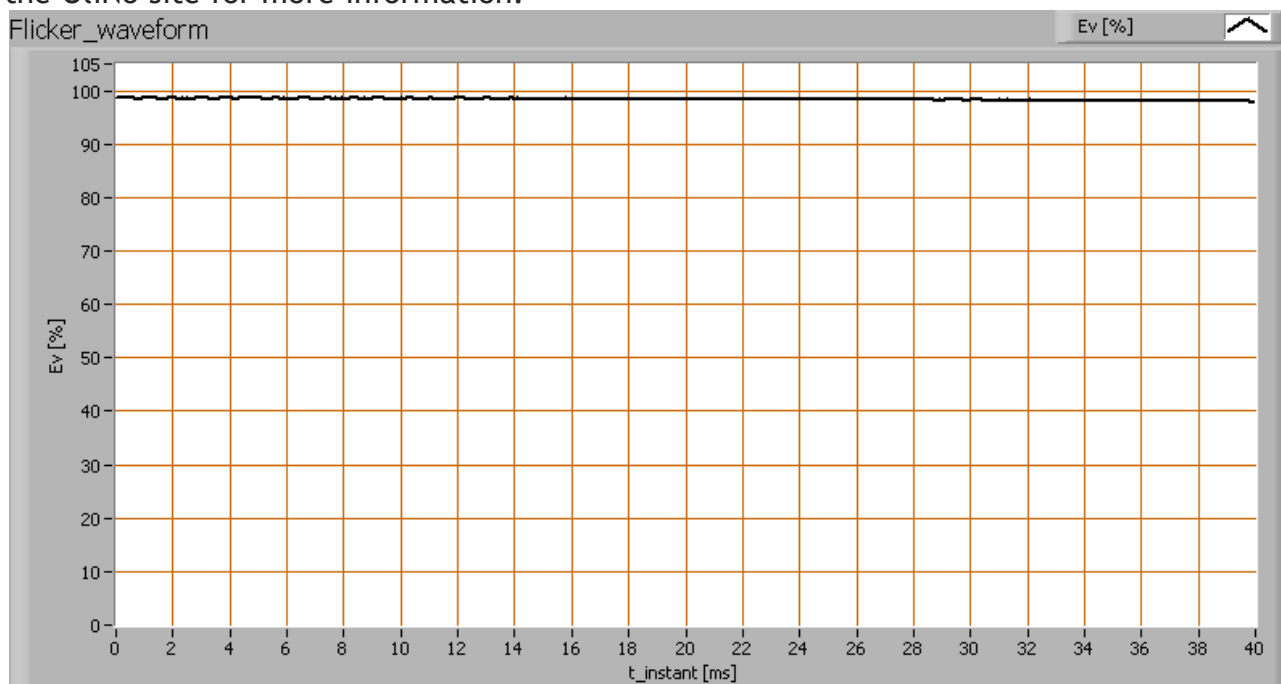

The measure of fast illuminance variation of the light of the light bulb

parameter	value	unit
Flicker frequency	39	Hz
Illuminance modulation index	0	%

The illuminance modulation index is computed as: $(\max_Ev - \min_Ev) / (\max_Ev + \min_Ev)$.

Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information



Lamp measurement report – 21 Dec 2010

could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

License

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly probited to change or alter parts of the report and/or republish it in a modified content.