

Lamp measurement report – 4 April 2011

Led module KLV-AOBEAM-RGB-test

by

KLV Ledverlichting

Photo courtesy by www.OliNo.org



Lamp measurement report – 4 April 2011

Summary measurement data


| parameter | meas. result | remark |
|----------------------------------|-------------------------------|--|
| <u>Color temperature</u> | 7453 K | very cold white |
| Luminous intensity I_v | 2909.8 Cd | Measured straight underneath the lamp. |
| Illuminance modulation index | 0 % | Measured with a light sensor looking at the lamp (angle not defined). Is a measure for the amount of flickering. |
| Beam angle | 28 deg | 28 deg is the beam angle for the C0-C180-plane (perpendicular to the length direction of the lamp) and 26 deg is the beam angle for the C90-C270 plane, which is along the length direction of the lamp. |
| Power P | 33.3 W | Follow the link for more information on electrical properties. |
| Power Factor | 0.73 | An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 0.93 kVAhr for reactive energy. |
| THD | 17 % | Total Harmonic Distortion. |
| Luminous flux | 776 lm | |
| Luminous efficacy | 23 lm/W | |
| EU-label classification | B | The energy class, from A (more efficient) to G (least efficient). |
| CRI_Ra | 30 | Color Rendering Index. |
| Coordinates chromaticity diagram | x=0.2998 en y=0.3255 | |
| Fitting | 230V | This lamp is connected via an external power and driving unit to the grid voltage. |
| PAR-value | 37.6 $\mu\text{Mol/s/m}^2$ | The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb. |
| | | |

Lamp measurement report – 4 April 2011

| | | |
|-------------------------------|---------------------------|--|
| PAR-photon efficacy | 0.3 $\mu\text{Mol/s/W}_e$ | The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons. |
| S/P ratio | 3.2 | This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level). |
| L x W x H external dimensions | 300 mm x 85 mm x 85 mm | External dimensions of the lamp. |
| L x W luminous area | 269 mm x 47 mm | Dimensions of the luminous area (used in Eulumdat file). It is the surface of the glass plate in front of the leds. |
| General remarks | | <p>The ambient temperature during the whole set of illuminance measurements was 23.2 - 24.5 deg C.</p> <p>The temperature of the housing gets maximally about 14 degrees hotter than ambient temperature.</p> <p>Warm up effect: During the warmup time the illuminance varies during 50 minutes and decreases with 6 %. During the warmup time the power doesn't vary significantly (< 5 %).</p> <p>Voltage dependency: There is no (significant) dependency of the illuminance when the power voltage varies between 200 - 250 V AC. There is no (significant) dependency of the consumed power when the power voltage varies between 200 - 250 V AC.</p> <p>At the end of the article an additional photo.</p> |
| | | |

Lamp measurement report – 4 April 2011

Overview table

| m. | Ø 50% | | CO-180: 28° C90-270: 26°  | E (lux) | Luminaire Efficacy |
|------|--------|---------|--|---------|------------------------------------|
| | CO-180 | C90-270 | | | 23 (lumen per Watt) |
| 0.25 | 0.12 | 0.12 | | 46557 | Half-peak diam CO-180 |
| 0.5 | 0.25 | 0.23 | | 11639 | 0.5 x diameter(m) |
| 1 | 0.5 | 0.47 | | 2910 | Half-peak diam C90-270 |
| 1.5 | 0.74 | 0.7 | | 1293 | 0.47 x diameter(m) |
| 3 | 1.49 | 1.41 | | 323 | Illuminance |
| 4 | 1.99 | 1.87 | | 182 | 2910 / distance ² (lux) |
| 5 | 2.48 | 2.34 | | 116 | Total Output |
| | | | | | 776 (lumen) |


The overview table is explained on the OLiNo website.

Please note that this overview table makes use of calculations, use this data with care as explained on the OLiNo site. E (lux) values are not accurate, when within 5 x 273 mm (maximal luminous size, eventually diagonally measured)= 1365 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.


EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy efficacy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OLiNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain. Herewith the labels for this lamp in color and black and white.

Lamp measurement report – 4 April 2011

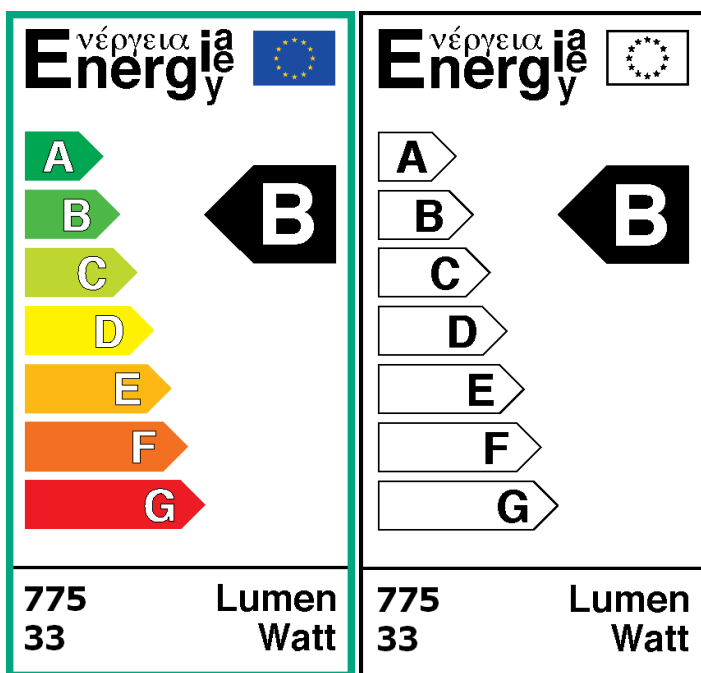

EU energy label of this lamp

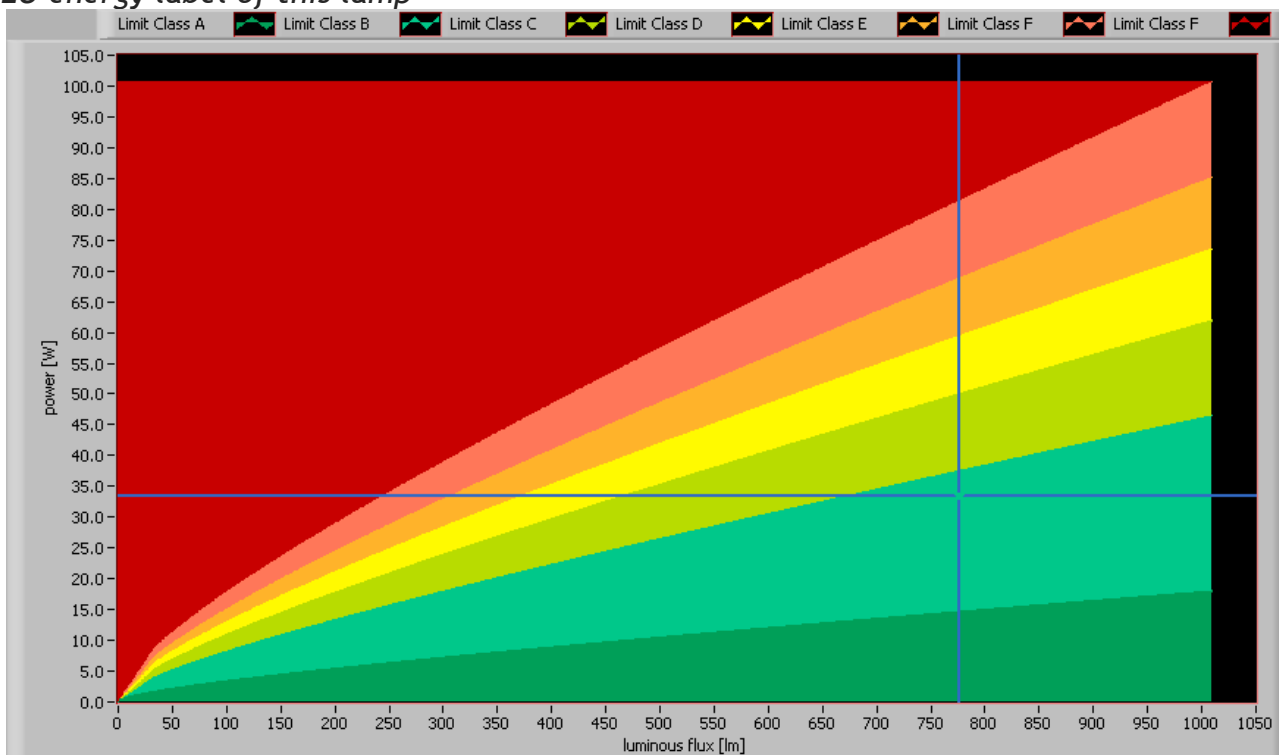


The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.

Lamp measurement report – 4 April 2011

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. This light diagram is explained on the OliNo site.

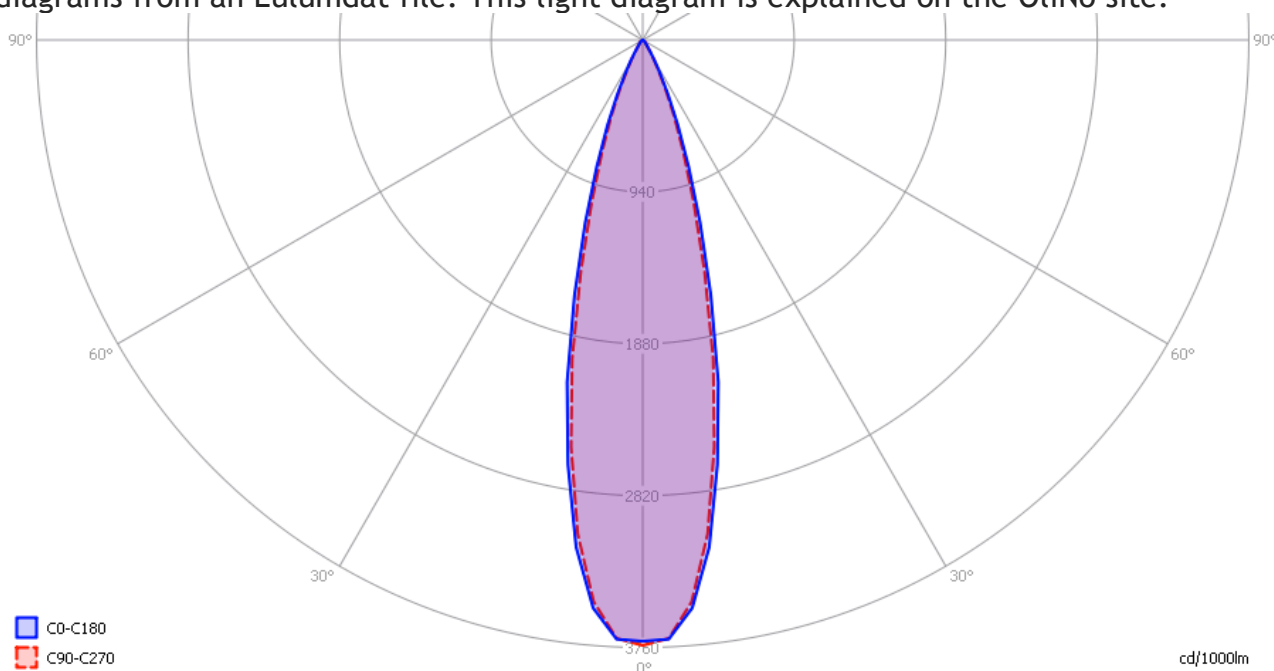


The light diagram giving the radiation pattern.

The light diagram indicates the beam in the C0-C180 plane (perpendicular to the length direction of the lamp) and in the plane perpendicular to that, the C90-C270 plane (along the length direction of the lamp).

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.


Lamp measurement report – 4 April 2011

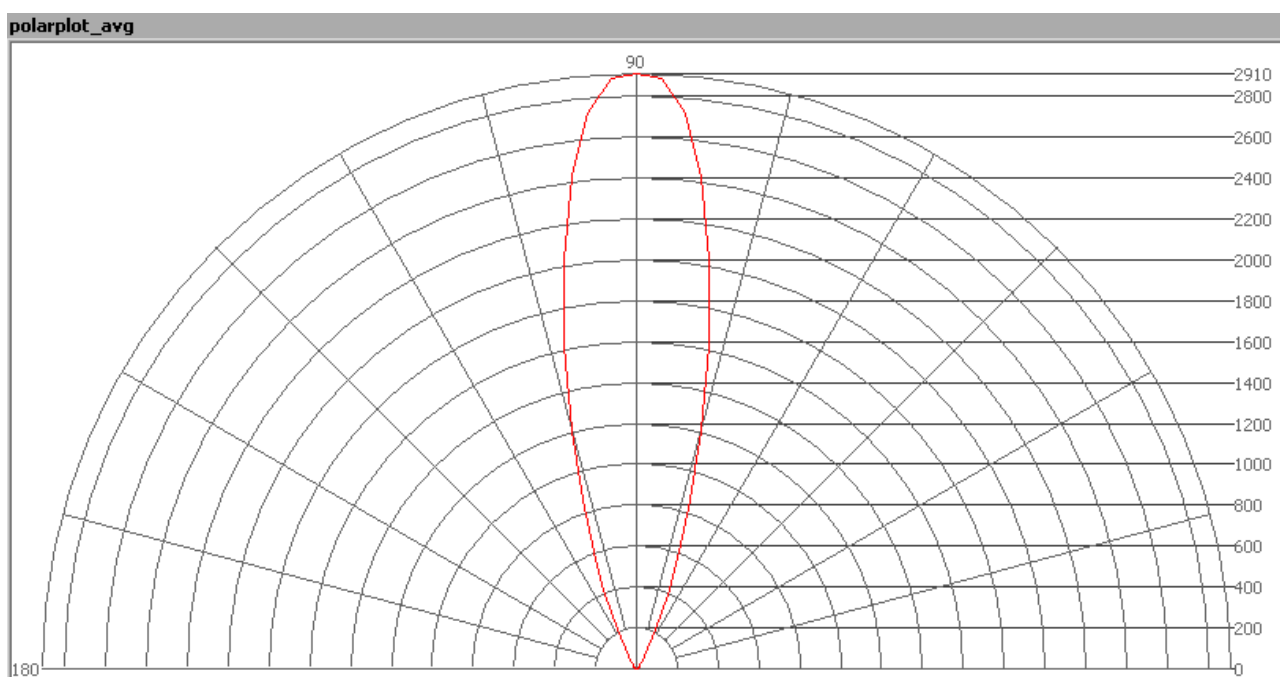

The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

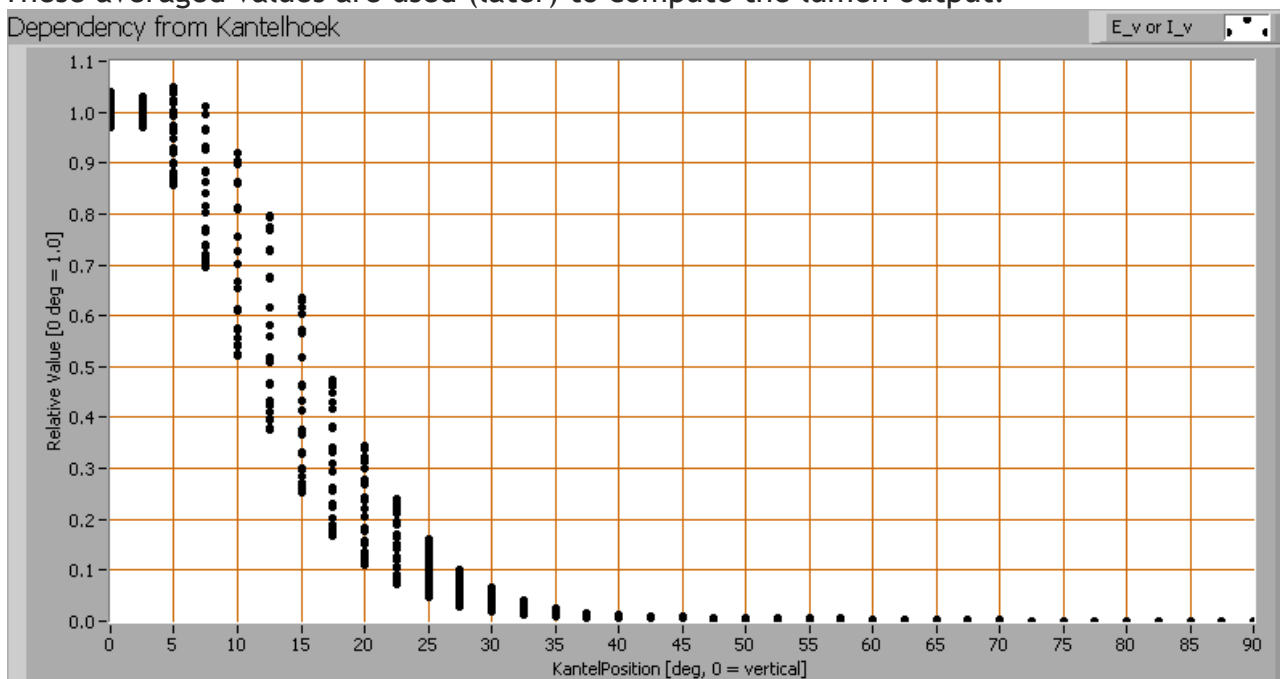

Intensity data of every measured turn angle at each inclination angle.



Lamp measurement report – 4 April 2011

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 28 deg for the C0-C180 plane and 26 deg for the C90-C270 plane.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 776 lm.

Luminous efficacy

The luminous flux being 776 lm, and the consumed power of the lamp being 33.3 Watt, results in a luminous efficacy of 23 lm/Watt.


Electrical properties

The power factor is 0.73. An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 0.93 kVAhr for reactive energy.

| | |
|------------------|---------|
| Lamp voltage | 230.0 V |
| Lamp current | 0.198 A |
| Power P | 33.3 W |
| Apparent power S | 45.5 VA |
| Power factor | 0.73 |

Of this lamp the voltage across and the resulting current through it are measured and graphed. See the UI acquisition on the OLiNo site how this is obtained.


Lamp measurement report – 4 April 2011

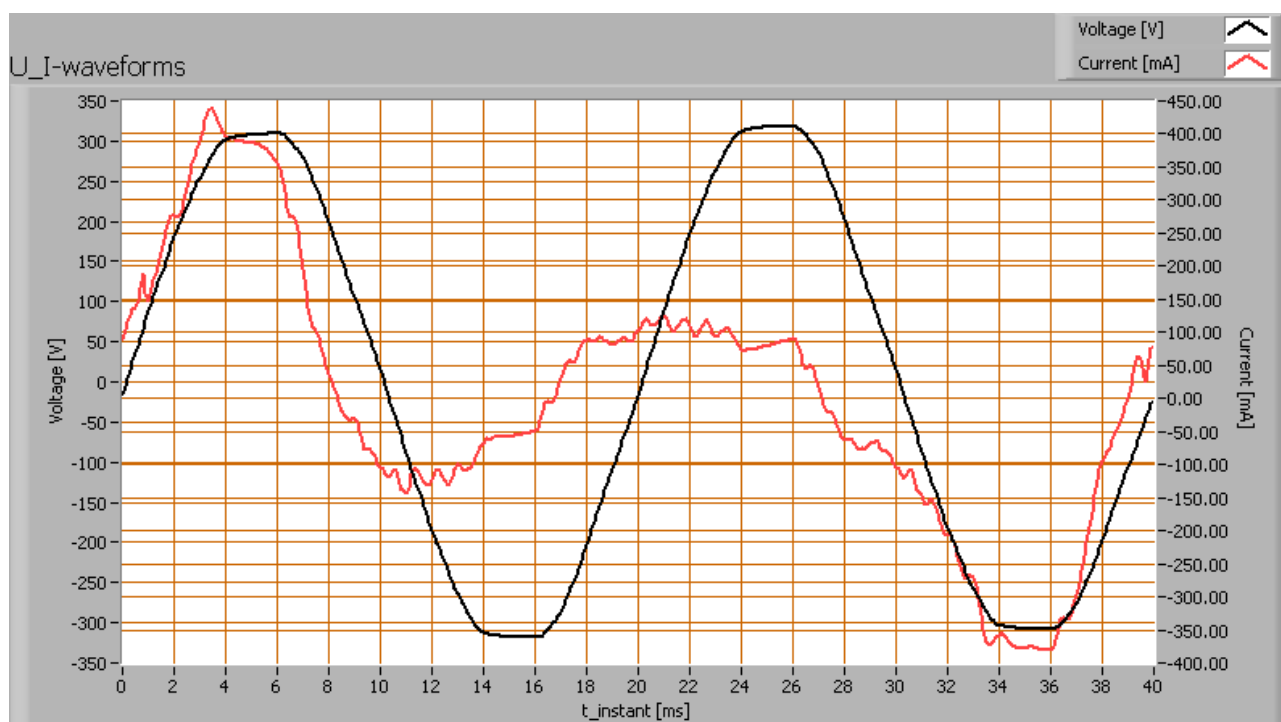

Voltage across and current through the lightbulb

This current waveform has been checked on requirements posed by the norm IEC 61000-3-2:2006 (including up to A2:2009). See also the IEC 61000-3-2:2006 explanation on the OLiNo website.

Lamp measurement report – 4 April 2011

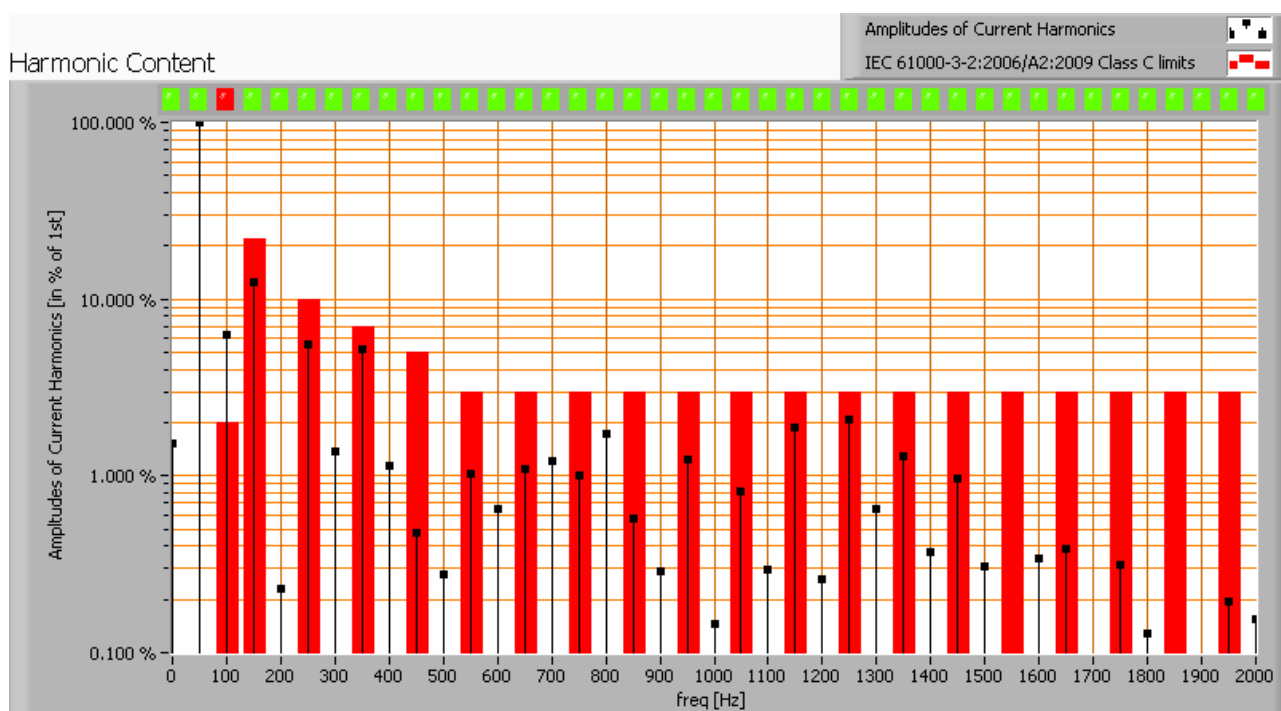


Harmonics in the current waveform and checked against IEC61000-3-2:2006 and A2:2009

When the consumed power is > 25 W there are limits for the harmonics and those are not respected. See the note for additional explication.

The Total Harmonic Distortion of the current is computed and its value is 17 %.

Note: the used lampvoltage in this test is not clean enough to be able to well evaluate the results of the current harmonics according to this norm; this is because the used voltage has (a little) too much harmonic content itself, which results in worse results for the current harmonics. Herewith the image showing the harmonic content of the voltage used. It becomes clear that there are not many harmonics in the voltage applied so the result for the current compared with the norm must be seen then as a serious indication.


Lamp measurement report – 4 April 2011

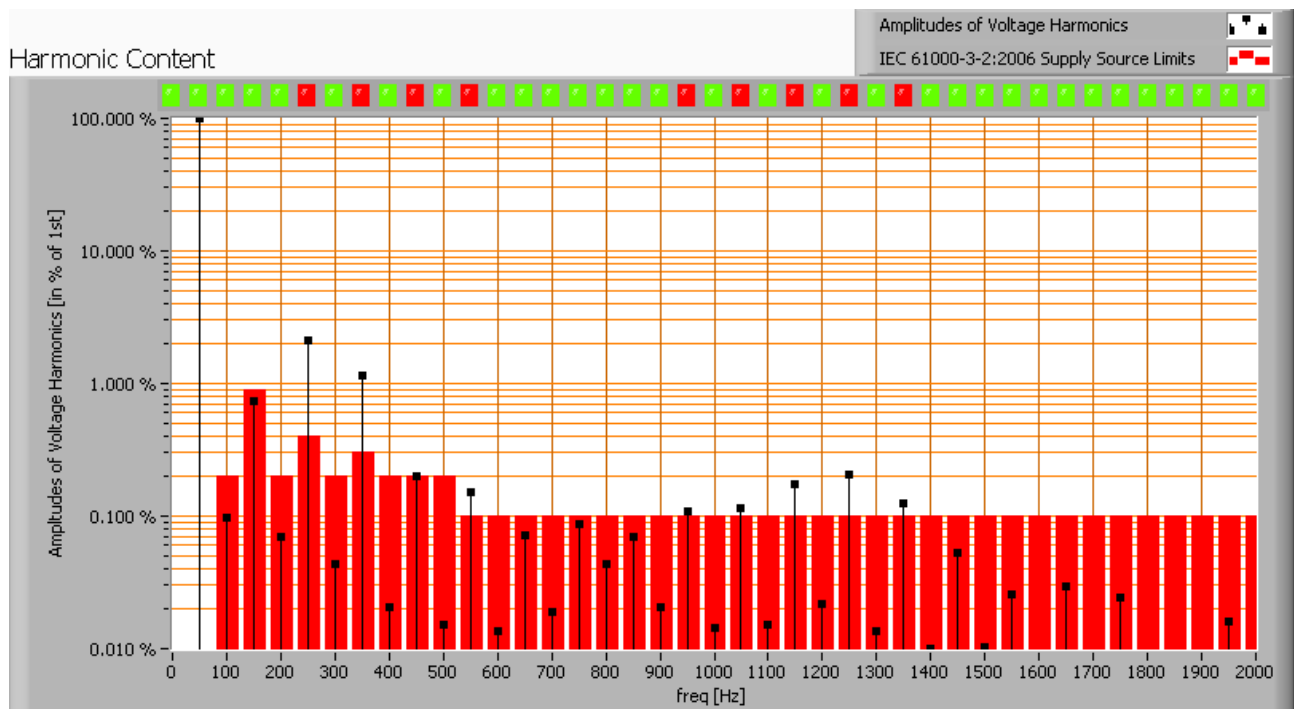

Harmonics in the voltage waveform and checked against IEC61000-3-2:2006 and A2:2009.

Lamp measurement report – 4 April 2011

Temperature measurements lamp

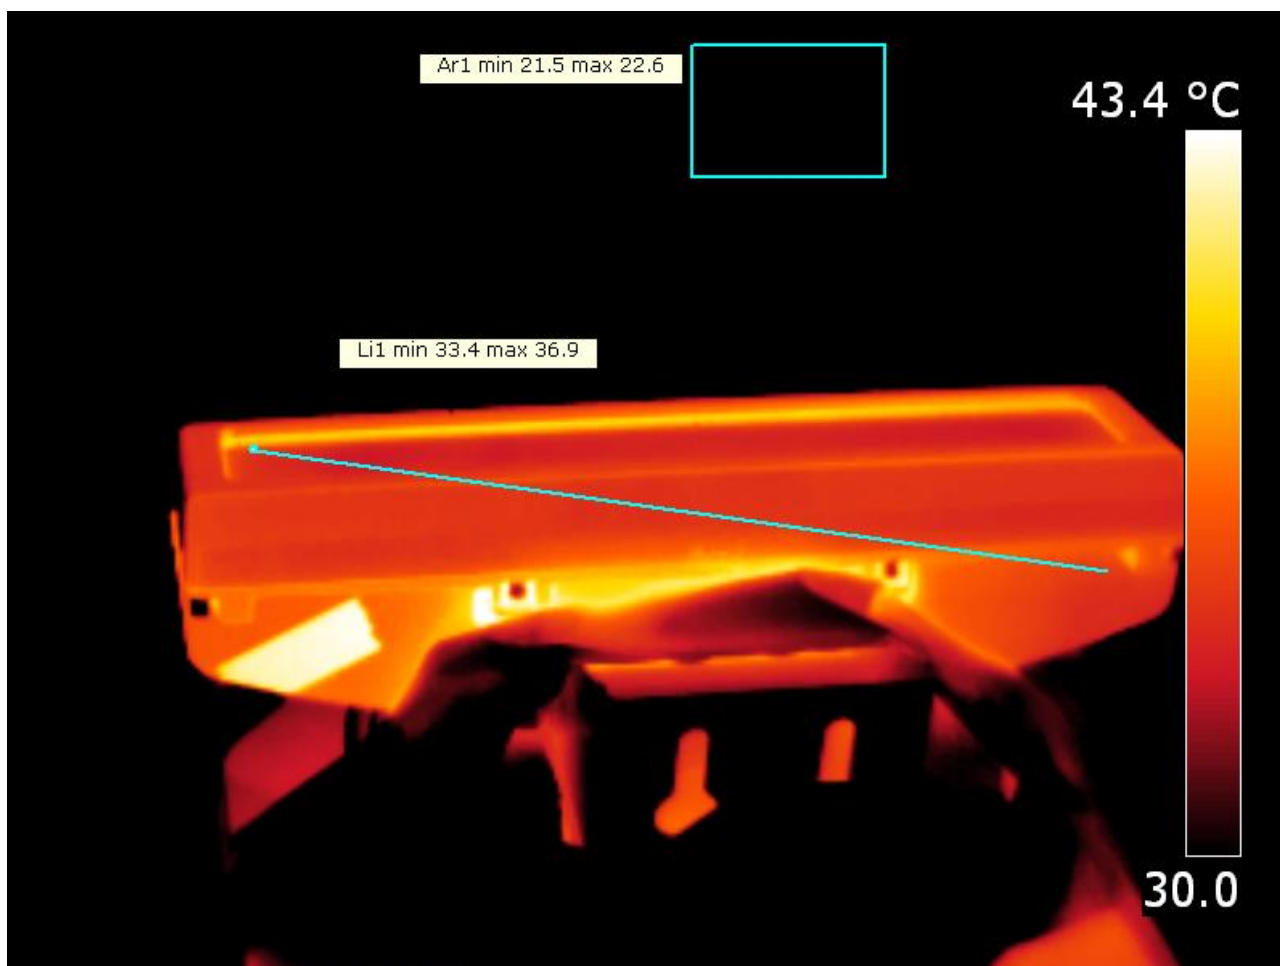


Temperature image. The emissivity of the alu material is about 0.68.

| | |
|----------------------------------|-----------------------------|
| status lamp | > 2 hours on |
| ambient temperature | 23.5 deg C |
| reflected background temperature | 23.5 deg C |
| camera | Flir T335 |
| emissivity | 0.68 |
| measurement distance | 1 m |
| IFOV _{geometric} | 0.136 mm per 0.1 m distance |
| NETD (thermal sensitivity) | 50 mK |

Lamp measurement report – 4 April 2011

Color temperature and Spectral power distribution

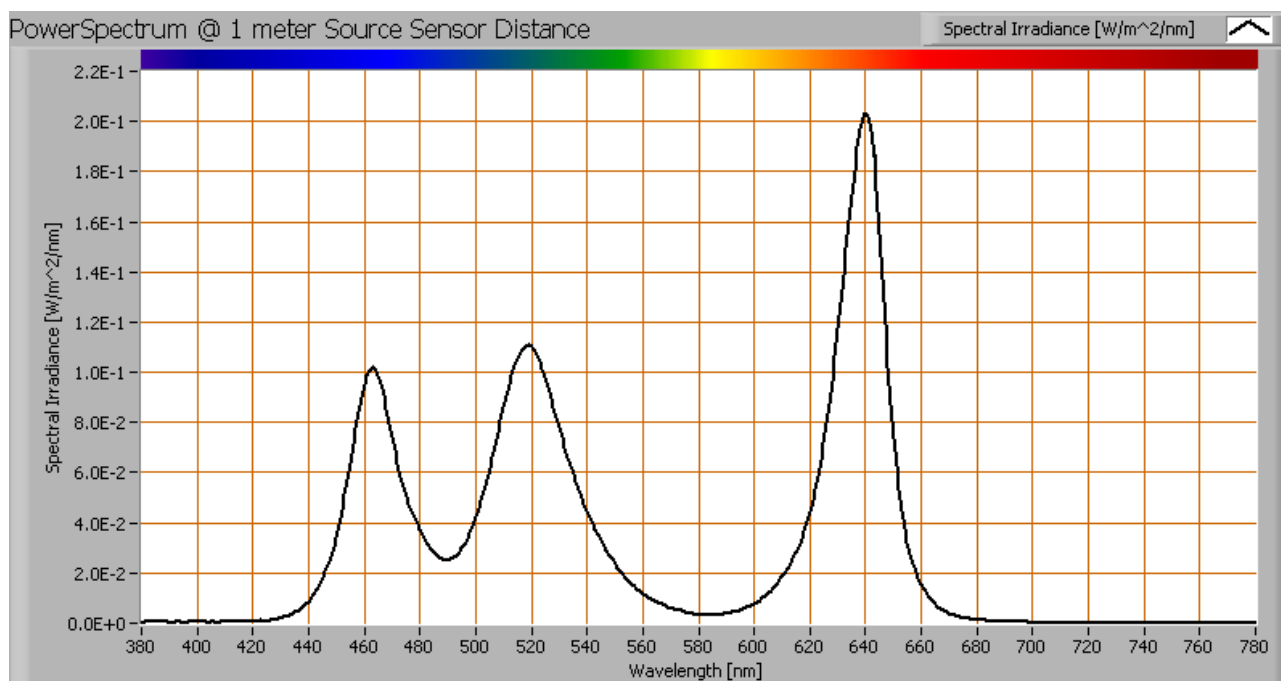


The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.

The measured color temperature is 7453 K which is very cold white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

Lamp measurement report – 4 April 2011

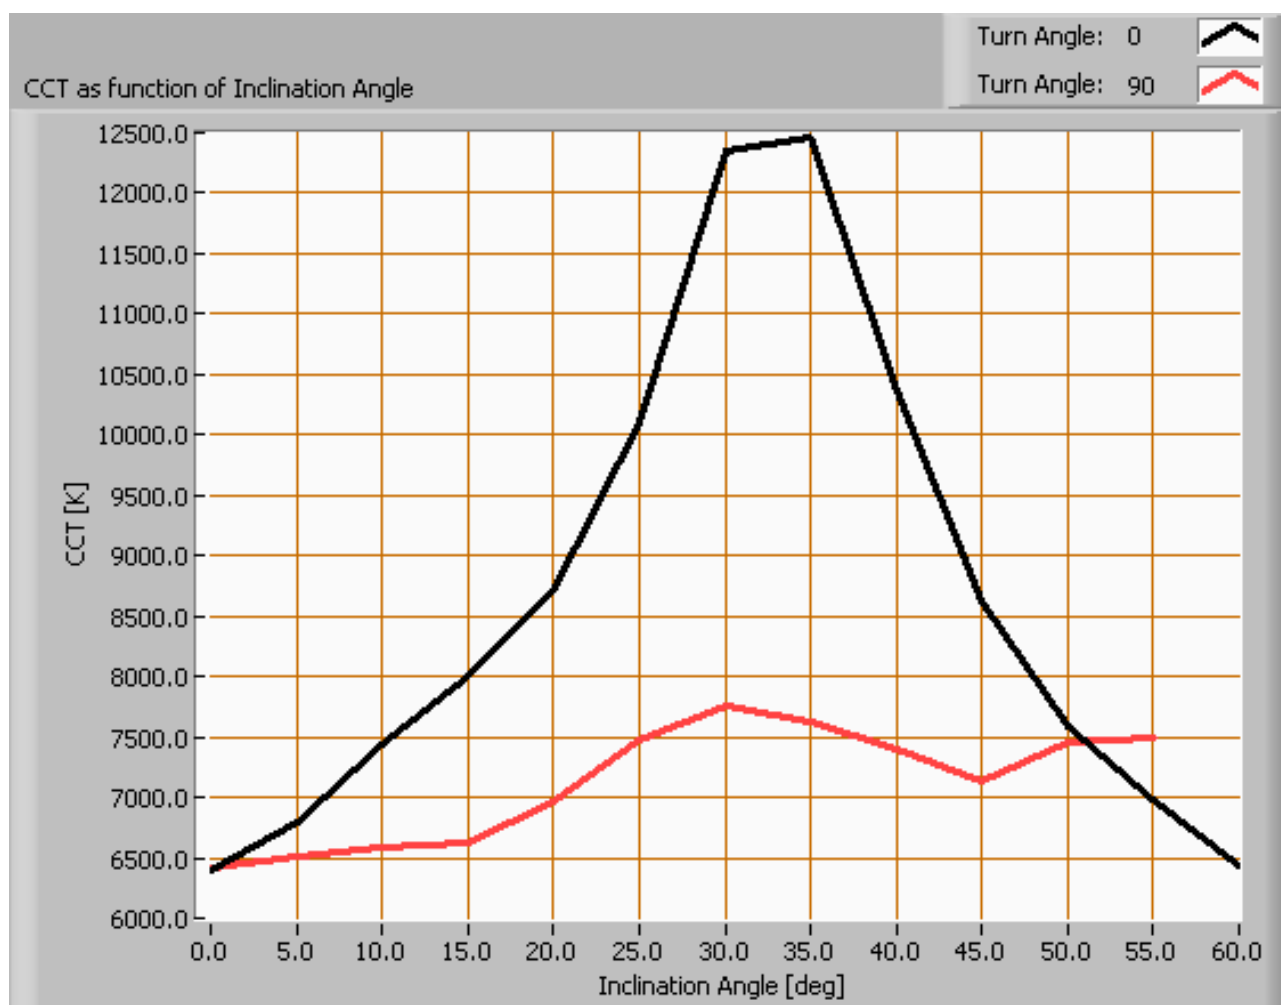

Color temperature as a function of inclination angle.

The color temperature is given for inclination angles up to 55 deg. Beyond that value the illuminance is so low (< 5 lux) that it has not been used for color determination of the light.


For the C0-C180 plane: the beam angle of 28 deg is equivalent to 13.9 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 3 %.

For the C90-C270 plane: the beam angle of 26 deg is equivalent to 13.2 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 22 %.

Lamp measurement report – 4 April 2011

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the explanation about PAR on the OLiNo website how this all is determined and the explanation of the graph.

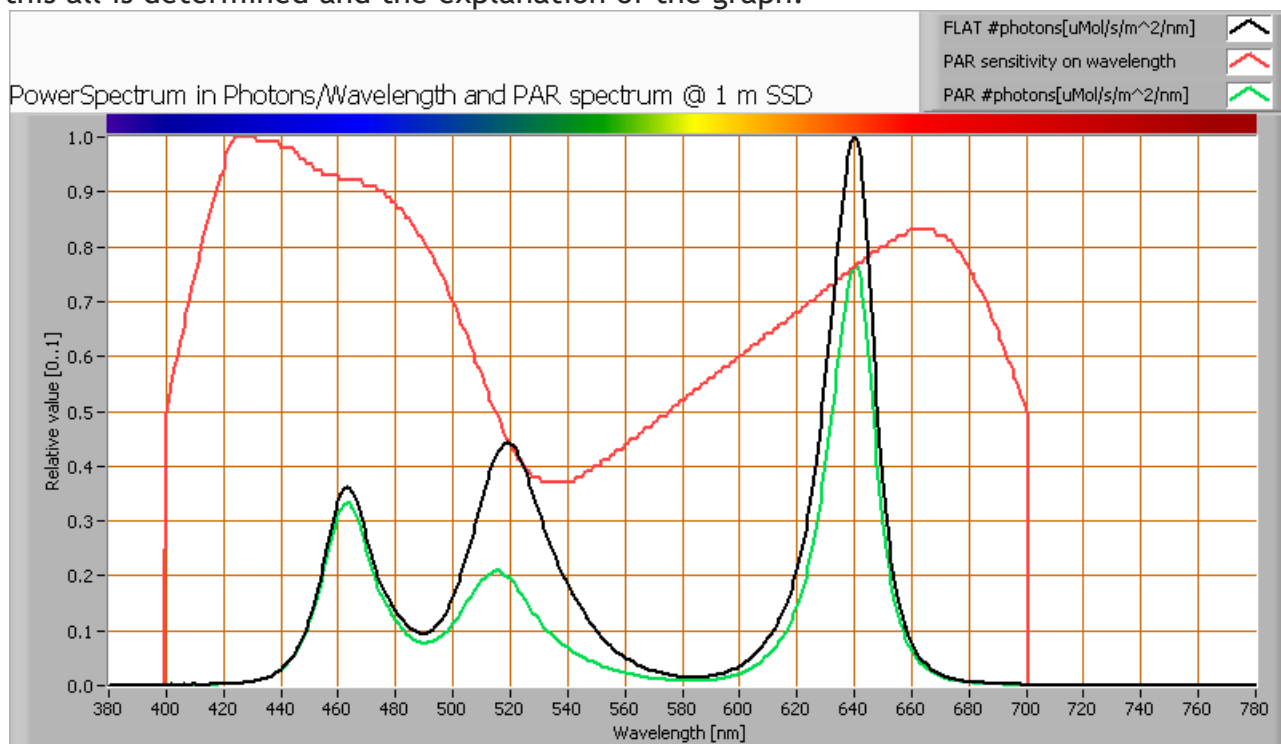

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb


| parameter | value | unit |
|---------------------|-------|-----------------------|
| PAR-number | 37.6 | $\mu\text{Mol/s/m}^2$ |
| PAR-photon current | 10.0 | $\mu\text{Mol/s}$ |
| PAR-photon efficacy | 0.3 | $\mu\text{Mol/s/W}$ |

The PAR efficiency is 69 % (valid for the PAR wave length range of 400 - 700 nm). This is the maximum percentage of the total of photons in the light that is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

Lamp measurement report – 4 April 2011

S/P ratio

The S/P ratio and measurement is explained on the OLiNo website. Here the results are given.

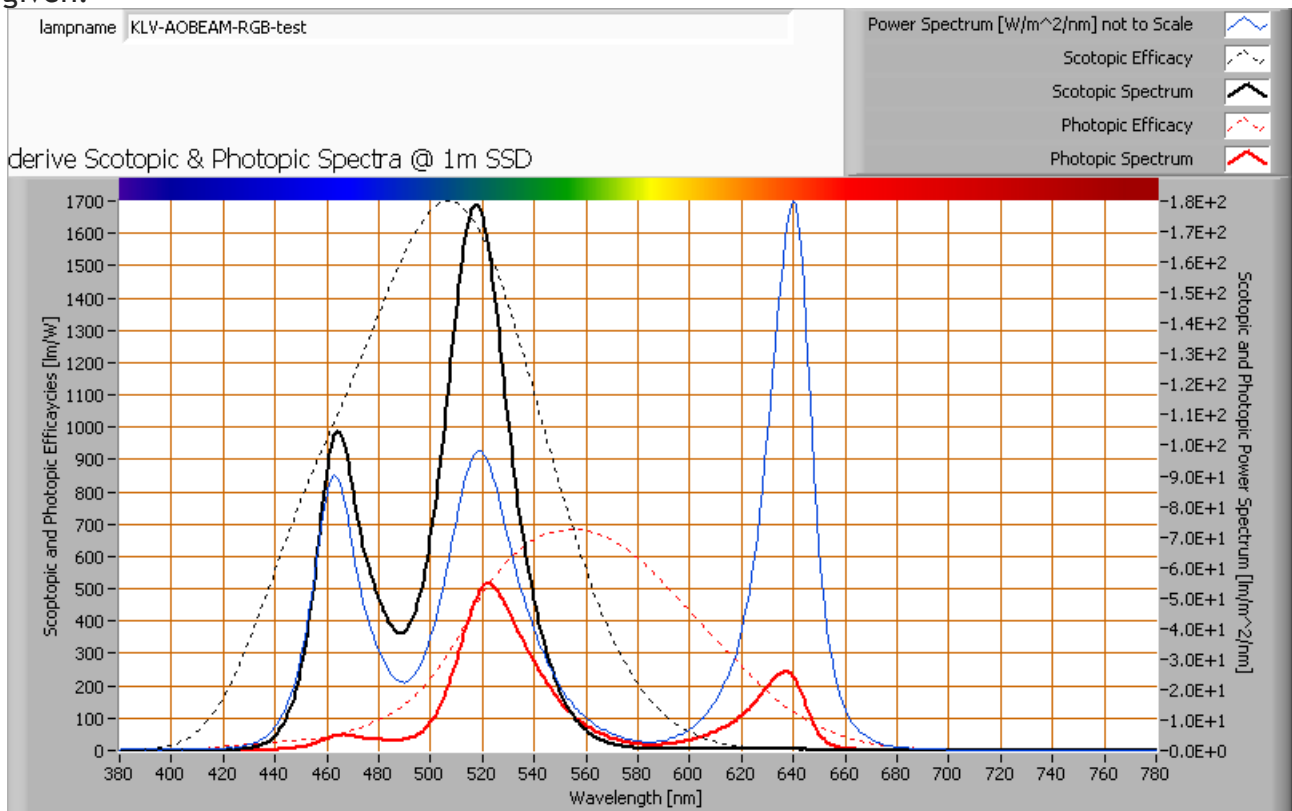


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio of the light coming from this lamp is 3.2.
More info on S/P ratio can be found on the OLiNo website.

Lamp measurement report – 4 April 2011

Chromaticity diagram

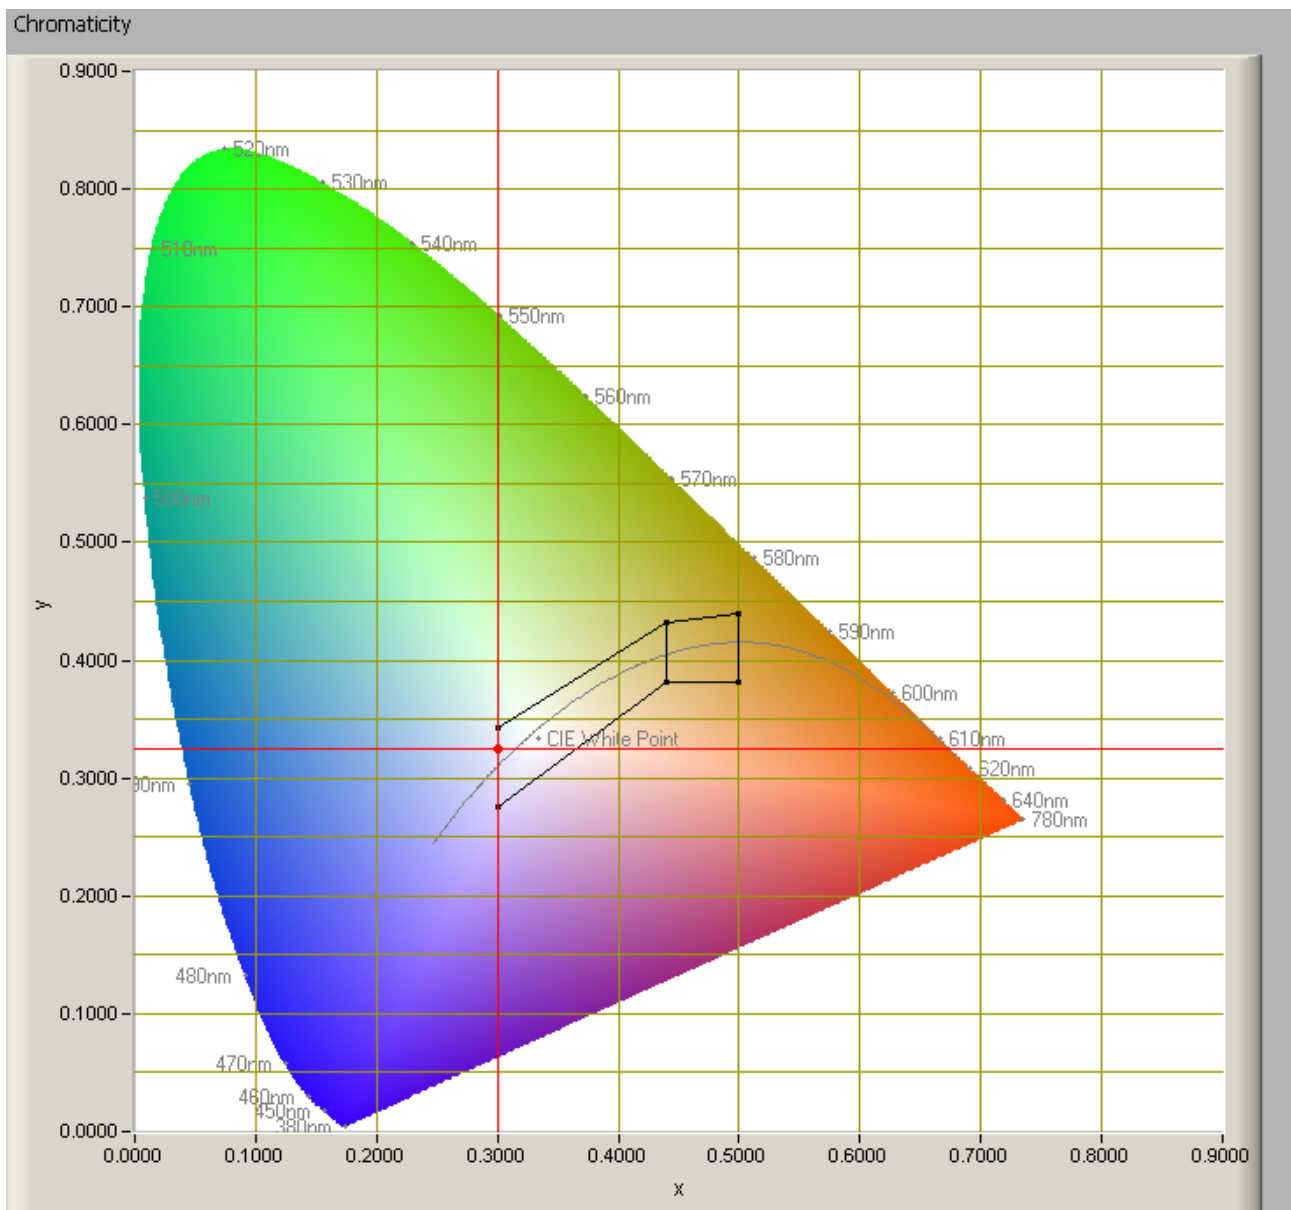

The chromaticity space and the position of the lamp's color coordinates in it.

The point of the light in this diagram is at the border of the area indicated with class A. This area indicates an area for signal lamps, see also the article on signal lamps and color areas on the OLiNo website.

The color coordinates are $x=0.2998$ and $y=0.3255$.

Lamp measurement report – 4 April 2011















Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OliNo website. Each color has an index R_x , and the first 8 indexes ($R_1 \dots R_8$) are averaged to compute the R_a which is equivalent to the CRI.

☐ manual

Reference Illuminant: Planckian radiator CCT: 7453 K

Chromaticity Difference DC= 8.3E-3

| | | | |
|----------|---|-------------|---|
| R1= 14 |  | R8= -49.7 |  |
| R2= 61.8 |  | R9= -2.7E+2 |  |
| R3= 67.9 |  | R10= 7.5 |  |
| R4= 22.2 |  | R11= 4.5 |  |
| R5= 32.3 |  | R12= 59.1 |  |
| R6= 53.5 |  | R13= 24.4 |  |
| R7= 41.1 |  | R14= 78 |  |

Ra
(mean value of $R_1 - R_8$)
30.4

CRI of the light of this lightbulb.

This value of 30 indicates how well the light of this lamp can render well a set of reference colors, this in comparison with the light of a reference source (for color temperatures $< 5000\text{K}$ a black radiator is used as reference and for color temperatures $> 5000\text{K}$ the sun or the light outside during the day).


The value of 30 is smaller than the value of 80 that is considered as a minimum for working areas in general.

Note: the chromaticity difference is 0.0083 and indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.

Lamp measurement report – 4 April 2011

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W] (this latter is estimated here by dividing the found E_v value by P).

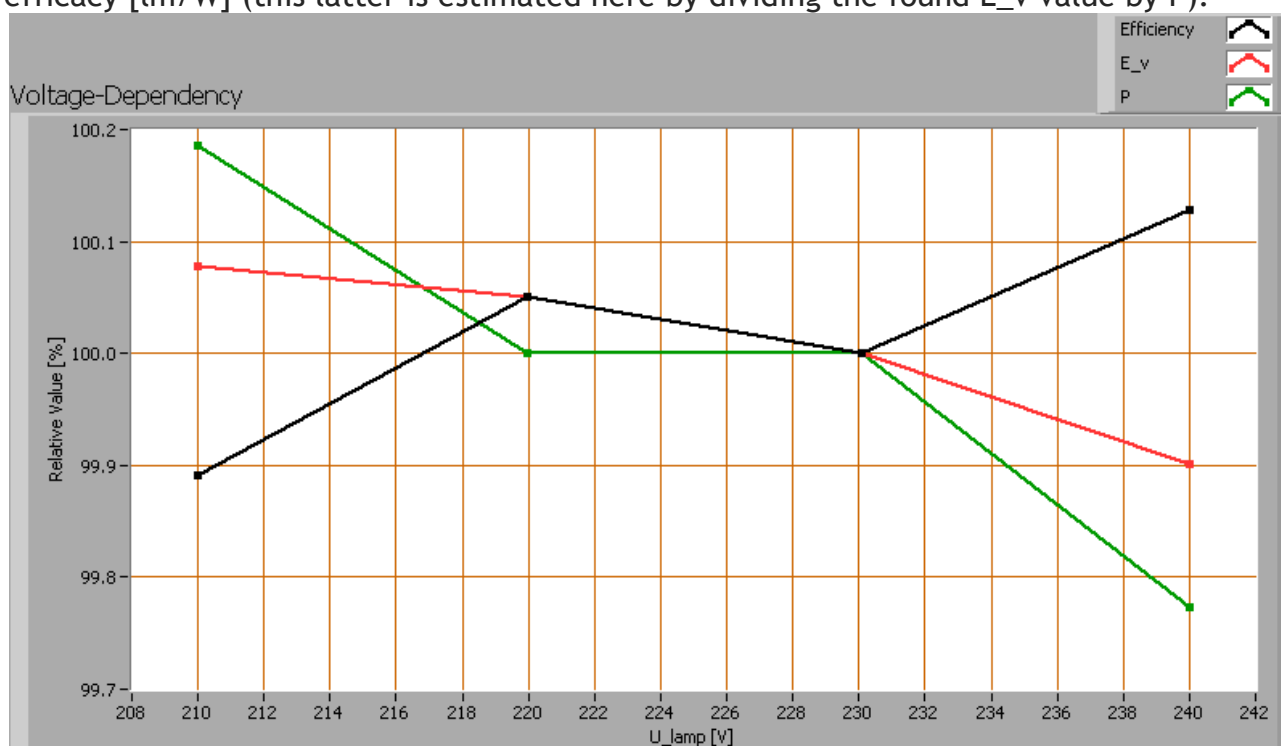

Lamp voltage dependencies of certain light bulb parameters


There is no (significant) dependency of the illuminance when the power voltage varies between 200 - 250 V AC. There is no (significant) dependency of the consumed power when the power voltage varies between 200 - 250 V AC.

When the voltage varies abruptly with + or - 5 V AC then this results in a variation of the illuminance of maximally 0.0 %. This difference in illuminance is not visible (when it occurs abruptly).

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

Lamp measurement report – 4 April 2011

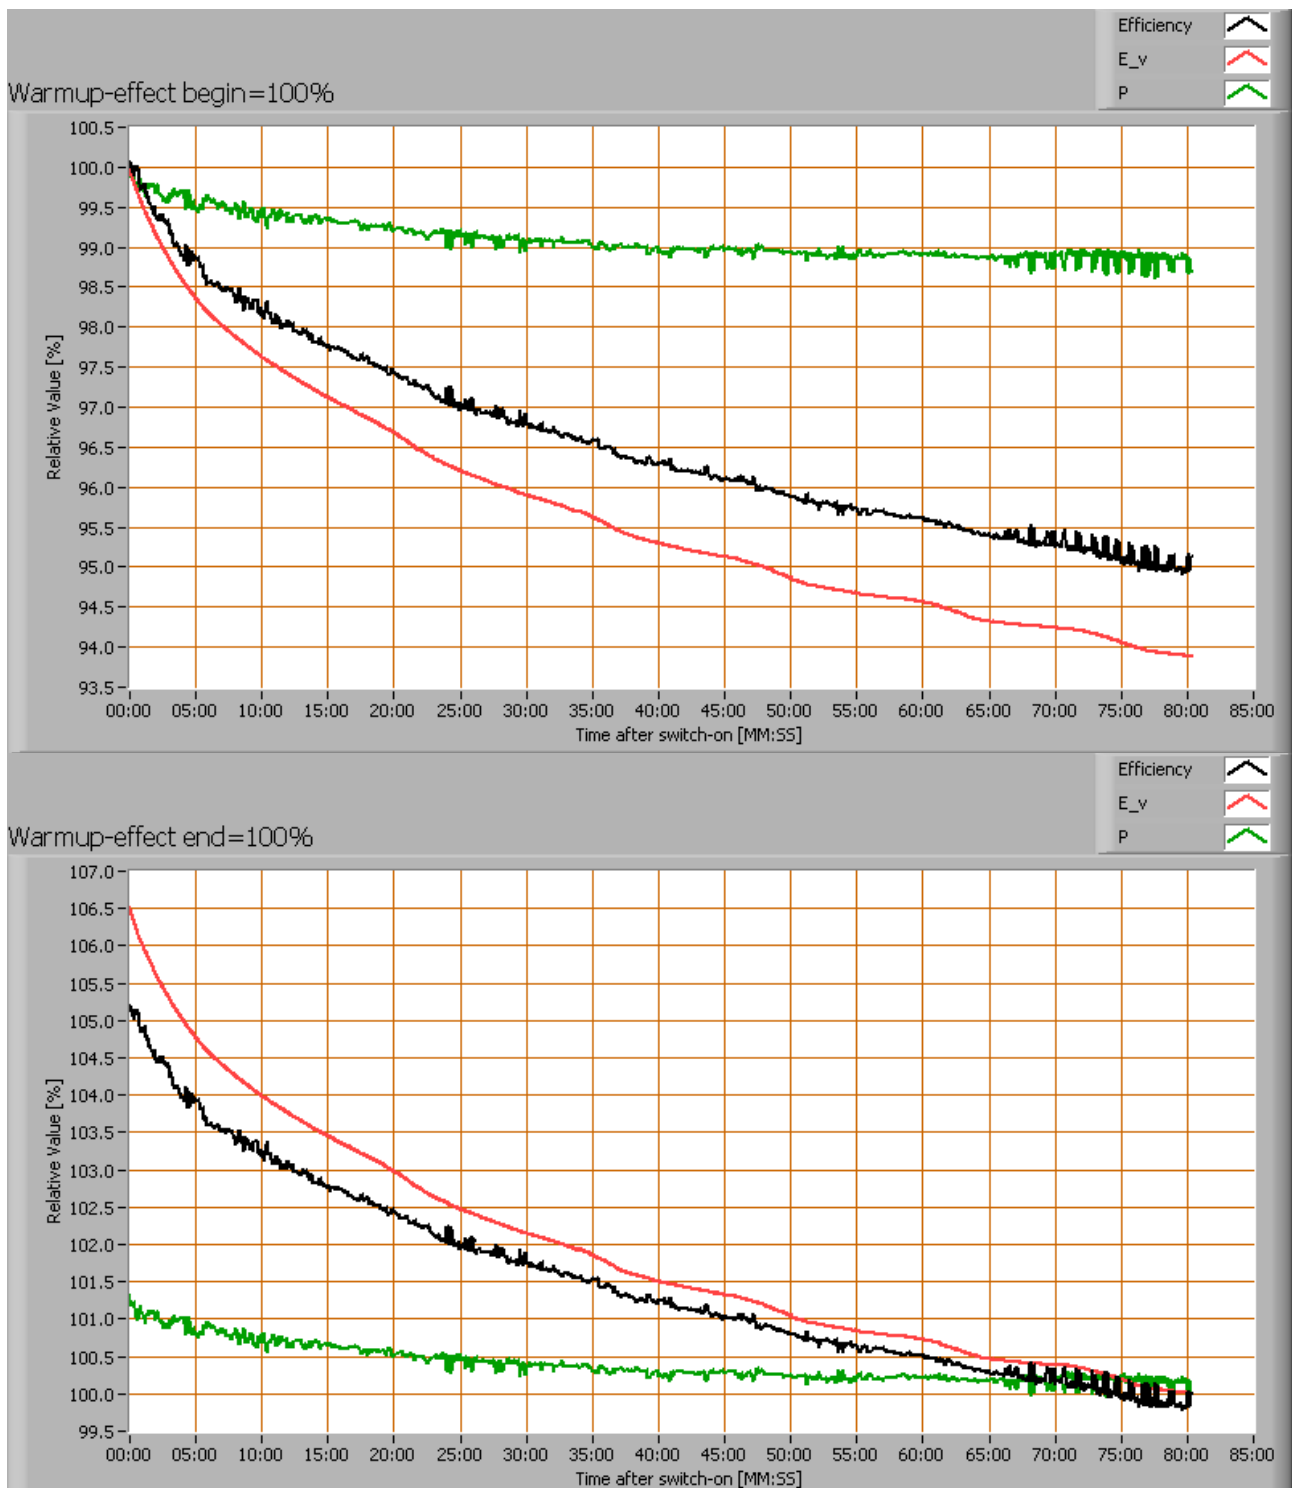


Effect of warming up on different light bulb parameters. In the first graph the 100 % level is put at begin, and in the last graph the 100 % level is put at the end.

Lamp measurement report – 4 April 2011

During the warmup time the illuminance varies during 50 minutes and decreases with 6 %. During the warmup time the power doesn't vary significantly (< 5 %).

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the article on flickering on OliNo site for more information.

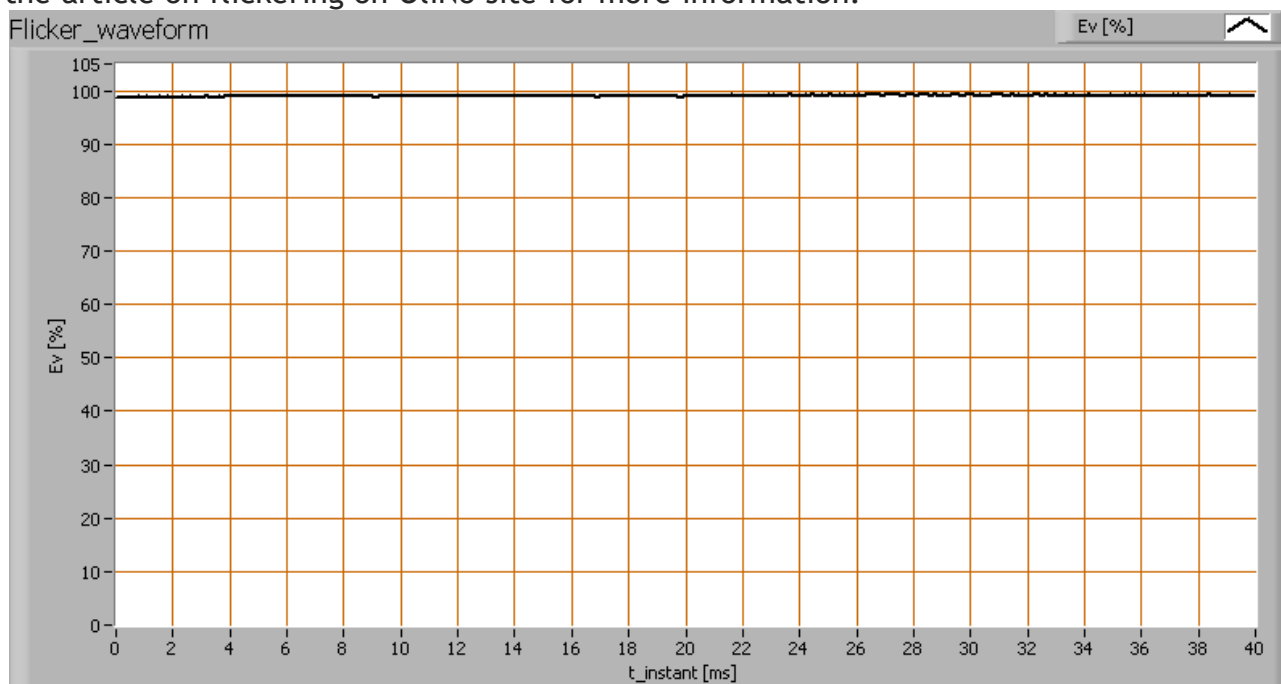

The measure of fast illuminance variation of the light of the light bulb

| parameter | value | unit |
|------------------------------|-------|------|
| Flicker frequency | 50.6 | Hz |
| Illuminance modulation index | 0 | % |

The illuminance modulation index is computed as: $(\max_Ev - \min_Ev) / (\max_Ev + \min_Ev)$.

Lamp measurement report – 4 April 2011

Extra



The driver for the lamp module.

Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

License

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it



Lamp measurement report – 4 April 2011

is strictly prohibited to change or alter parts of the report and/or republish it in a modified content.