


Lampmeetrapport - 14 jan 2012

1m Ledvalonauha Lammin 9.6Wm-1 12V DC ledstrip
door
Proled

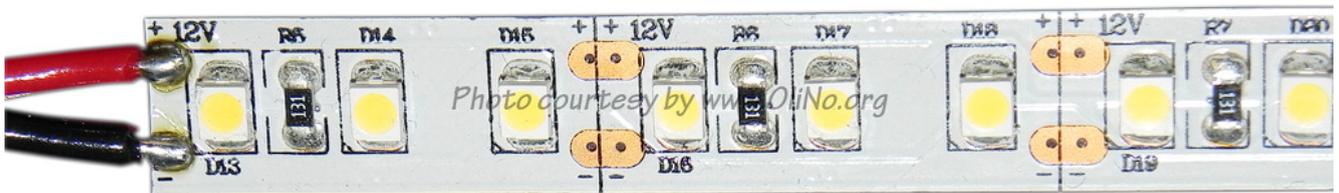

Lampmeetrapport - 14 jan 2012

Summary measurement data


parameter	meas. result	remark
Color temperature	3200 K	warm white (close to neutral white)
Luminous intensity I _v	230.9 Cd	Measured straight underneath the lamp.
Illuminance modulation index	0 %	Measured with a light sensor looking at the lamp (angle not defined). Is a measure for the amount of flickering.
Beam angle	118 deg	118 deg is the beam angle for the C0-C180-plane (perpendicular to the length direction of the lamp) and 118 deg is the beam angle for the C90-C270 plane, which is along the length direction of the lamp.
Power P	9.5 W	Follow the link for more information on electrical properties.
Power Factor	1.00	The tests were done with a DC power supply. This results in no blind power and as a result the power factor is always 1.0 but not relevant to mention.
THD	NaN %	Total Harmonic Distortion, is not present as a DC voltage was used to power the lamp so a DC current resulted which has no THD.
Luminous flux	699 lm	
Luminous efficacy	74 lm/W	Be aware that a DC power supply has been used. The found efficacy with this measurement is excluding the power supply that normally is needed to convert the grid voltage (230 V AC) to the used DC voltage. By excluding the consumption of the power supply the efficacy found here is higher than it would be when the power supply had been included.
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI _{Ra}	64	Color Rendering Index.
Coordinates chromaticity diagram	x=0.4269 en y=0.4076	
Fitting	12V klemmen	Deze lamp heeft 12V DC nodig.
PAR-value	1.9 uMol/s/m ²	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.
PAR-photon efficacy	0.6 uMol/s/W _e	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.

Lampmeetrapport - 14 jan 2012

parameter	meas. result	remark
S/P ratio	1.2	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
L x W x H external dimensions	990 mm x 8 mm x 3 mm	External dimensions of the lamp.
L x W luminous area	984 mm x 3 mm	Afmetingen van het gebied waar het licht vandaan komt. Het is de afmeting van de strip waarop de leds zitten. Deze parameters worden in een Eulumdatfile gebruikt.
General remarks		<p>The ambient temperature during the whole set of illuminance measurements was 25.3 - 26.4 deg C.</p> <p>The temperature of the housing gets maximally about 25 degrees hotter than ambient temperature.</p> <p>Warm up effect: During the warmup time the illuminance doesn't vary significantly (< 5 %).</p> <p>During the warmup time the power doesn't vary significantly (< 5 %).</p> <p>Voltage dependency: There is a constant dependency of the illuminance when the power voltage varies between 10 - 14 V DC. There is a constant dependency of the consumed power when the power voltage varies between 10 - 14 V DC.</p> <p>At the end of the article an additional photo.</p>
Dimmable	no	Info from manufacturer.
Biologic effect factor	0.332	According to pre-norm DIN V 5031-100:2009-06.
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.
form factor	tube/strip	

Lampmeetrapport - 14 jan 2012

Overview table

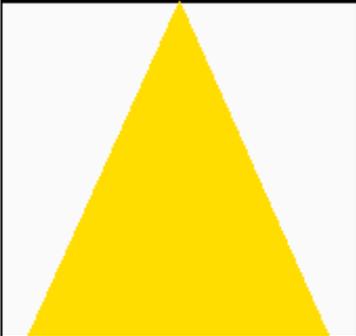m.	Ø 50%		C0-180: 118° C90-270: 118°	E (lux)	Luminaire Efficacy
	C0-180	C90-270			74 (lumen per Watt)
0.25	0.84	0.84		3694	Half-peak diam C0-180
0.5	1.68	1.67		923	3.35 x diameter(m)
1	3.35	3.35		231	Half-peak diam C90-270
1.5	5.03	5.02		103	3.35 x diameter(m)
3	10.05	10.04		26	Illuminance
4	13.4	13.39		14	231 / distance ² (lux)
5	16.76	16.73		9	Total Output
					699 (lumen)

The overview table is explained on the OliNo website.


Please note that this overview table makes use of calculations, use this data with care as explained on the OliNo site. E (lux) values are not accurate, when within 5 x 984 mm (maximal luminous size, eventually diagonally measured)= 4920 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.

Lampmeetrapport - 14 jan 2012


EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy efficacy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OLiNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain.

Herewith the labels for this lamp in color and black and white.

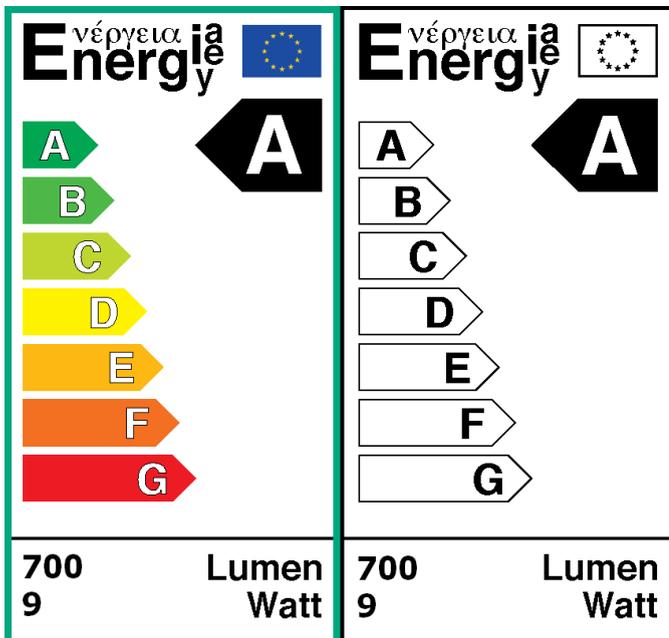

EU energy label of this lamp

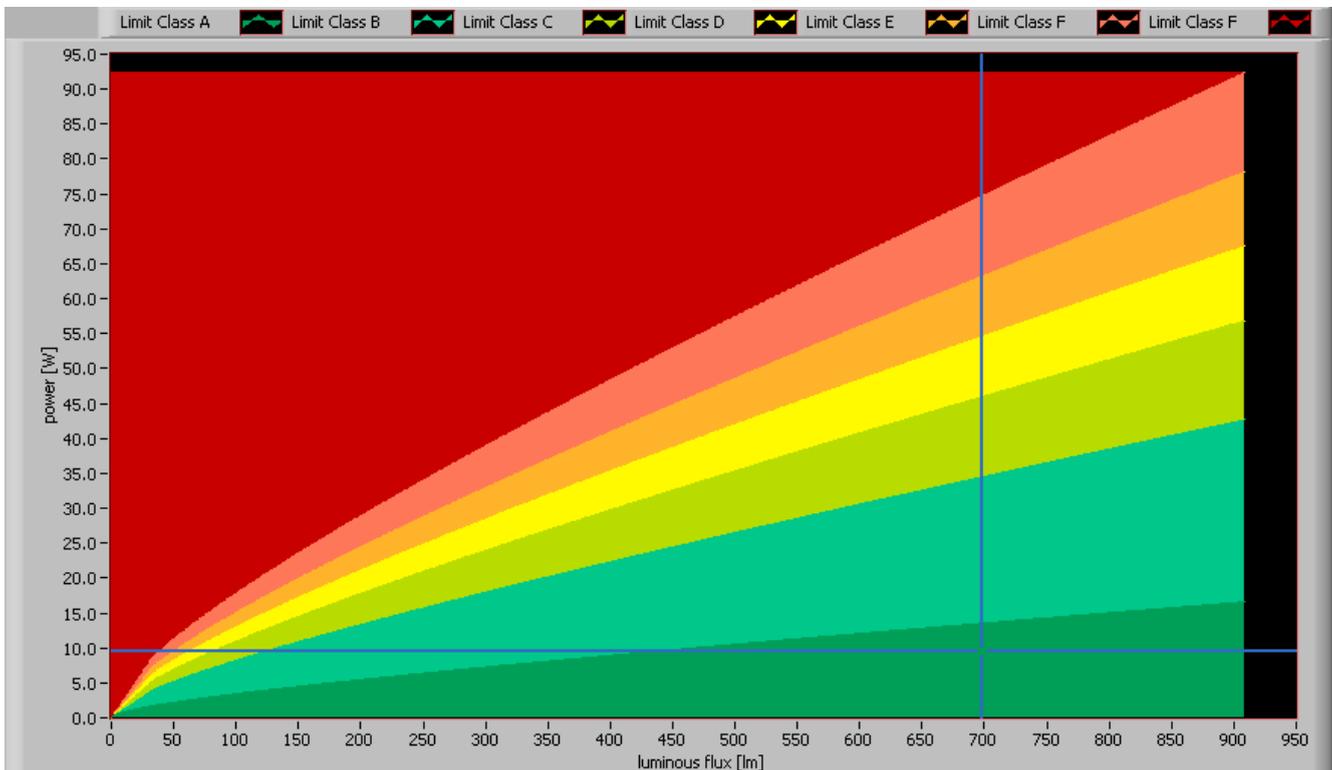


The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.

Lampmeetrapport - 14 jan 2012

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. This light diagram is explained on the OliNo site.

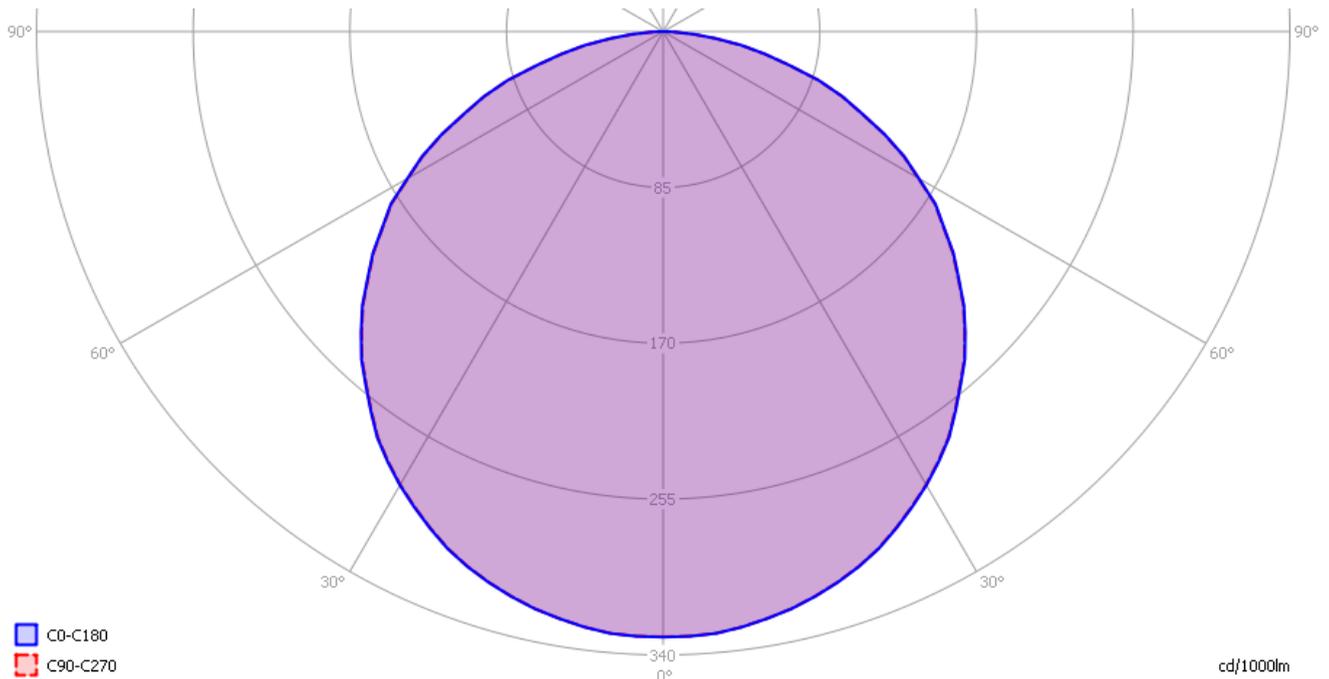


The light diagram giving the radiation pattern.

The light diagram indicates the beam in the C0-C180 plane (perpendicular to the length direction of the lamp) and in the plane perpendicular to that, the C90-C270 plane (along the length direction of the lamp).

Lampmeetrapport - 14 jan 2012

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.

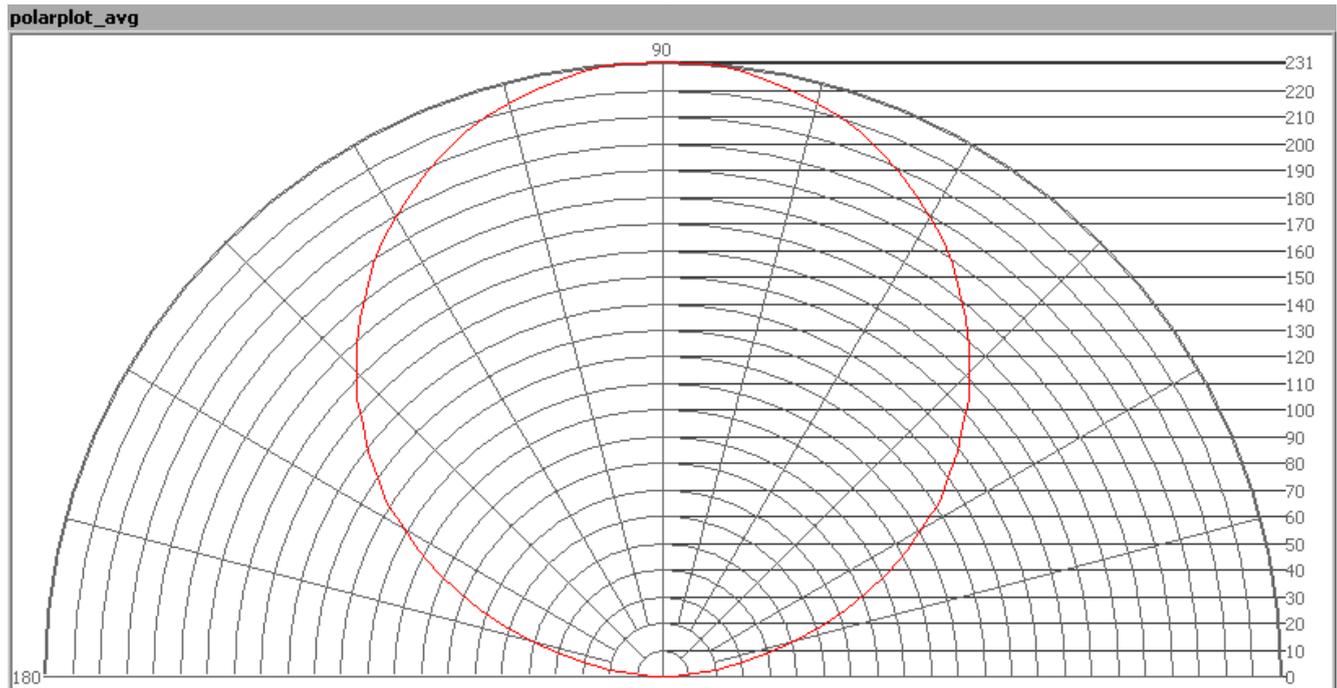


The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

Lampmeetrapport - 14 jan 2012

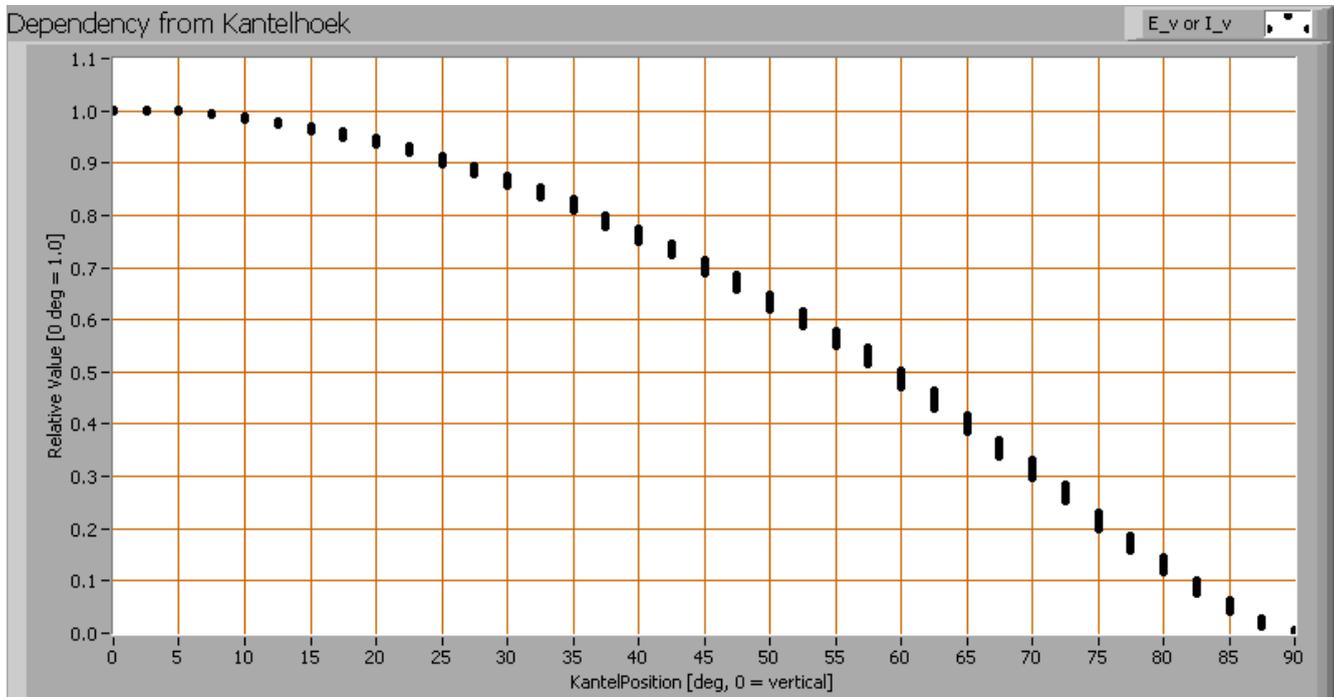

Intensity data of every measured turn angle at each inclination angle.

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used.

When using the average values per inclination angle, the beam angle can be computed, being 118 deg for the C0-C180 plane and 118 deg for the C90-C270 plane.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 699 lm.

Luminous efficacy

The luminous flux being 699 lm, and the consumed power of the lamp being 9.5 Watt, results in a luminous efficacy of 74 lm/Watt.


Lampmeetrapport - 14 jan 2012

Electrical properties


The power factor is 1.00. The tests were done with a DC power supply. This results in no blind power and as a result the power factor is always 1.0 but not relevant to mention.

Lamp voltage	12.0 V
Lamp current	0.788 A
Power P	9.5 W
Apparent power S	9.5 VA
Power factor	1.00

Temperature measurements lamp

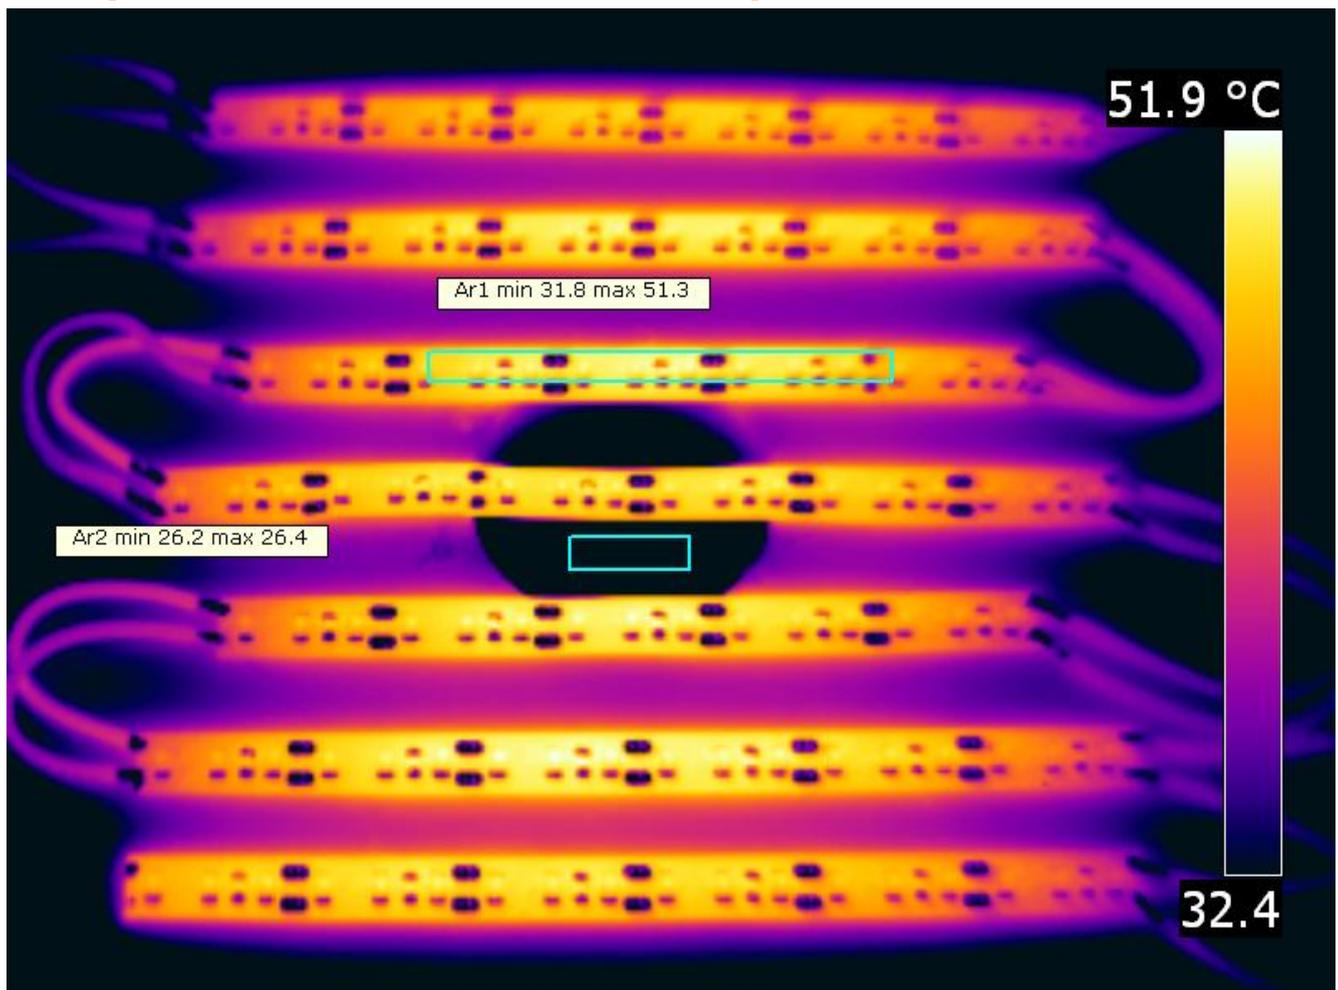

Lampmeetrapport - 14 jan 2012

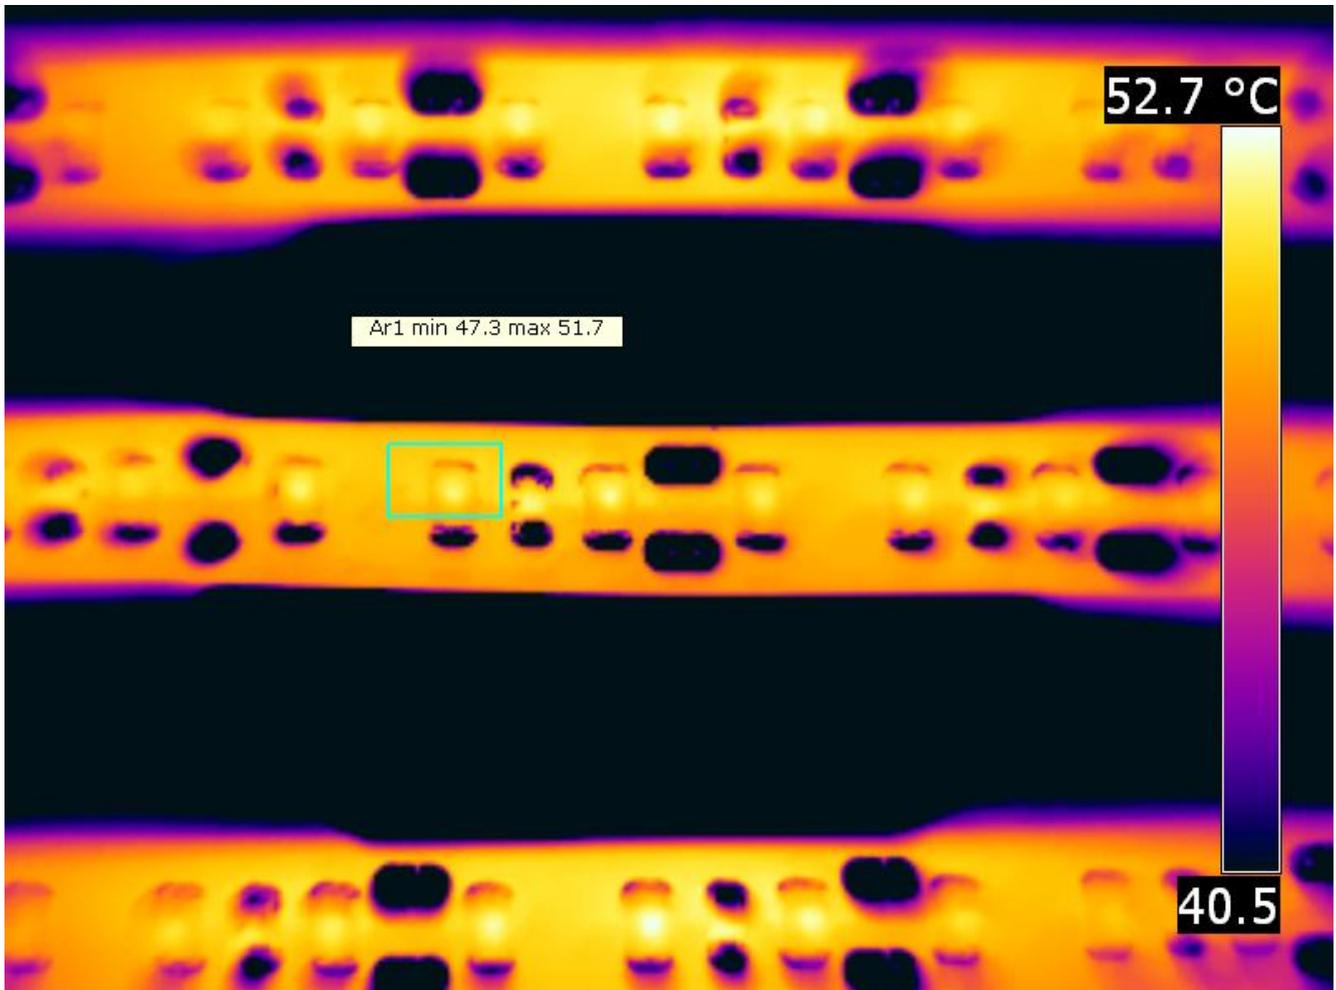


Temperature image(s).

status lamp	> 2 hours on
ambient temperature	26.5 deg C
reflected background temperature	26.5 deg C
camera	Flir T335
emissivity	0.95
measurement distance	0.3, 1 m
IFOV_geometric	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

Lampmeetrapport - 14 jan 2012

Color temperature and Spectral power distribution

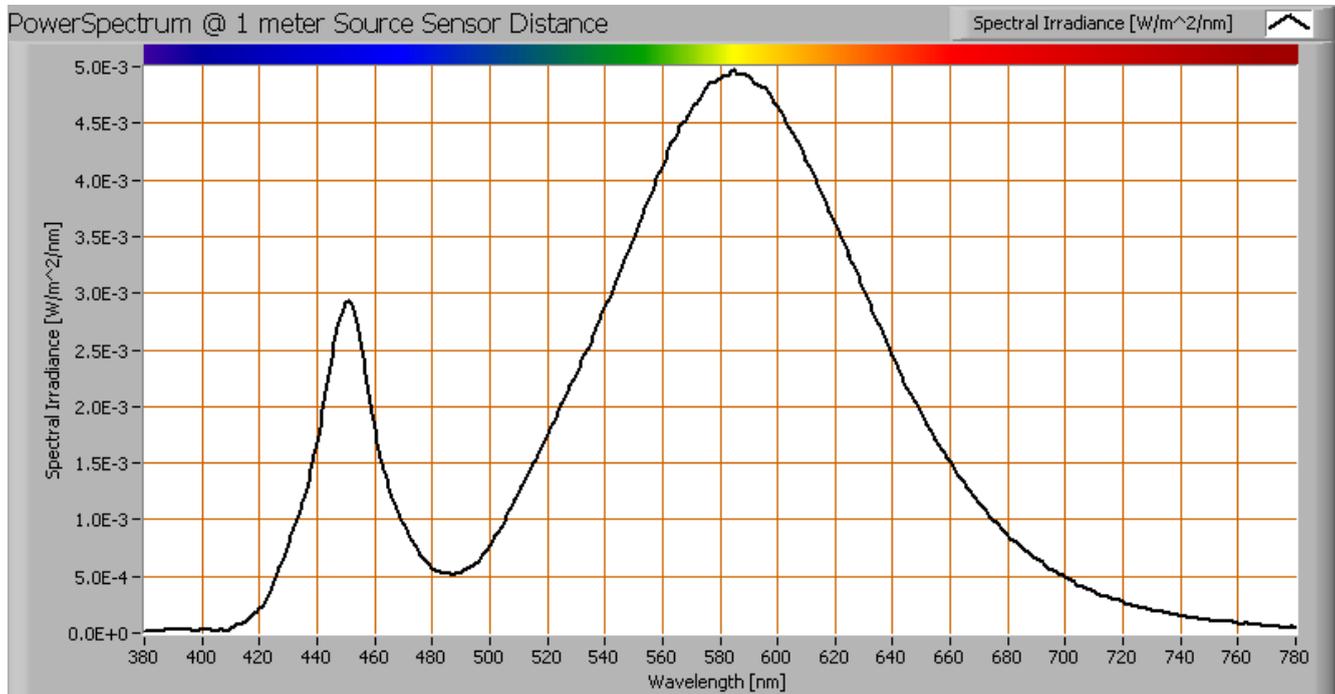


The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.

The measured color temperature is 3200 K which is warm white (close to neutral white).

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

Lampmeetrapport - 14 jan 2012

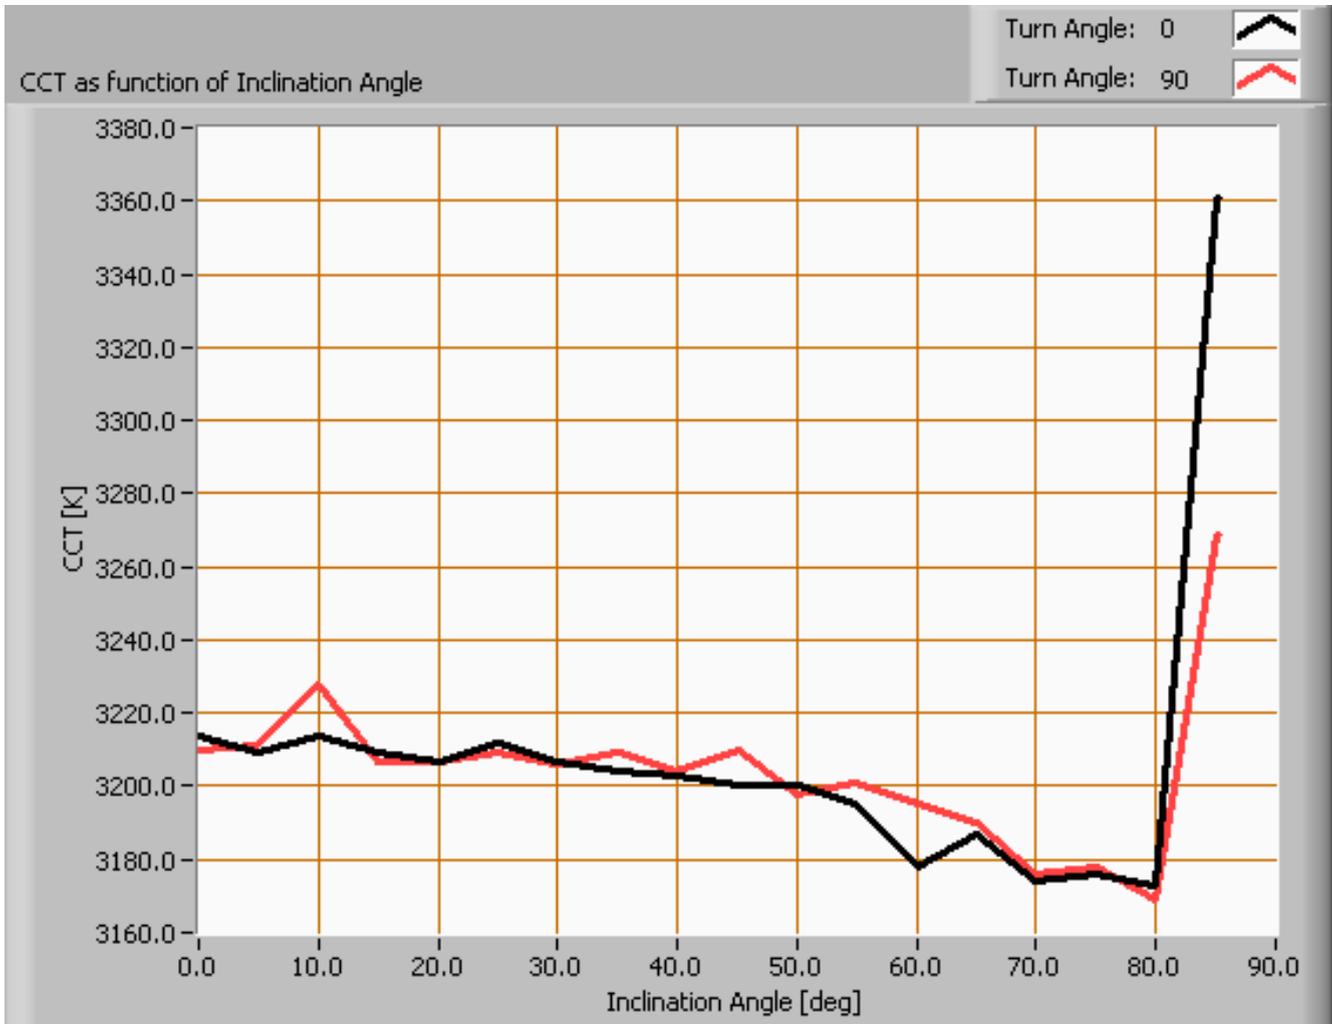

Color temperature as a function of inclination angle.

The color temperature is given for inclination angles up to 85 deg. Beyond that value the illuminance is so low (< 5 lux) that it has not been used for color determination of the light.


For the C0-C180 plane: the beam angle of 118 deg is equivalent to 59.2 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 1 %.

For the C90-C270 plane: the beam angle of 118 deg is equivalent to 59.1 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 1 %.

Lampmeetrapport - 14 jan 2012

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the explanation about PAR on the OLiNo website how this all is determined and the explanation of the graph.

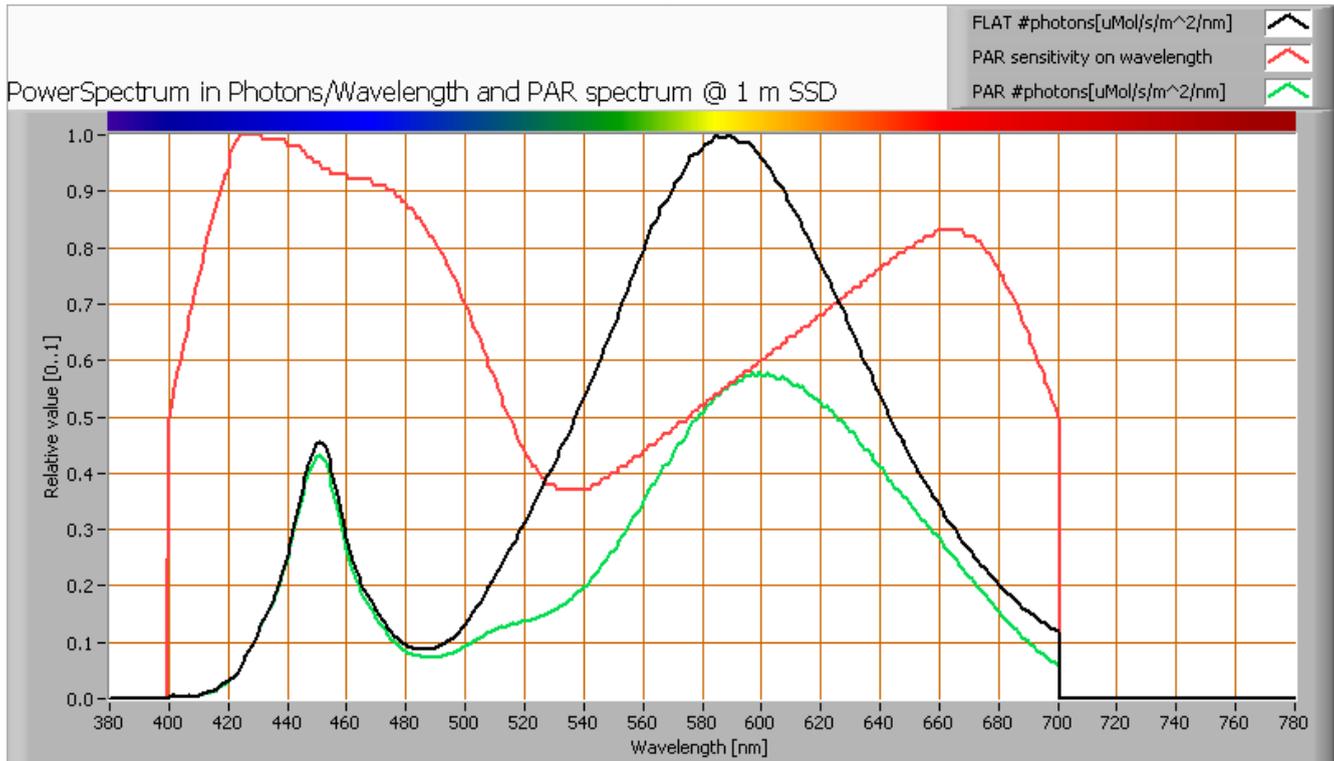

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb


parameter	value	unit
PAR-number	1.9	uMol/s/m ²
PAR-photon current	5.8	uMol/s
PAR-photon efficacy	0.6	uMol/s/W

The PAR efficiency is 62 % (valid for the PAR wave length range of 400 - 700 nm). This is the maximum percentage of the total of photons in the light that is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

Lampmeetrapport - 14 jan 2012

S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

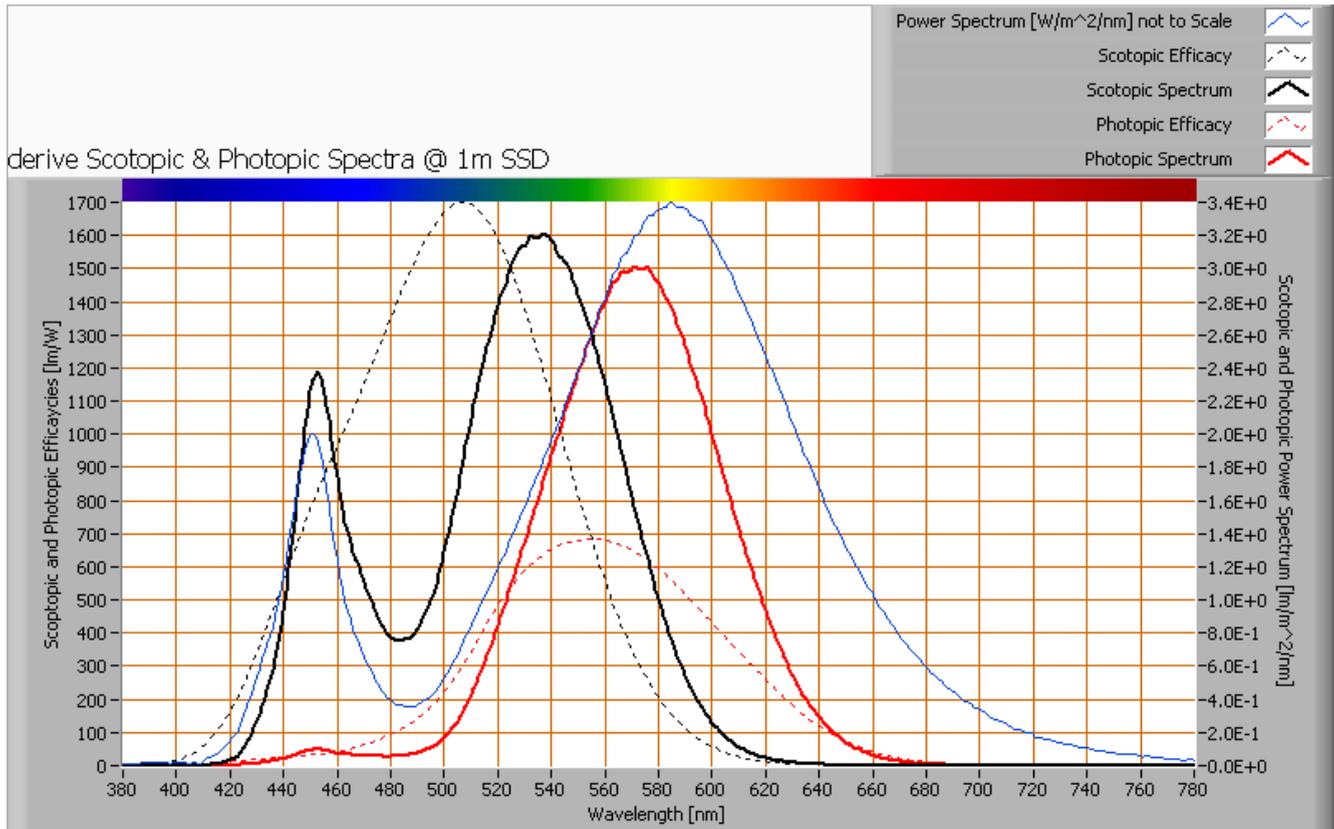


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio of the light coming from this lamp is 1.2.

More info on S/P ratio can be found on the OliNo website.

Lampmeetrapport - 14 jan 2012

Chromaticity diagram

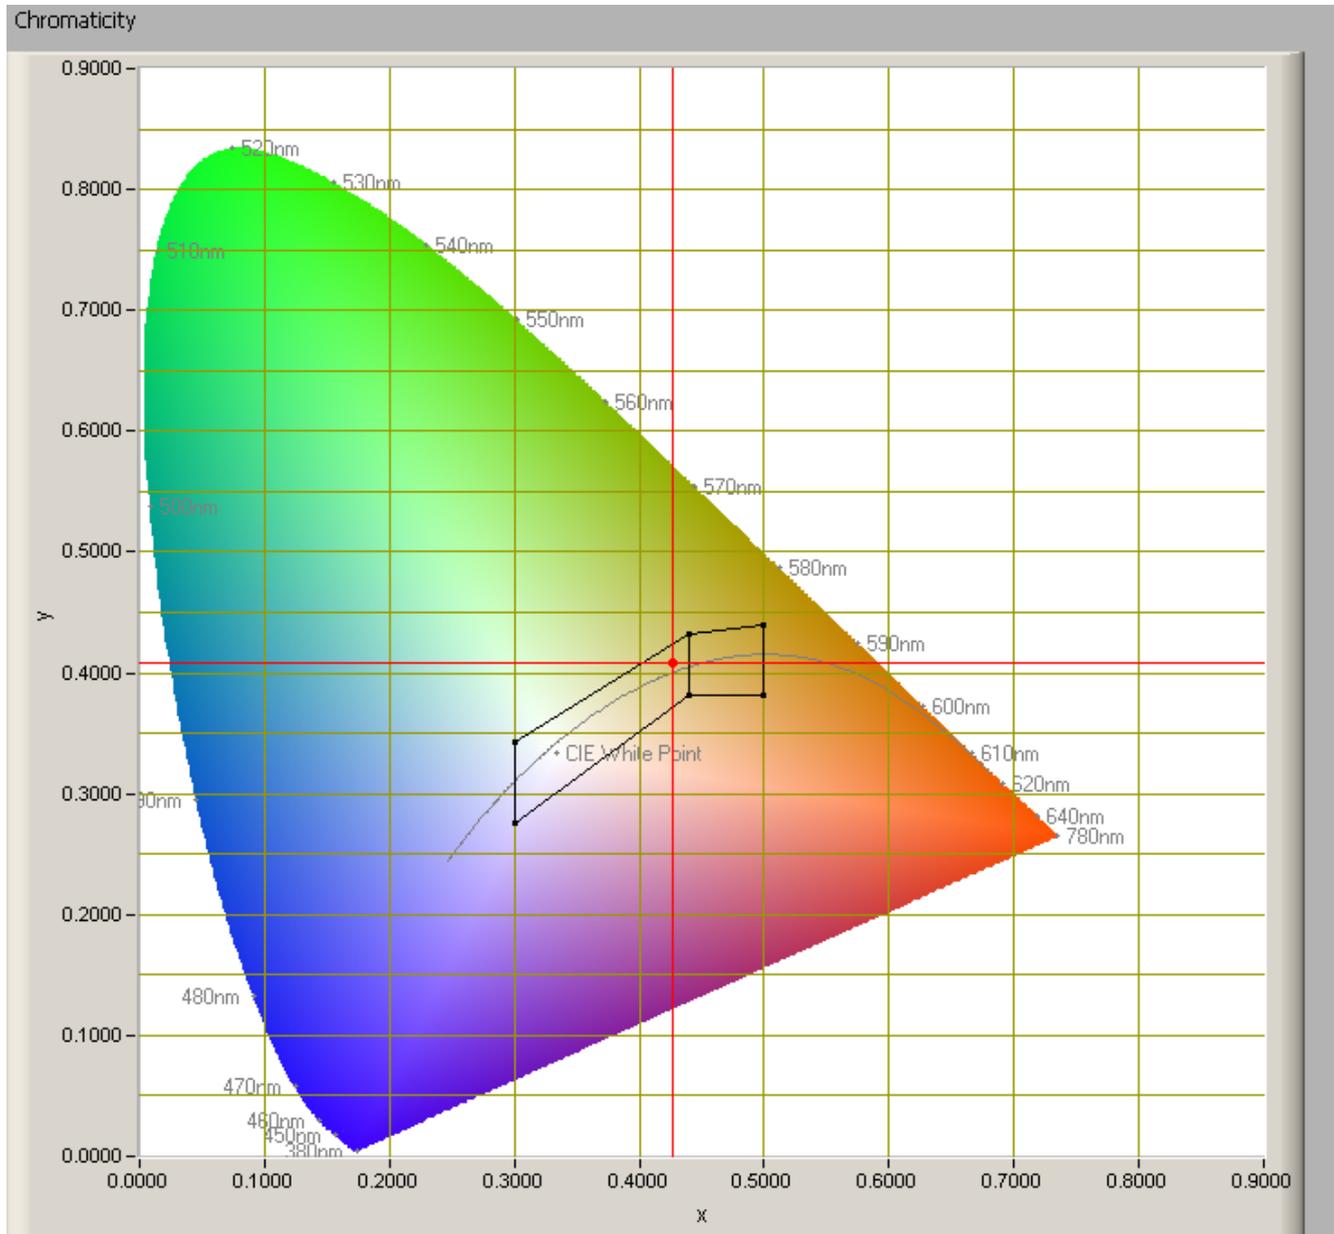

The chromaticity space and the position of the lamp's color coordinates in it.

The point of the light in this diagram is inside the area indicated with class A. This area indicates an area for signal lamps, see also the article on signal lamps and color areas on the OLiNo website.


The color coordinates are $x=0.4269$ and $y=0.4076$.

Lampmeetrapport - 14 jan 2012

Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OLiNo website.

Each color has an index R_x , and the first 8 indexes ($R_1 \dots R_8$) are averaged to compute the R_a which is equivalent to the CRI.

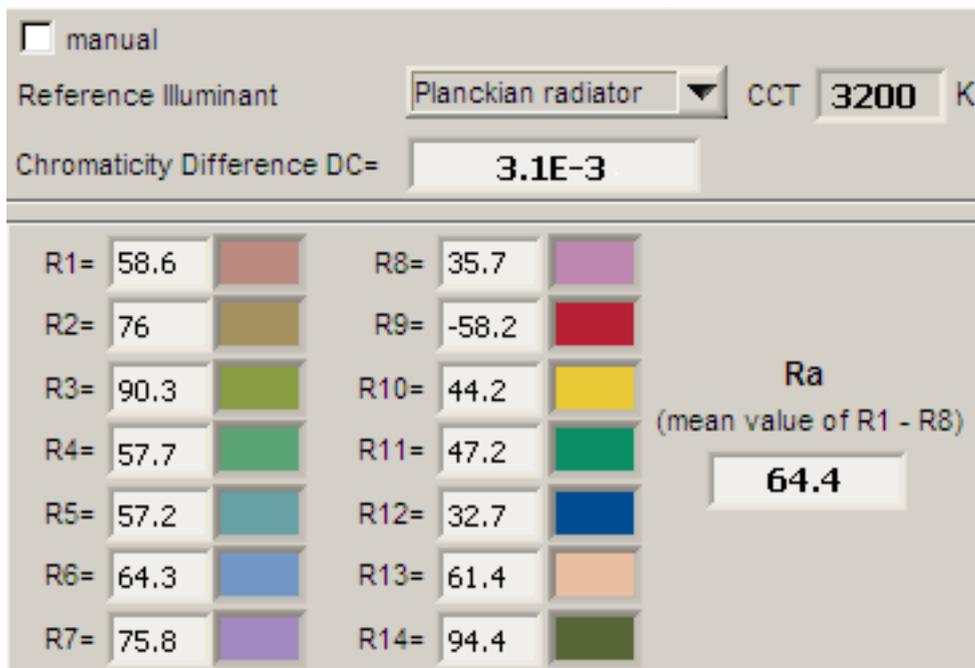

CRI of the light of this lightbulb.

This value of 64 indicates how well the light of this lamp can render well a set of reference colors, this in comparison with the light of a reference source (for color temperatures $< 5000\text{K}$ a black radiator is used as reference and for color temperatures $> 5000\text{K}$ the sun or the light outside during the day).

The value of 64 is smaller than the value of 80 that is considered as a minimum for working areas in general.


Note: the chromaticity difference is 0.0031 and indicates the distance to the Planckian Locus. There is a value mentioned of max $5.4\text{E-}3$ in section 5.3 of CIE 13.3-1995 however not further explanation of it.

An other reference with signal lights as a reference is given in the chromaticity diagram.

Lampmeetrapport - 14 jan 2012

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W] (this latter is estimated here by dividing the found E_v value by P).

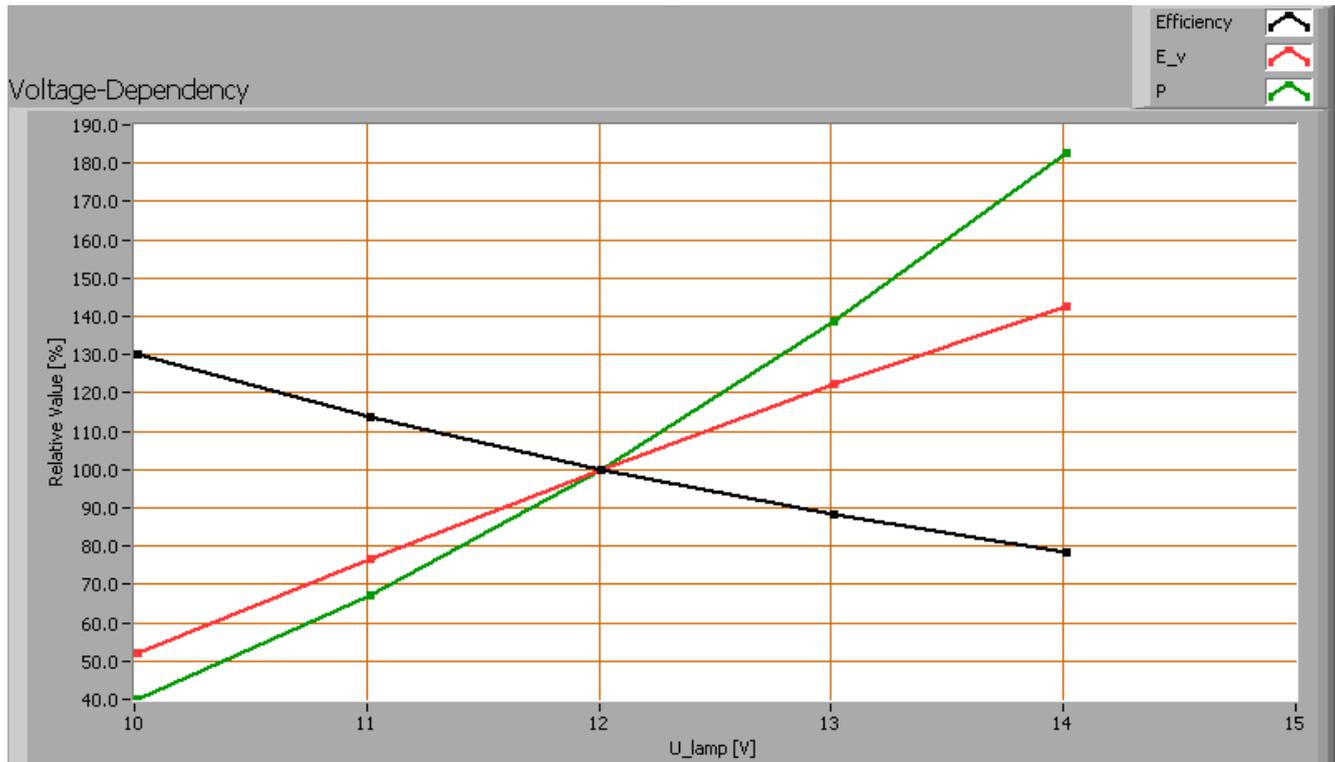

Lamp voltage dependencies of certain light bulb parameters

There is a constant dependency of the illuminance when the power voltage varies between 10 - 14 V DC.



There is a constant dependency of the consumed power when the power voltage varies between 10 - 14 V DC.

When the voltage varies abruptly with + or - 0.25 V DC then this results in a variation of the illuminance of maximally 5.9 %. This difference in illuminance is not visible (when it occurs abruptly).

Lampmeetrapport - 14 jan 2012

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

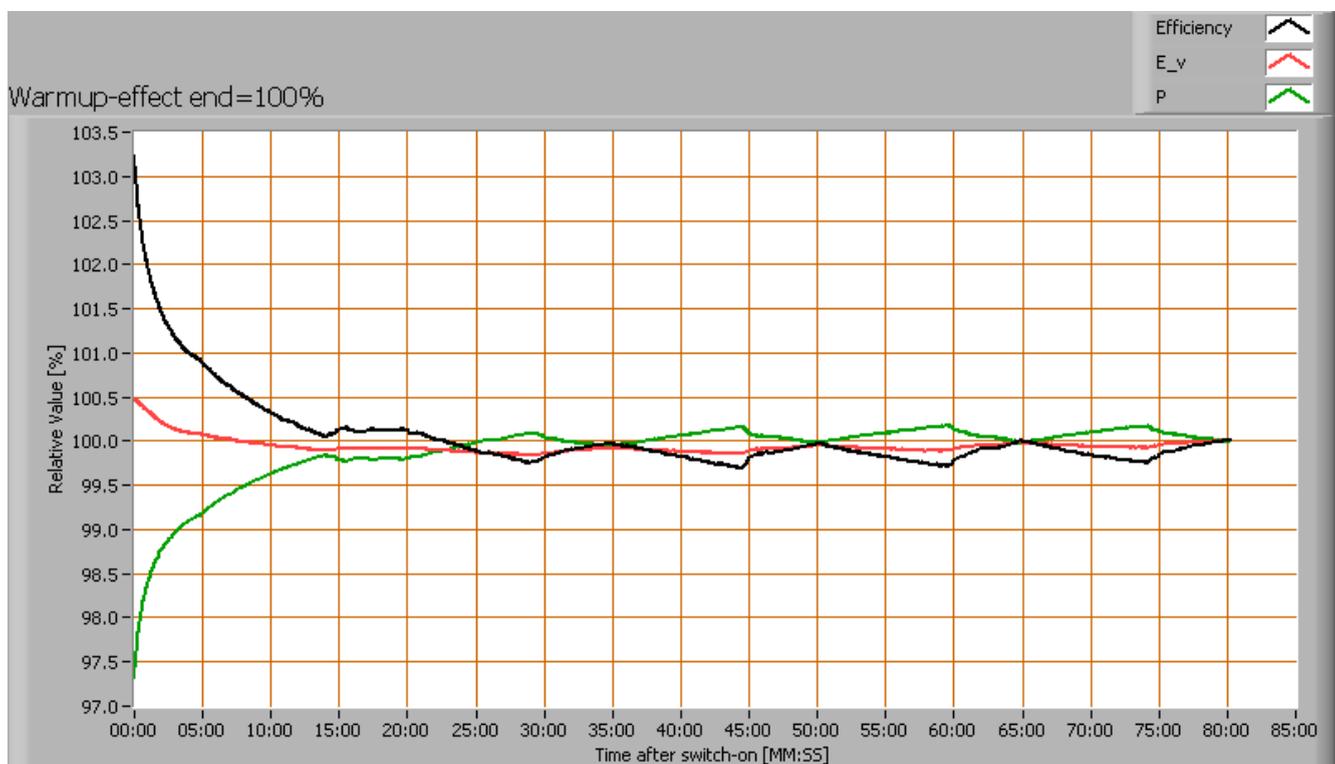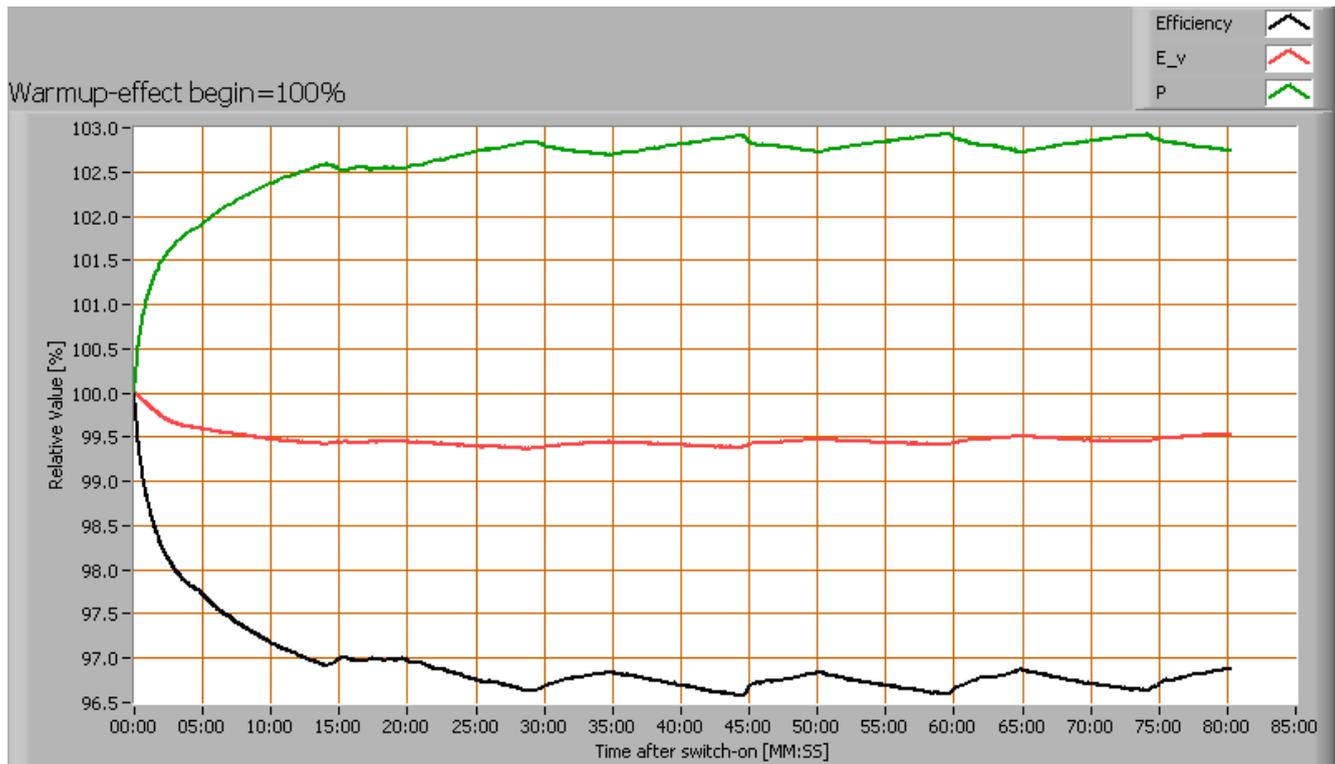

Effect of warming up on different light bulb parameters. In the first graph the 100 % level is put at begin, and in the last graph the 100 % level is put at the end.


Lampmeetrapport - 14 jan 2012

During the warmup time the illuminance doesn't vary significantly (< 5 %).

During the warmup time the power doesn't vary significantly (< 5 %).

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the article on flickering on OLiNo site for more information.

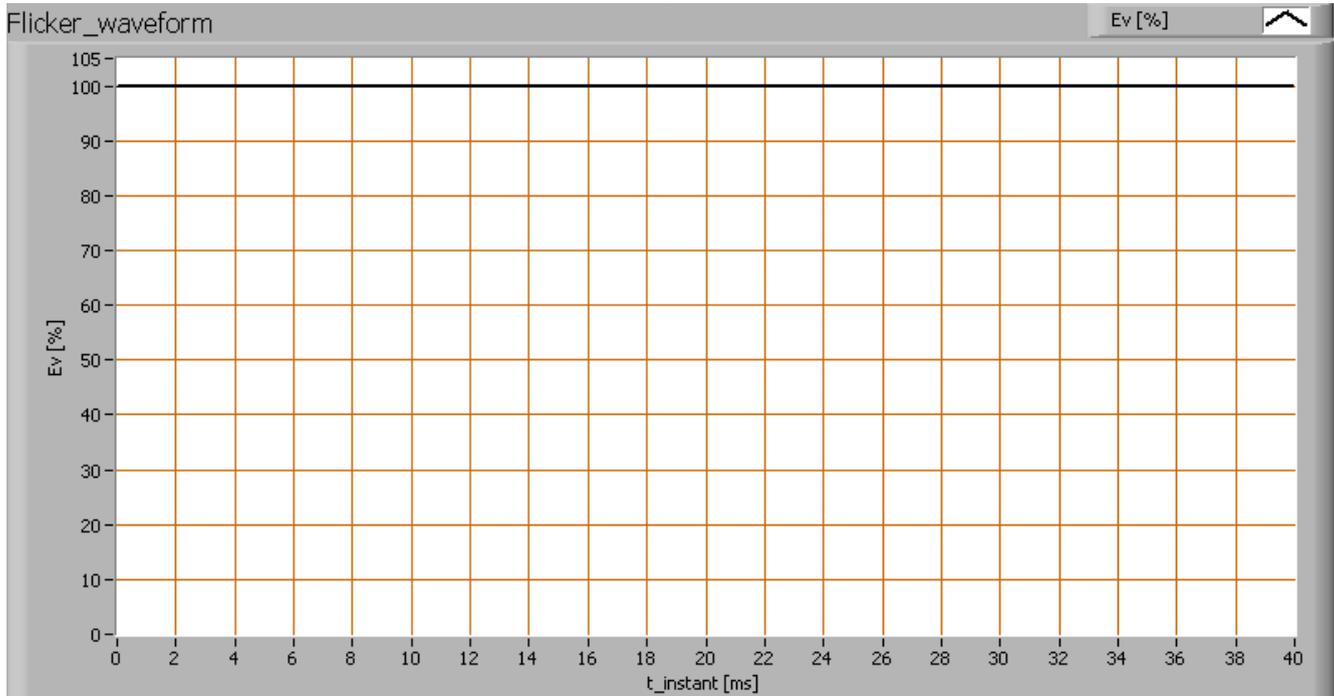

The measure of fast illuminance variation of the light of the light bulb

parameter	value	unit
Flicker frequency	565.8	Hz
Illuminance modulation index	0	%

The illuminance modulation index is computed as: $(\max_Ev - \min_Ev) / (\max_Ev + \min_Ev)$.

Lampmeetrapport - 14 jan 2012

Biologic effect

The biologic effect shows the level of impact the light of this lamp can have on the day-night rhythm of human beings (as well as the suppression of melatonin production). See also the explanatory article on biologic effect on OliNo.

The important parameters (according to prenorm DIN V 5031-100:2009-06):


biologic effect factor	0.332
k_biol trans (25 years)	1.000
k_biol trans (50 years)	0.747
k_biol trans (75 years)	0.481
k_pupil(25 years)	1.000
k_pupil(50 years)	0.740
k_pupil(75 years)	0.519

Lampmeetrapport - 14 jan 2012

Blue Light Hazard

The amount of blue light and the harm it can cause on the retina has been determined. Herewith the results.

See for more info the explanation about blue light hazard on the OliNo site.

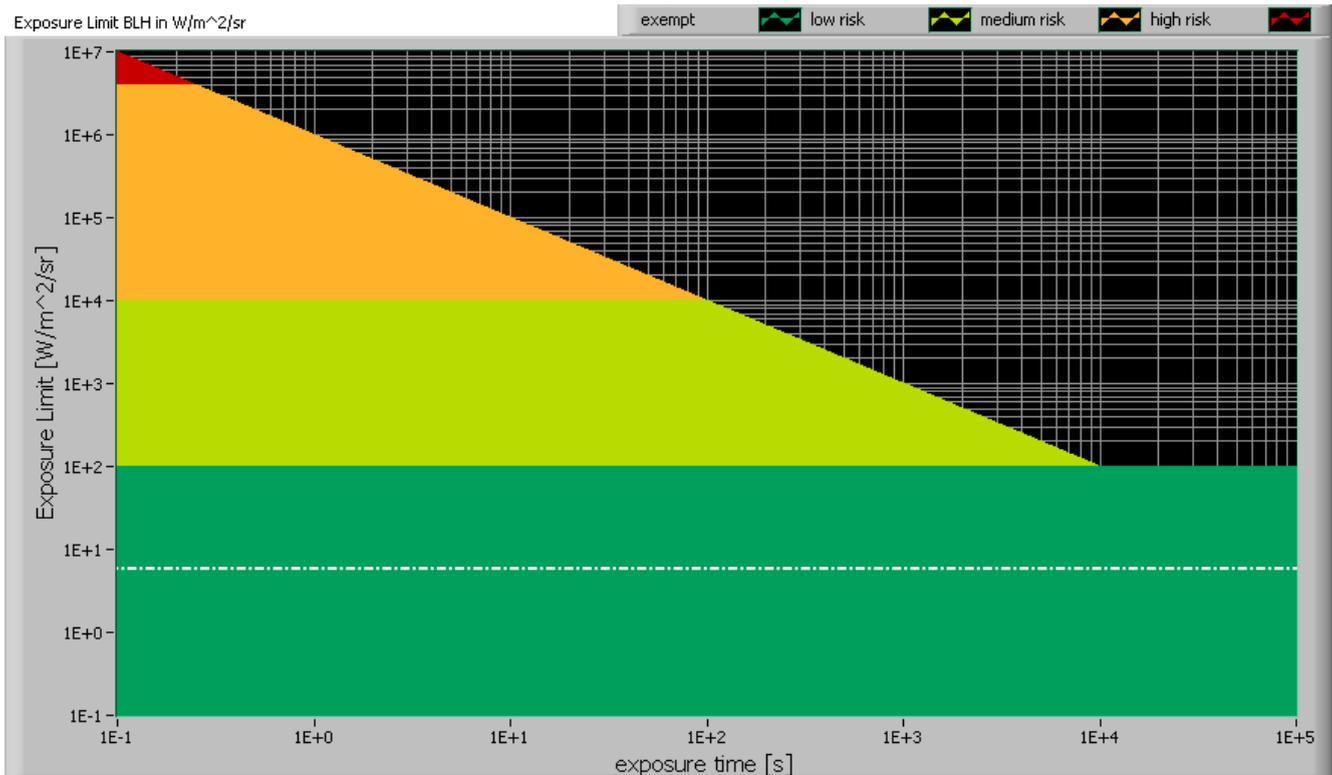


The level of blue light of this lamp related to the exposure limit and the different classification areas.

L_lum0 [mm]	984	Luminous dimension of lamp in C0-C180 direction.
L_lum90 [mm]	3	Luminous dimension of lamp in C90-C270 direction.
SSD_500lx [mm]	679	Calculated distance where $E_v = 500$ lux. This computation is valid when it is in the far field of the lamp. Note: if this value < 200 mm then the distance of 200 mm is taken as proposed in the norm IEC 62471:2006.
Start of far field [mm]	4920	Minimum distance at which the lamp can be seen as a point source. In this area the E_v is linearly dependent from $(1/distance)^2$.
300-350 nm values stuffed with 0s	no	In the event OliNo has measured with a SpB1211 spectrometer without UV option then the irradiance data of 300-349 nm is missing. For lamps where there is already no energy content near 350 nm, the values 300-349 can also be set at zero then.
alpha_C0-C180 [rad]	1.448	(Apparent) source angle in C0-C180 direction.

Lampmeetrapport - 14 jan 2012

alpha_C90-C270 [rad]	0.004	(Apparent) source angle in C90-C270 direction.
alpha_AVG [rad]	0.052	Average (apparent) source angle. If average ≥ 0.011 rad then the exposure limit is computed with radiance L_b . Otherwise with irradiance E_b .
Exposure value [$W/m^2/sr$]	$<5.79E+0$	Blue Light Hazard value for this lamp, measured straight underneath the lamp. Computation is referenced to L_b . Because the distance at 500 lux is in the near field, then this exposure value is too pessimistic and should be lower.
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.

Extra

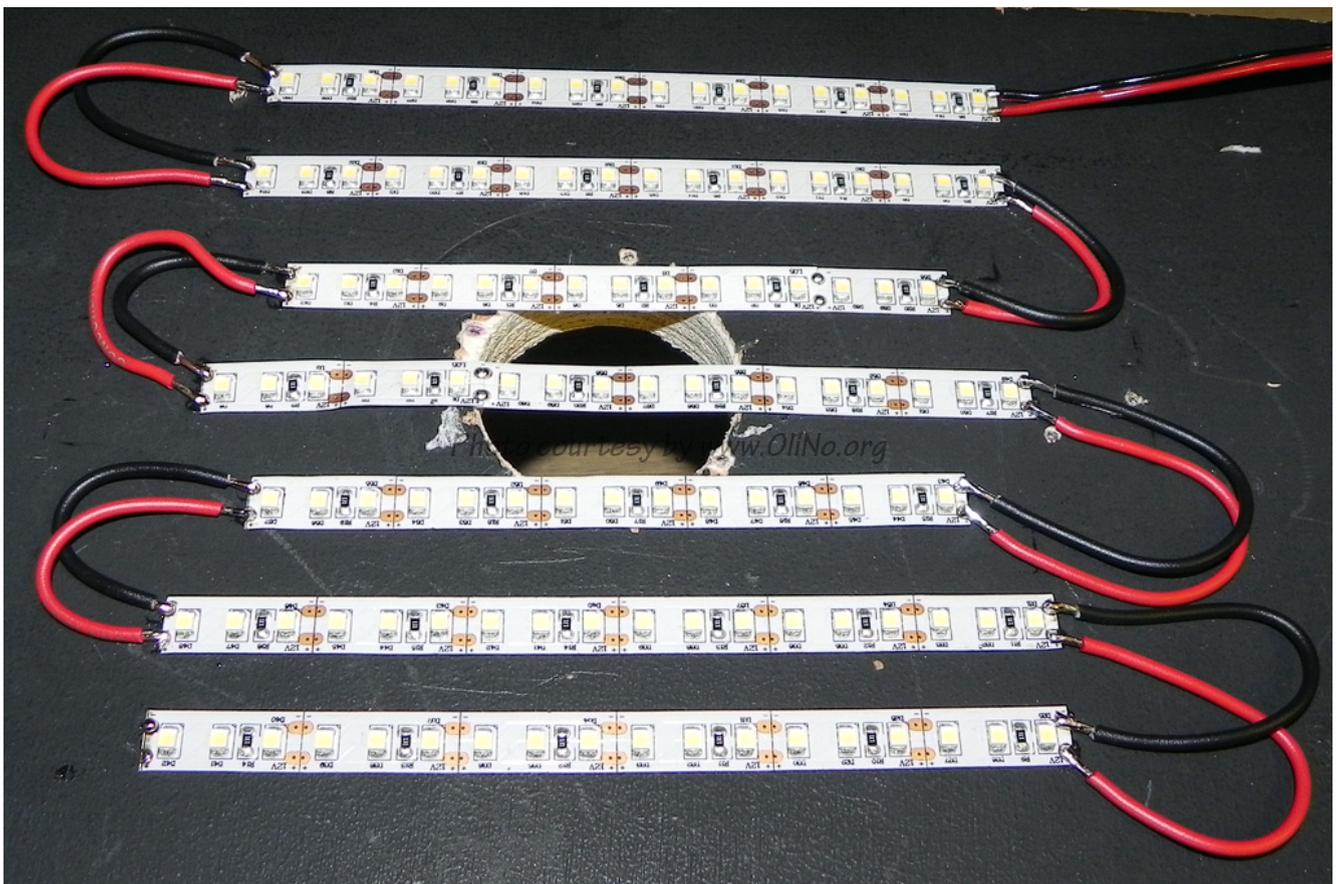

1 m ledstrip gemonteerd voor de meting.

Disclaimer

De informatie in dit meetrapport van OliNo is met de grootst mogelijke zorg samengesteld. Desondanks kan het voorkomen dat er onvolkomenheden in de informatie zitten. OliNo kan niet aansprakelijk worden gesteld voor de inhoud van de informatie in dit meetrapport en / of voor de gevolgen van het gebruik ervan. Aan de gegevens, zoals die in dit meetrapport van OliNo worden weergegeven, kunnen geen rechten worden ontleend.

Er is naar gestreefd de rechten van de illustraties in dit artikel/werk te regelen volgens de wettelijke bepalingen. Hiervoor is daar waar nodig contact gezocht met de rechtenhebbende. Als het zo is dat dat niet zou zijn gebeurd voor een voorkomend geval en er wordt gemeend

Lampmeetrapport - 14 jan 2012

rechten te kunnen doen gelden, gelieve dan contact op te nemen met OLiNo zodat naar een passende oplossing gewerkt kan worden.

Licentie

Dit meetrapport is met grote zorgvuldigheid samengesteld en bevat meetdata afkomstig van onafhankelijke professionele metingen uitgevoerd door OLiNo. Het is toegestaan om dit rapport in ongewijzigde vorm beschikbaar te maken of te verspreiden via internet of andere digitale media. Om de betrouwbaarheid van dit rapport te garanderen is het ten strengste verboden om dit rapport zelf te wijzigen of in gewijzigde vorm te her-publiceren.