

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

LEDframe 56-2 4000K

by

Taglumo Lighting



TAGLUMO®

Lighting

Lamp measurement report - 26 April 2015

Summary measurement data

parameter	meas. result	remark
Color temperature	4329 K	neutral white
Luminous intensity I _v	158.6 Cd	Measured straight underneath the lamp.
Illuminance modulation index	0 %	Measured with a light sensor looking at the lamp (angle not defined). Is a measure for the amount of flickering.
Beam angle	110 deg	110 deg is the beam angle for all C-planes since the lamp is symmetrical along its 1st axis.
Power P	10.4 W	The net power consumed.
Power Factor	1.00	The tests were done with a DC power supply. This results in no blind power and as a result the power factor is always 1.0 but not relevant to mention.
THD	NaN %	Total Harmonic Distortion, is not present as a DC voltage was used to power the lamp so a DC current resulted which has no THD.
Luminous flux	445 lm	Measured with photogoniometer, calculation done as described in LM79-08.
Luminous efficacy	43 lm/W	Be aware that a DC power supply has been used. The found efficacy with this measurement is excluding the power supply that normally is needed to convert the grid voltage (230 V AC) to the used DC voltage. By excluding the consumption of the power supply the efficacy found here is higher than it would be when the power supply had been included.
EU2013-label classification	B	The energy class, from A++ (more efficient) to E (least efficient). This label is an update of the previous version, and compulsory from Sept 2013.
CRI _{Ra}	86	Color Rendering Index.
CQS	85.0	QCS (v9.0.3) is an improved indicator (over CRI) of how well colors are rendered.
Coordinates chromaticity diagram	x=0.3683 en y=0.3671	
Fitting	24V DC	This lamp is connected to 24V DC.
PAR-value	1.5 uMol/s/m ²	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.

TAGLUMO®

Lighting

Lamp measurement report - 26 April 2015

parameter	meas. result	remark
PAR-photon efficacy	0.4 uMol/s/W_e	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
Photon current	6.8 uMol/s	The total number of photons in the light of this lamp.
S/P ratio	1.8	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
L x W x H external dimensions	406 mm x 305 mm x 55 mm	External dimensions of the lamp.
L x W luminous area	372 mm x 272 mm	Dimensions of the luminous area (used in Eulumdat file). It is the surface of the white cover.
General remarks		<p>The ambient temperature during the whole set of illuminance measurements was 25.7 - 25.7 deg C. The temperature of the lamp gets maximally about 3.5 degrees hotter than ambient temperature. Warm up effect: During the warmup time the illuminance doesn't vary significantly (< 5 %).</p> <p>During the warmup time the power doesn't vary significantly (< 5 %). The variation in efficacy (calculated as indication by simply dividing the illuminance by the power) during the warming up is -1 %. A very high negative value indicates a significant decrease for instance due to heating up of the lamp (decrease of lifetime).</p> <p>Voltage dependency: There is a constant dependency of the illuminance when the power voltage varies between 22 - 26 V DC. There is a constant dependency of the consumed power when the power voltage varies between 22 - 26 V DC.</p>
Eff-variation	-1 %	This is the variation in efficacy (calculated as indication by simply dividing the illuminance by the power) during the warming up. A very high negative value indicates a significant decrease for instance due to heating up of the lamp (decrease of lifetime).
Dimmable	yes	Info from manufacturer.
Biologic effect factor	0.607	According to pre-norm DIN V 5031-100:2009-06.


TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

parameter	meas. result	remark
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.
form factor	panel	

Overview table

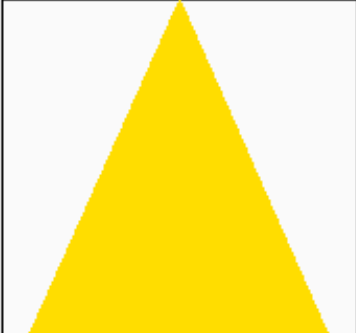m.	Ø 50%		C0-180: 110° C90-270: 110°	E (lux)	Luminaire Efficacy
	C0-180	C90-270			43 (lumen per Watt)
1	2.87	2.87		159	Half-peak diam C0-180
1.5	4.31	4.31		70	2.87 x diameter(m)
2	5.74	5.74		40	Half-peak diam C90-270
3	8.61	8.61		18	2.87 x diameter(m)
4	11.49	11.49		10	Illuminance
6	17.23	17.23		4	159 / distance ² (lux)
8	22.97	22.97		2	Total Output
					445 (lumen)

Please note that this overview table makes use of calculations, use this data with care as explained on the OliNo site. E (lux) values are not accurate, when within 5 x 461 mm (maximal luminous size, eventually diagonally measured)= 2305 mm. Within this distance from the lamp (data given in red), the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.

TAGLUMO®

Lighting

Lamp measurement report - 26 April 2015

EU 2013 Energy label classification


Since Sept 2013 these labels will be needed.

Important for the energy classification are the corrected rated power and the useful luminous flux.

The measured rated power is 10.4 W and might need to be corrected. The correction is dependent from the lamp type and whether or not the lamp control gear is included or not. The choice for this lamp is the following classification: **Lamps operating on external LED lamp control gear**. As a result the corrected rated power becomes: 11.5 W.

The luminous flux measured is 445 lm. The classification of this lamp needed to determine the useful flux is: **Non-directional lamps**. Then the useful flux becomes 445 lm. Now a reference power can be calculated.

The energy efficiency coefficient is $P_{corr} / P_{ref} = 0.28$.

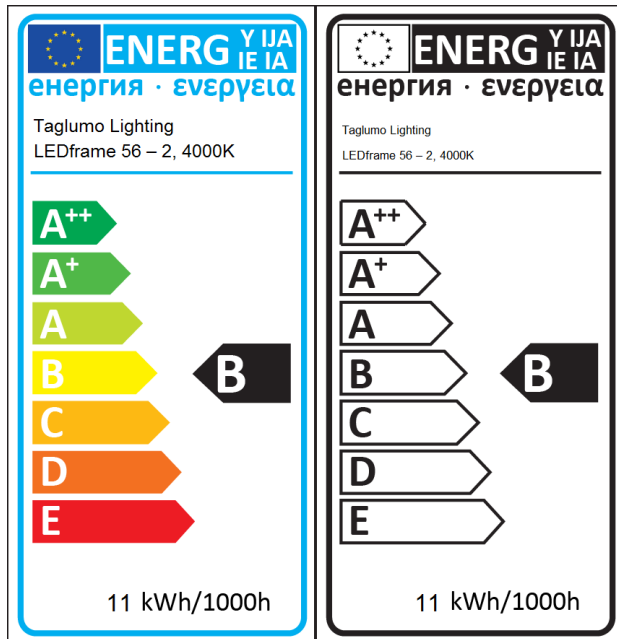


EU energy label for this lamp

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

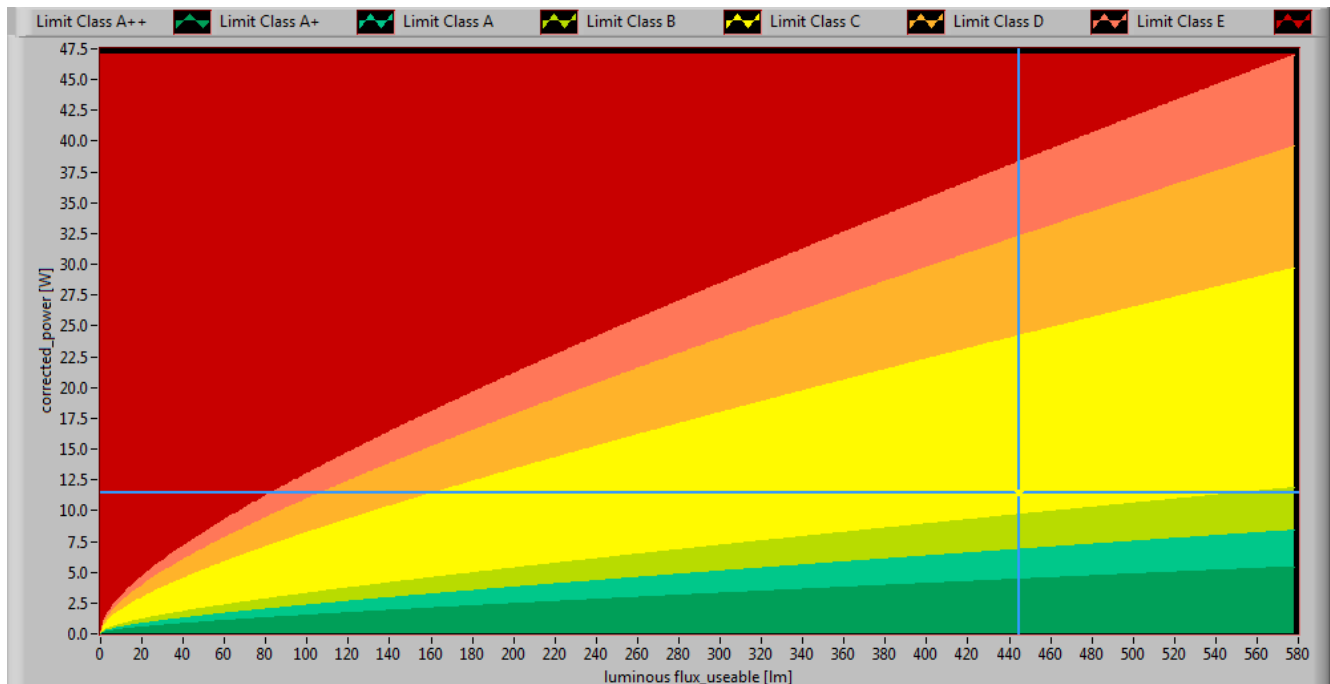

The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.


TAGLUMO®

Lighting

Lamp measurement report - 26 April 2015

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file.

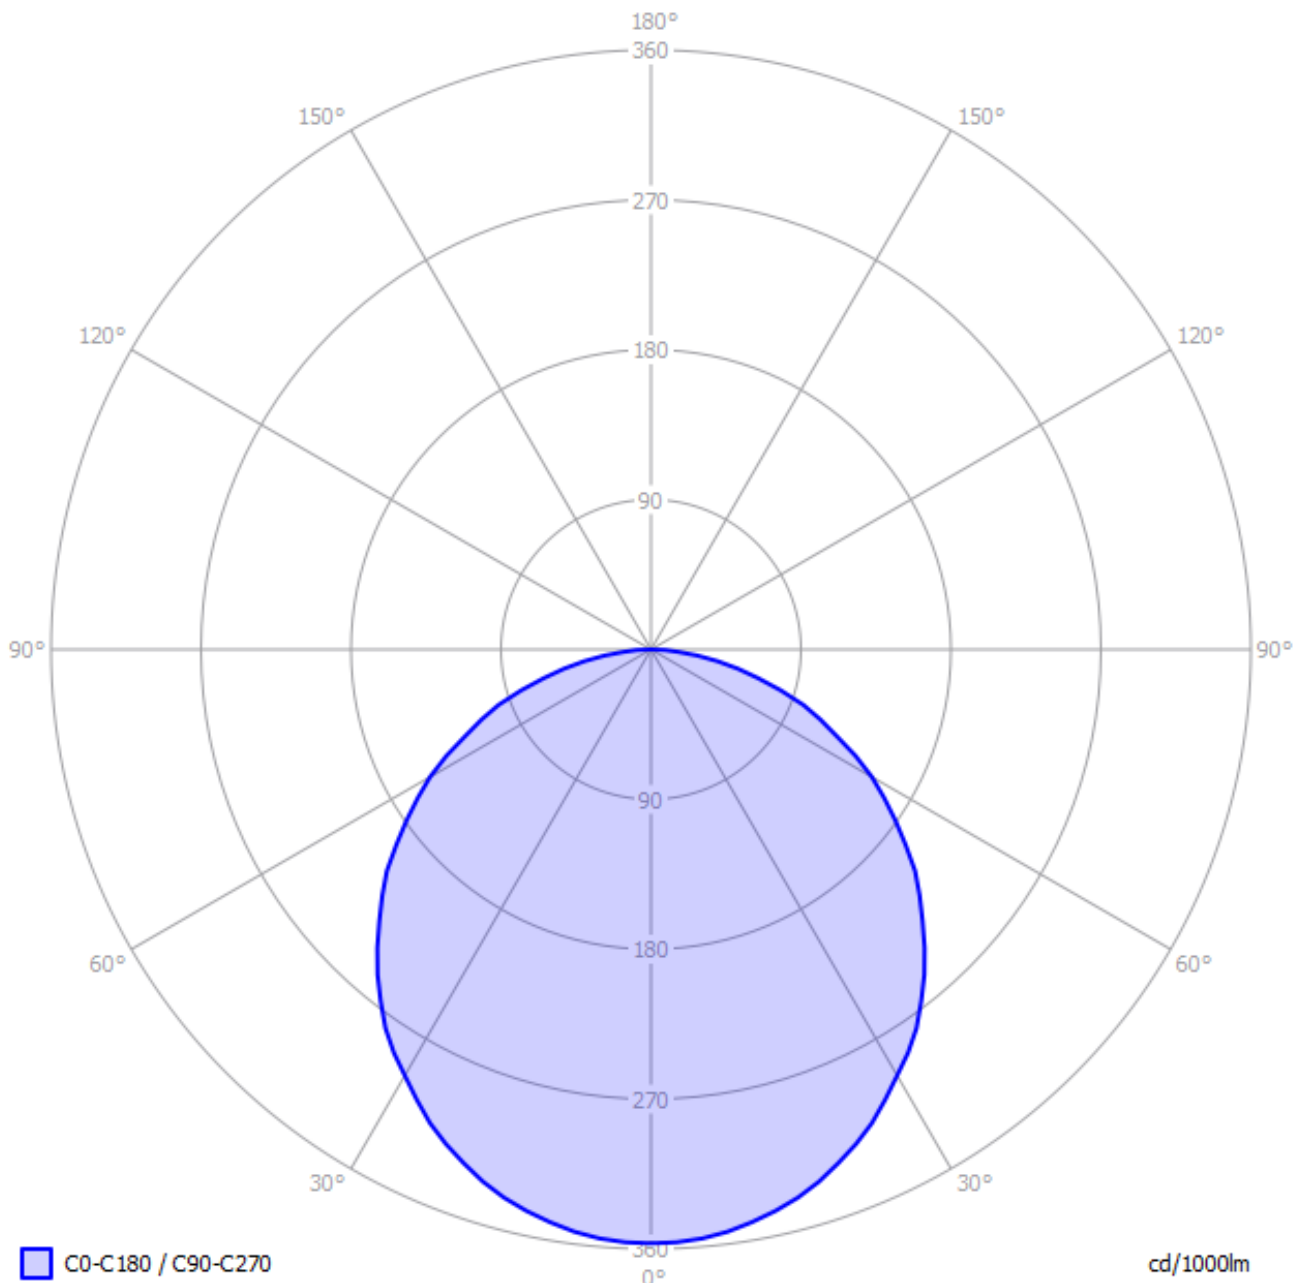

The light diagram giving the radiation pattern.

The light diagram indicates the beam in the C0-C180 plane and in the plane perpendicular to that, the C90-C270 plane. These beams are equal as the lamp has symmetry over its first axis (the vertical axis).


TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.

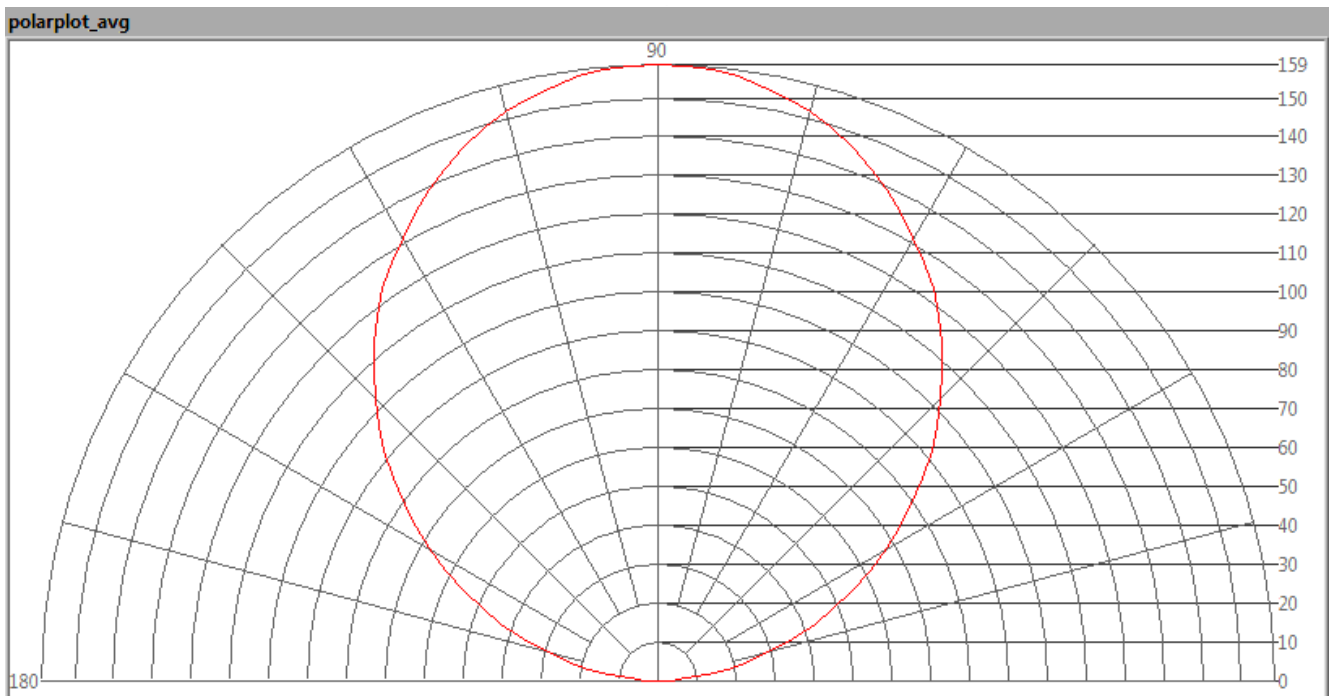

The radiation pattern of the light bulb.


This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

TAGLUMO®

Lighting

Lamp measurement report - 26 April 2015

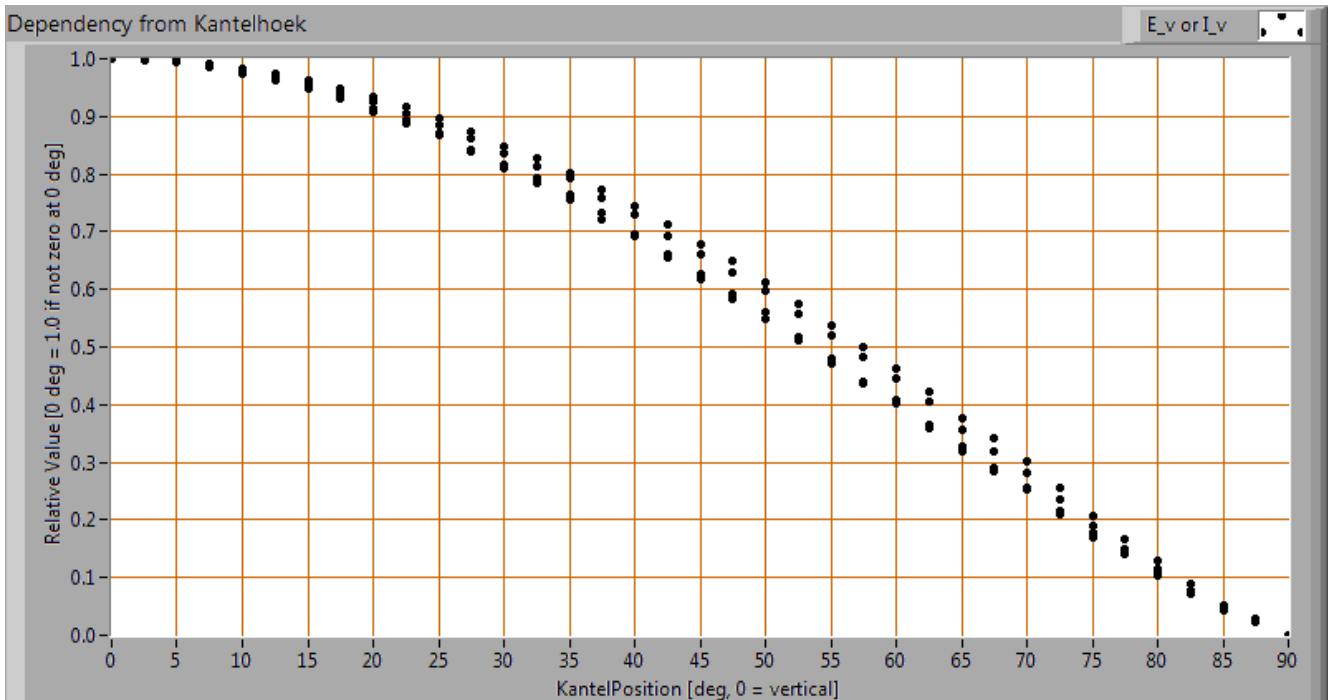

Intensity data of every measured turn angle at each inclination angle.

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used.

When using the average values per inclination angle, the beam angle can be computed, being 110 deg for the C0-C180 plane and 110 deg for the C90-C270 plane.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 445 lm.

Luminous efficacy

The luminous flux being 445 lm, and the consumed power of the lamp being 10.4 Watt, results in a luminous efficacy of 43 lm/Watt.

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Electrical properties

The power factor is 1.00. The tests were done with a DC power supply. This results in no blind power and as a result the power factor is always 1.0 but not relevant to mention.


Lamp voltage	24.00 V
Lamp current	0.434 A
Power P	10.4 W
Apparent power S	10.4 VA
Power factor	1.00

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Temperature measurements lamp

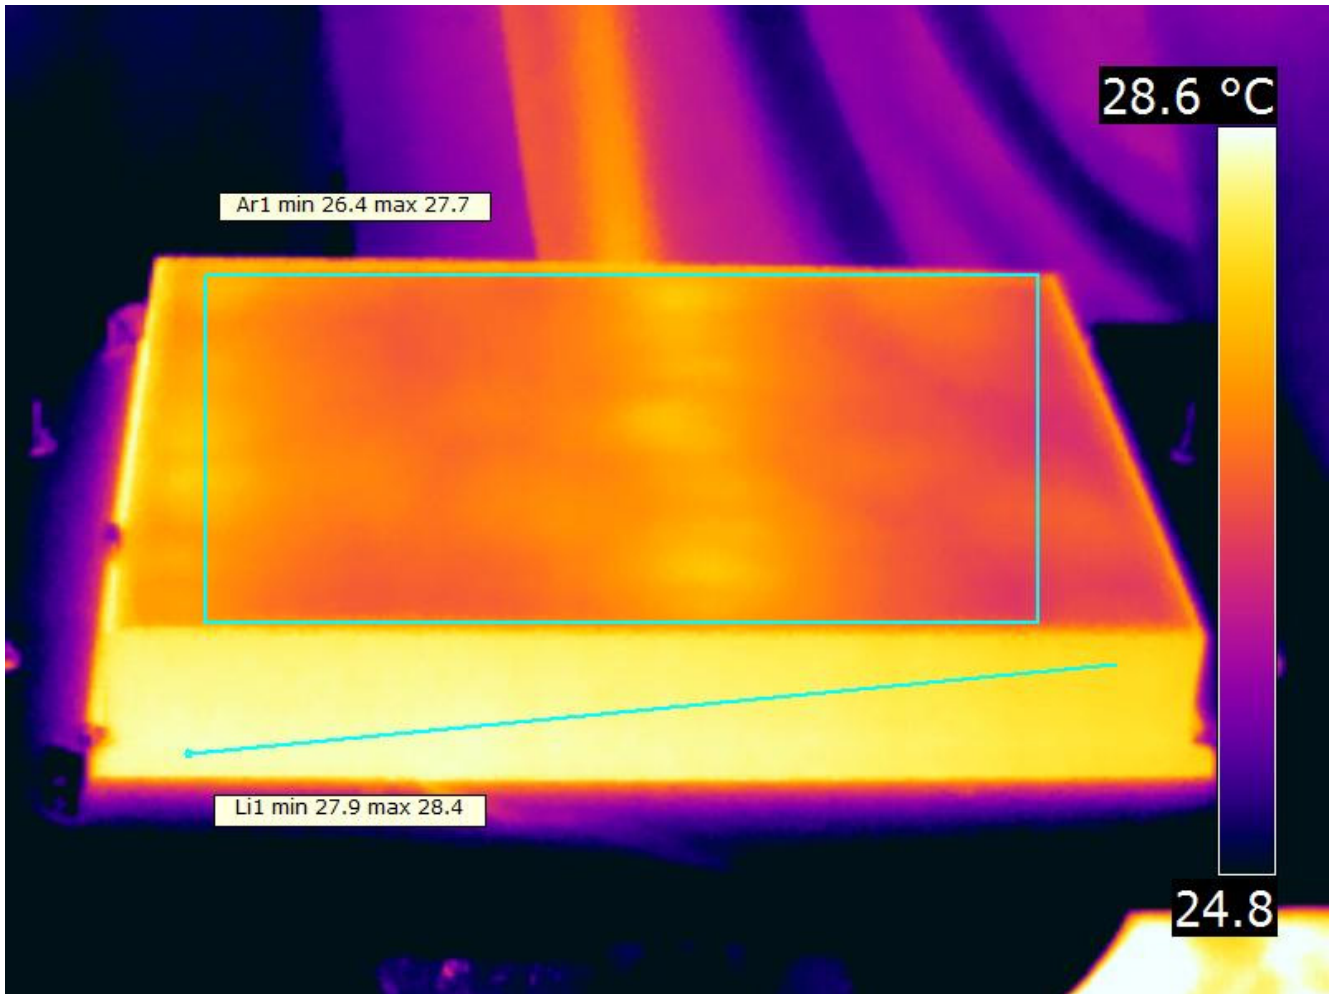

Temperature image(s).


status lamp	> 2 hours on
ambient temperature	24.8 deg C
reflected background temperature	24.8 deg C
camera	Flir T335
emissivity	0.95
measurement distance	1.5 m
IFOV_geometric	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Color temperature and Spectral power distribution

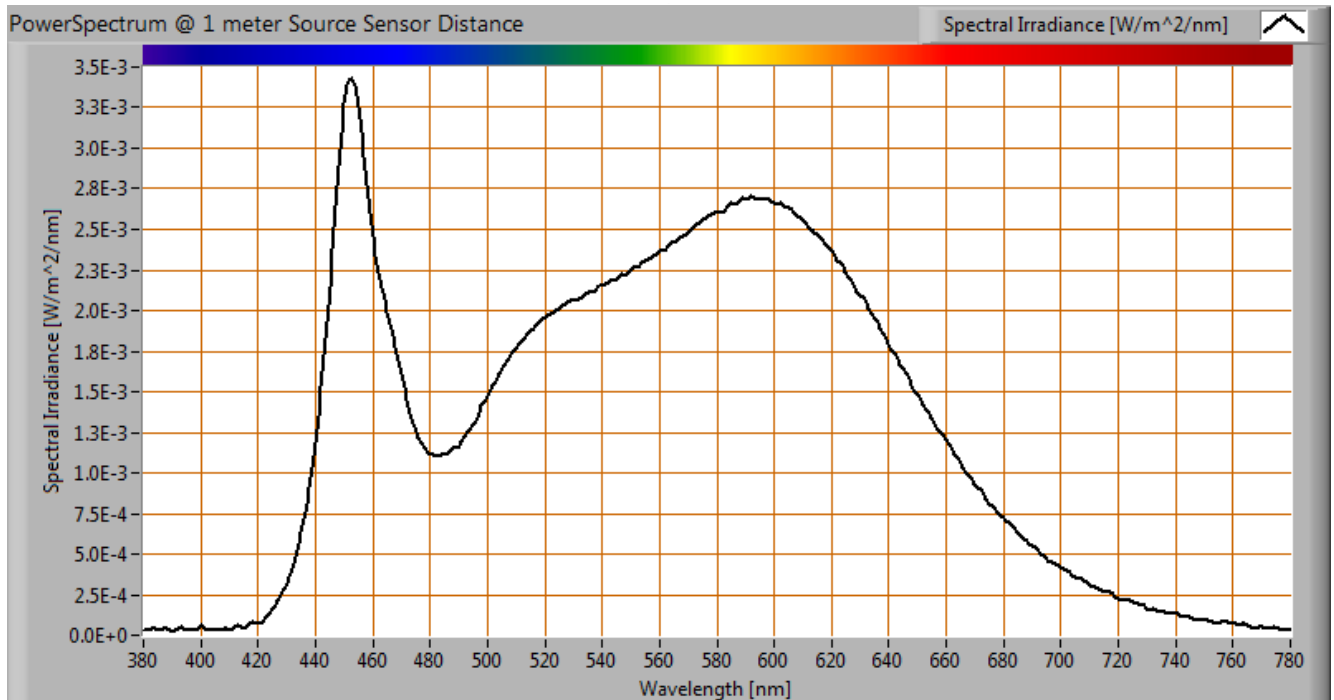

The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.


The measured color temperature is 4329 K which is neutral white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

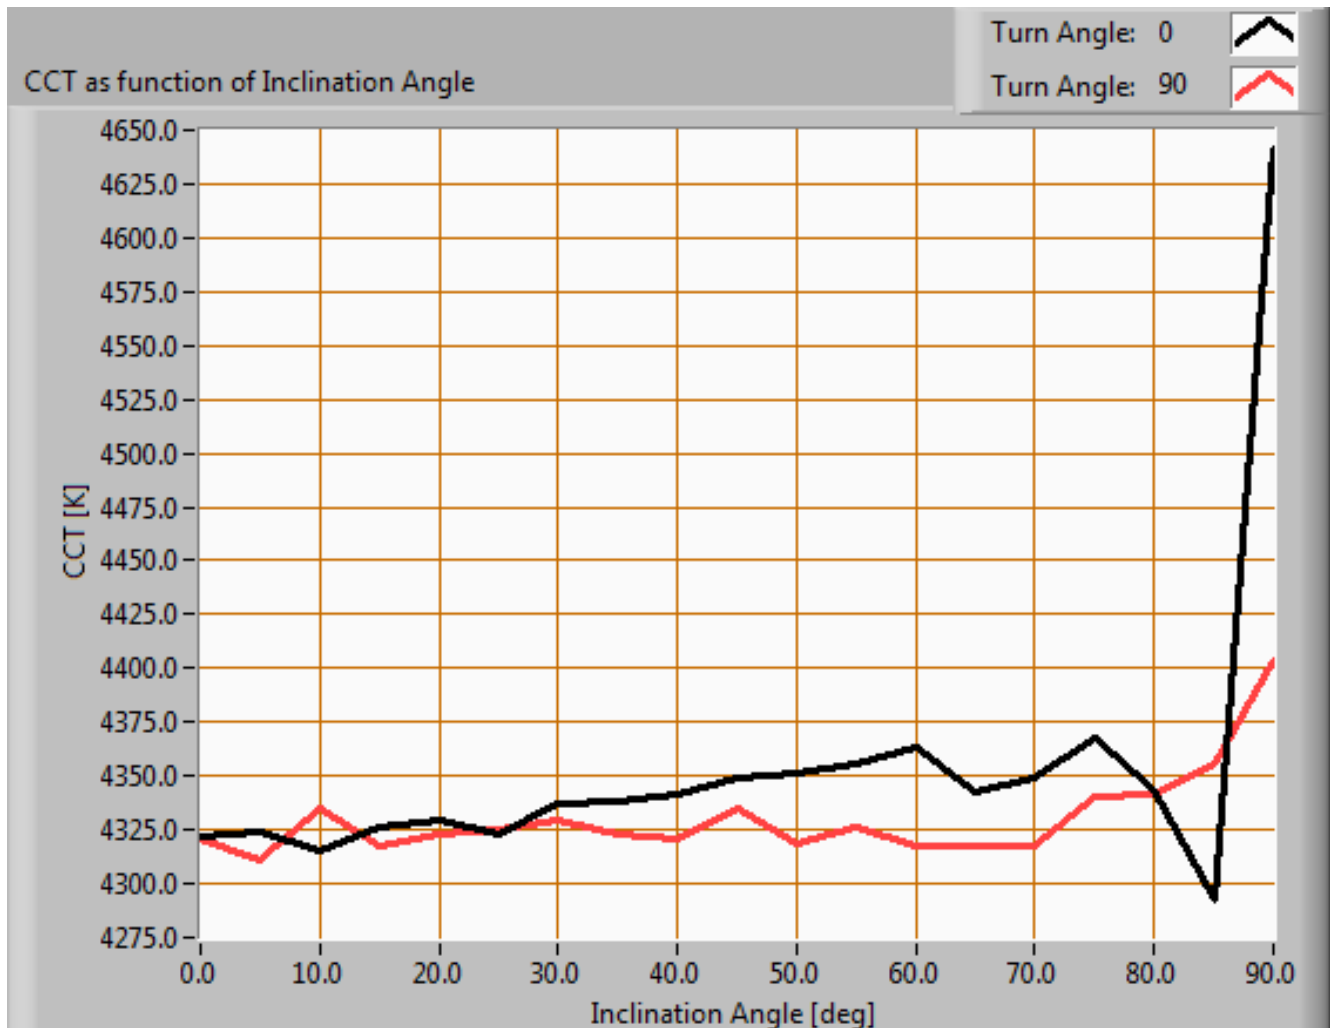

Color temperature as a function of inclination angle.

The color temperature is given for inclination angles up to 90 deg. Beyond that angle has not been measured.

For the C0-C180 plane: the beam angle of 110 deg is equivalent to 55.1 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in the first 90 degrees of this inclination area is about 0 %.

For the C90-C270 plane: the beam angle of 110 deg is equivalent to 55.1 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in the first 90 degrees of this inclination area is about 1 %.


TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined.

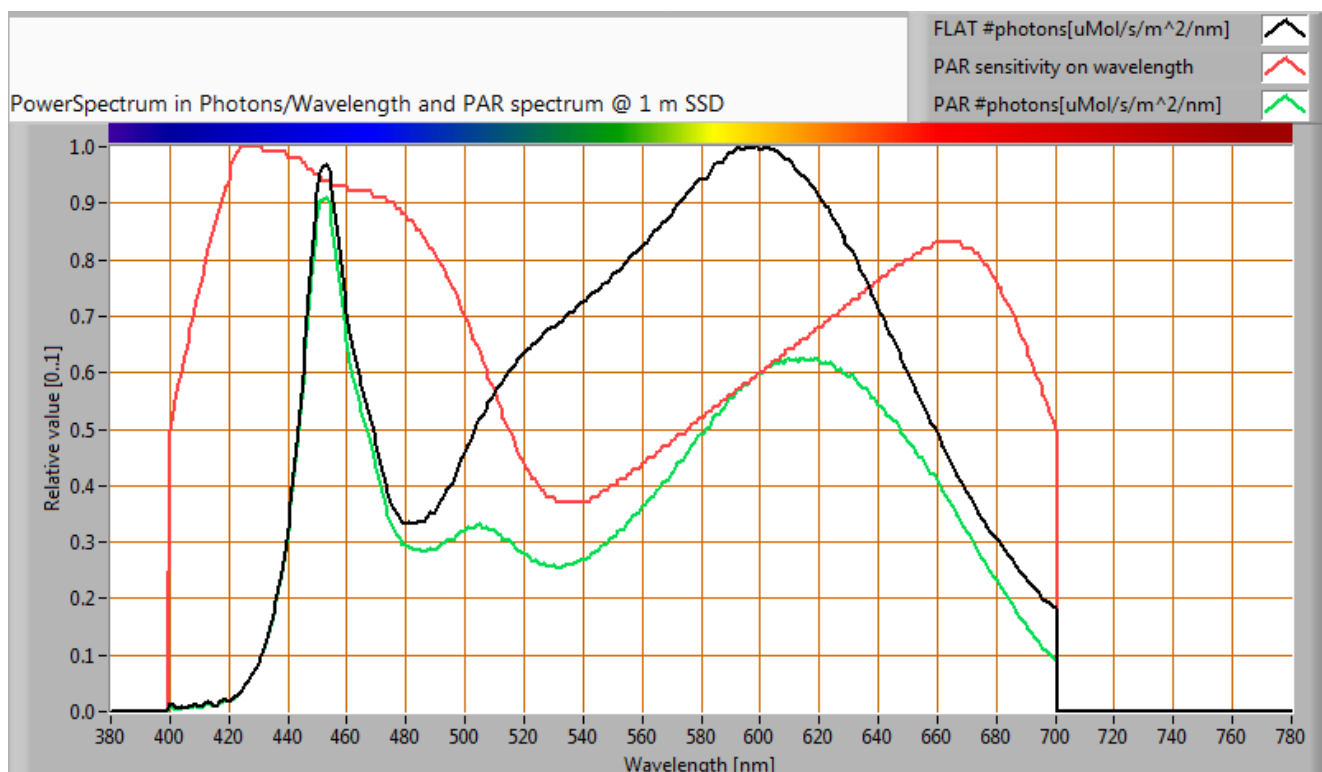

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb

parameter	value	unit
PAR number	1.5	uMol/s/m ²
PAR photon current	4.2	uMol/s
PAR photon efficacy	0.4	uMol/s/W


The PAR efficiency is 65 % (valid for the PAR wave length range of 400 - 700 nm). This is the maximum percentage of the total of photons in the light that is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

S/P ratio

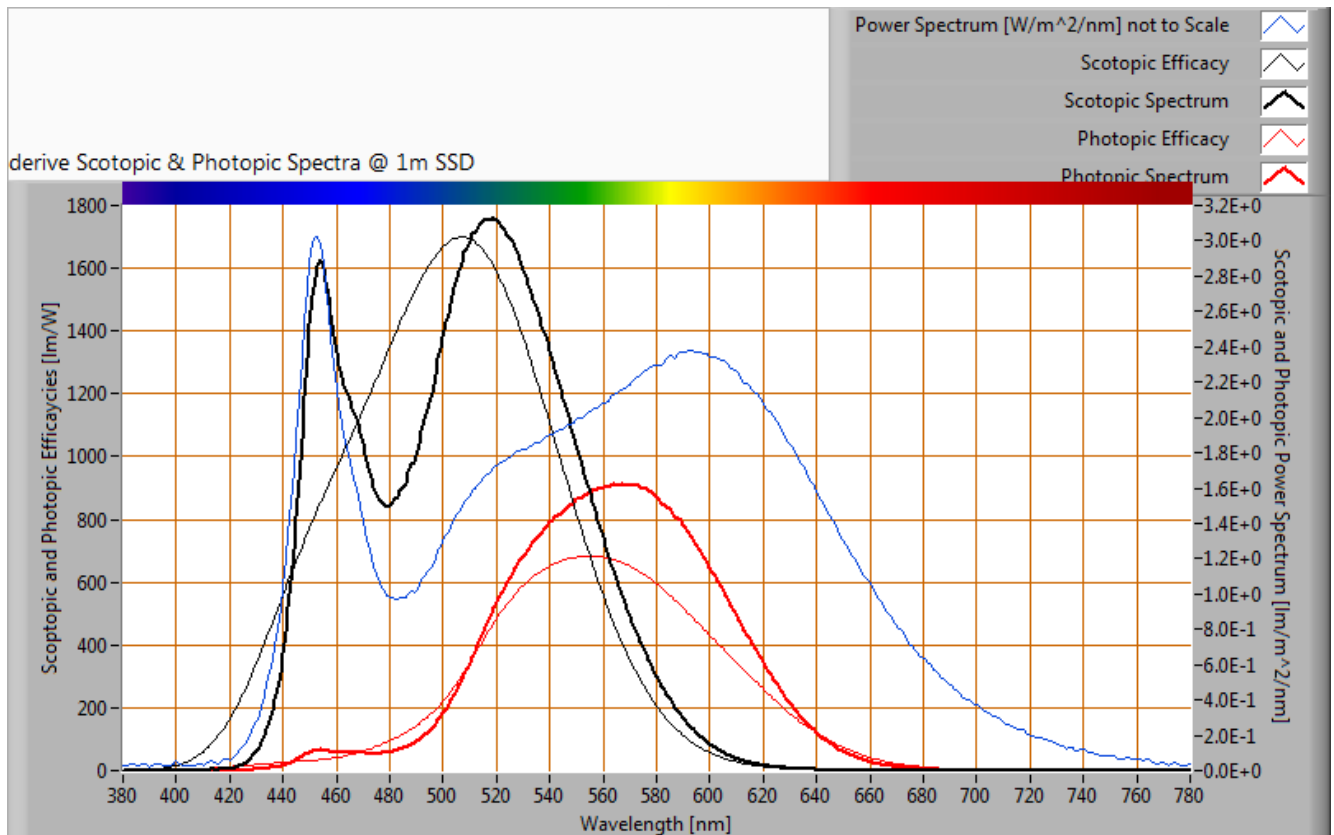

The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).


The S/P ratio of the light coming from this lamp is 1.8.

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Chromaticity diagram

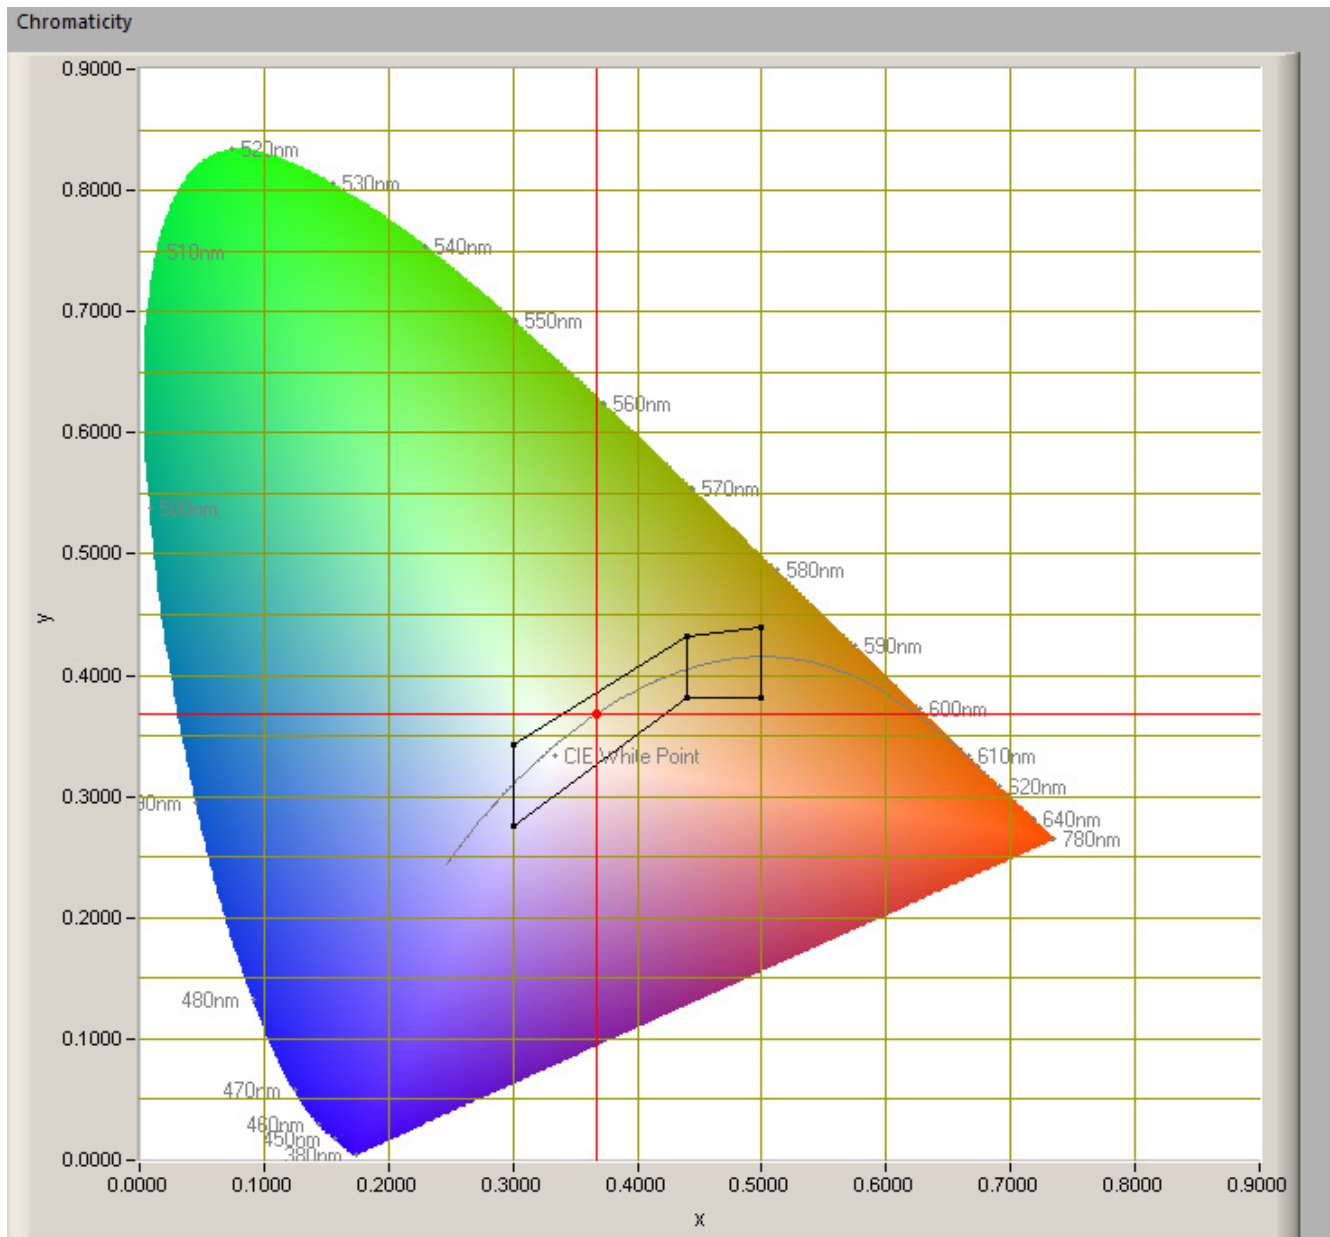

The chromaticity space and the position of the lamp's color coordinates in it.

The point of the light in this diagram is inside the area indicated with class A. This area indicates an area for signal lamps.

The color coordinates are $x=0.3683$ and $y=0.3671$.

TAGLUMO[®]


Lighting

Lamp measurement report - 26 April 2015

Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp)

Each color has an index R_x , and the first 8 indexes ($R_1 .. R_8$) are averaged to compute the R_a which is equivalent to the CRI.

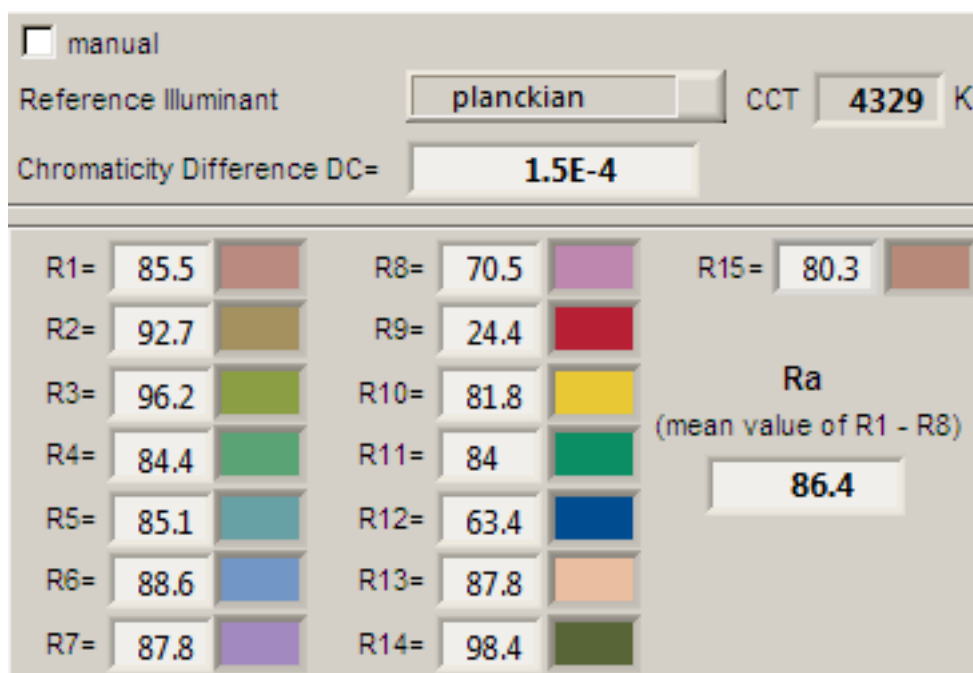

CRI of the light of this lightbulb.

This value of 86 indicates how well the light of this lamp can render well a set of reference colors, this in comparison with the light of a reference source (for color temperatures $< 5000K$ a black radiator is used as reference and for color temperatures $> 5000K$ the sun or the light outside during the day).

The value of 86 is bigger than the value of 80 that is considered as a minimum for working areas in general.

Note: the chromaticity difference is 0.0001 and indicates the distance to the Planckian Locus. There is a value mentioned of max $5.4E-3$ in section 5.3 of CIE 13.3-1995 however not further explanation of it.

An other reference with signal lights as a reference is given in the chromaticity diagram.


TAGLUMO[®]

Lighting


Lamp measurement report - 26 April 2015

Color Quality Scale

(v9.0.3) is an improved indicator (over CRI) of how well colors are rendered.

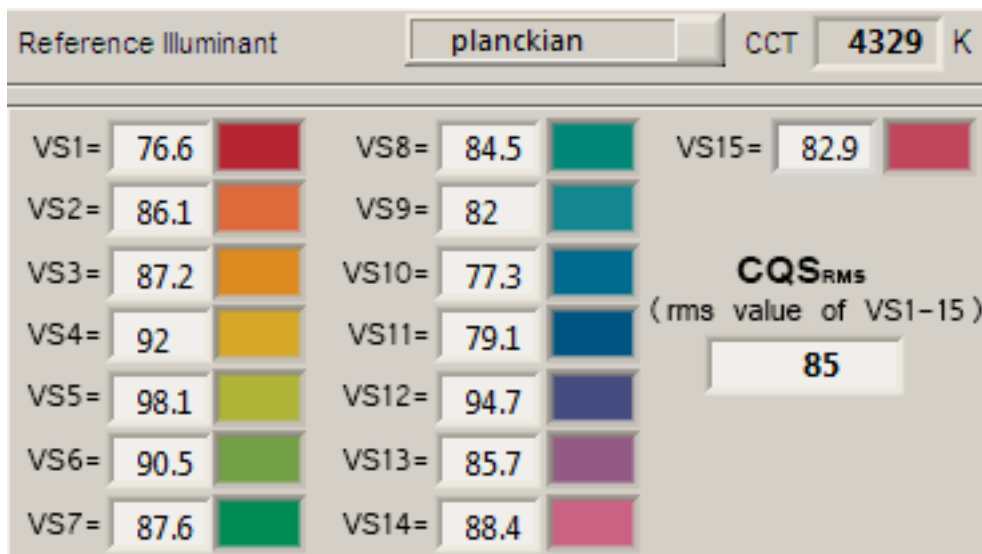

CQS-values of the light of this light bulb.

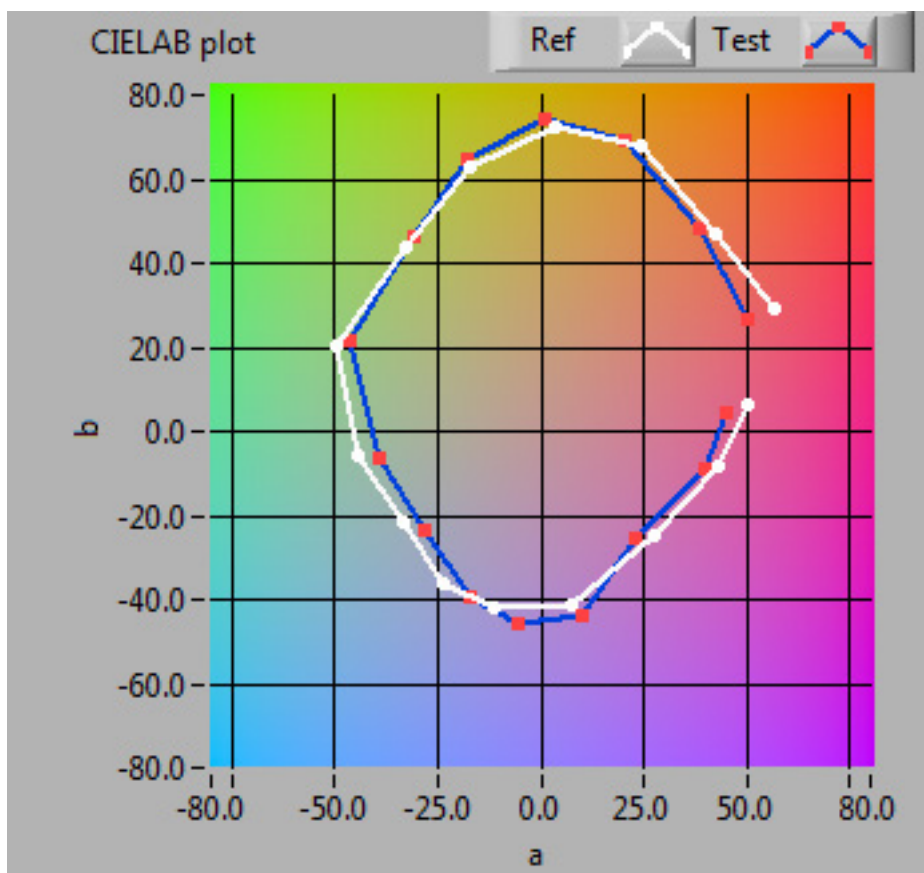

TAGLUMO[®]


Lighting

Lamp measurement report - 26 April 2015

CQS-values for the light of this light bulb compared with those of a reference source with the same color temperature.

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W] (this latter is estimated here by dividing the found E_v value by P).

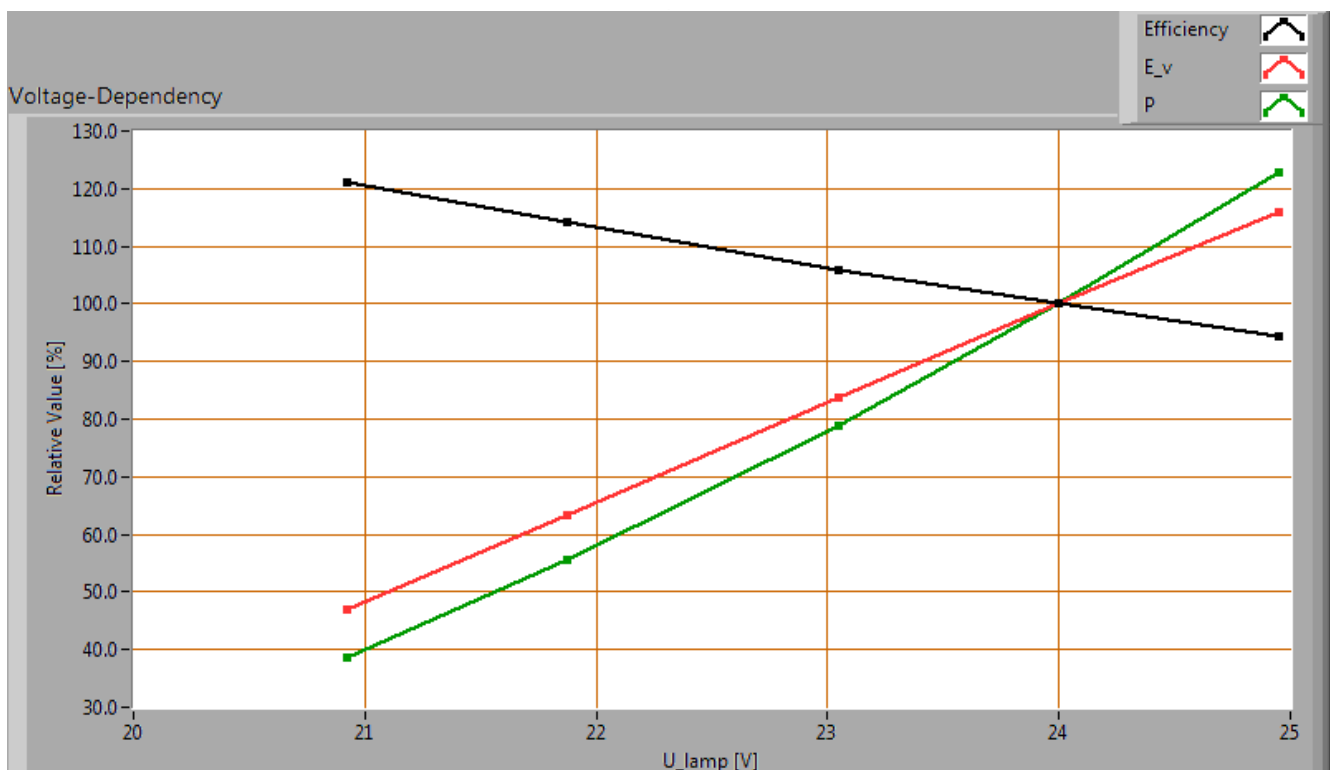

Lamp voltage dependencies of certain light bulb parameters

There is a constant dependency of the illuminance when the power voltage varies between 22 - 26 V DC.

There is a constant dependency of the consumed power when the power voltage varies between 22 - 26 V DC.

When the voltage varies abruptly with + or - 0.5 V DC then this results in a variation of the illuminance of maximally 8.6 %. This difference in illuminance is possibly visible (when it occurs abruptly).


TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Warm up effects


After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

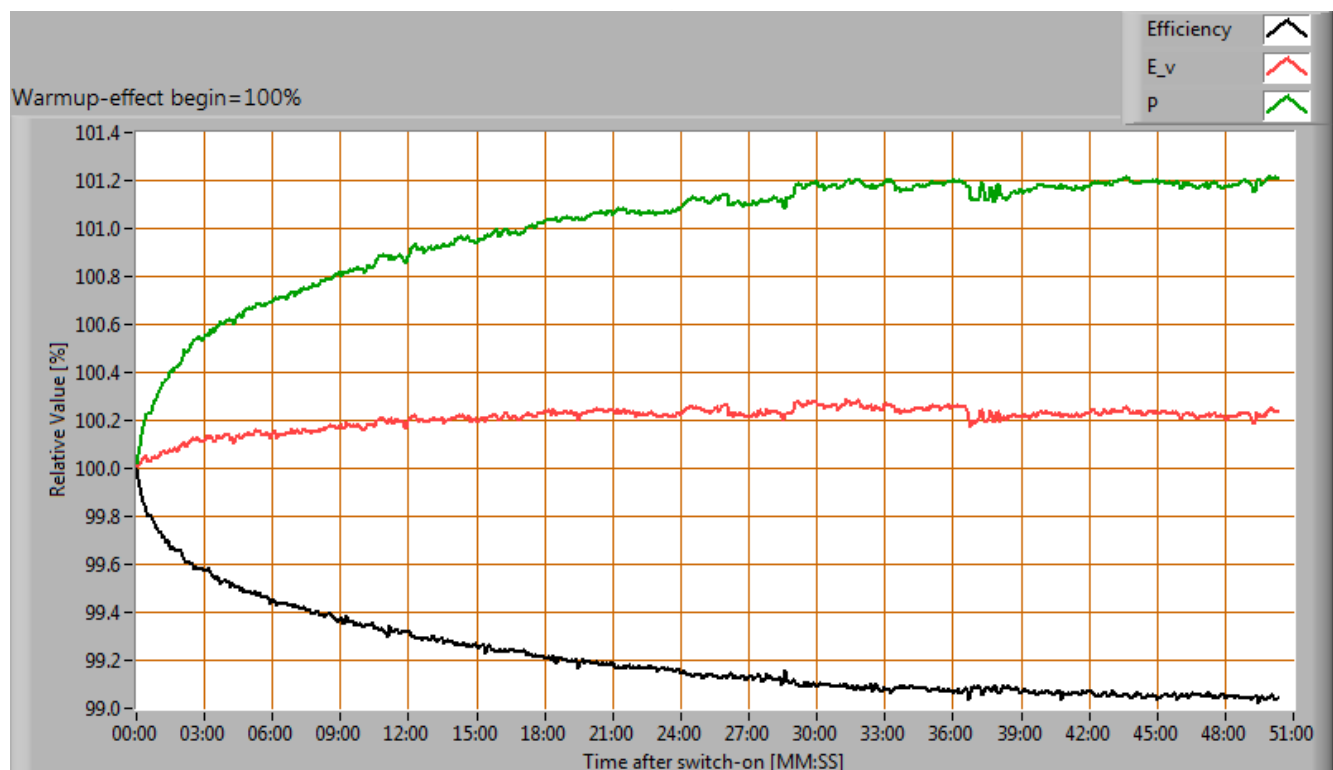

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

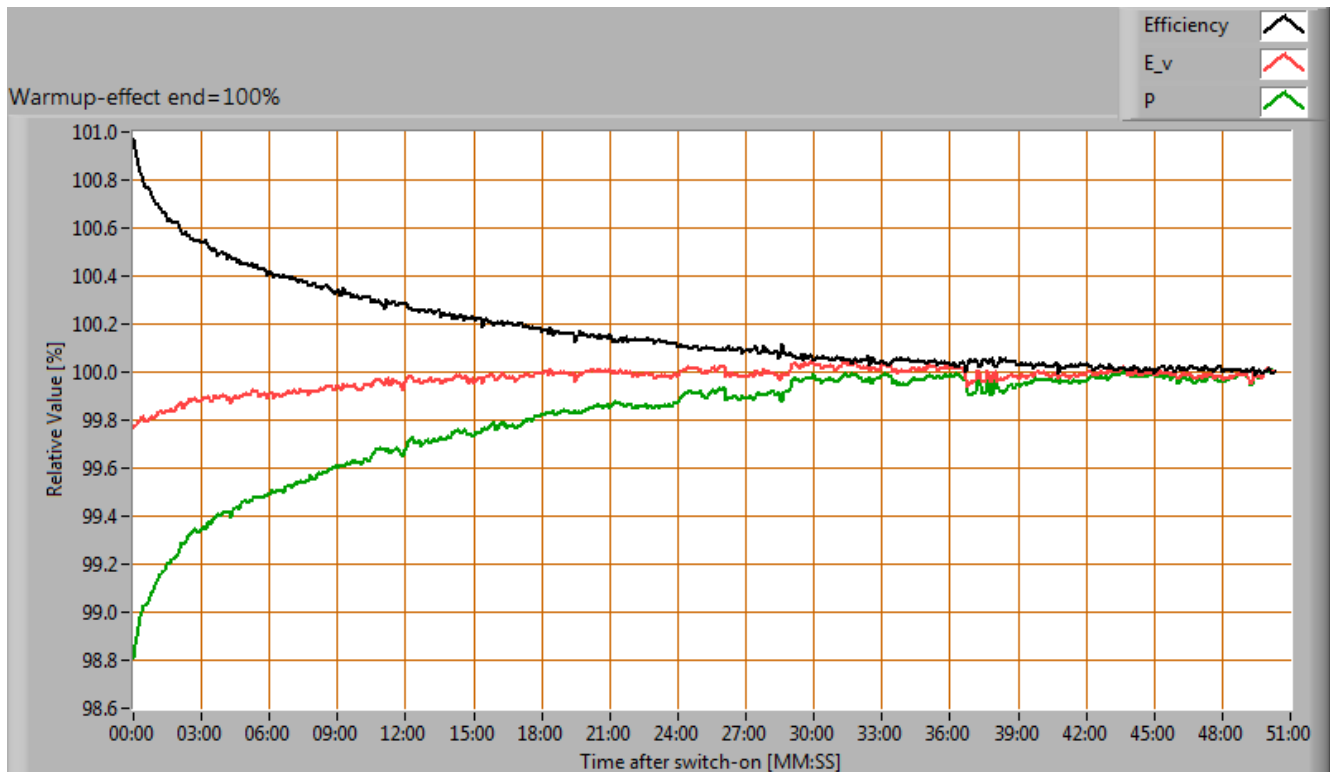

Effect of warming up on different light bulb parameters. In the first graph the 100 % level is put at begin, and in the last graph the 100 % level is put at the end.

During the warmup time the illuminance doesn't vary significantly (< 5 %).

During the warmup time the power doesn't vary significantly (< 5 %).
The variation in efficacy (calculated as indication by simply dividing the illuminance by the power) during the warming up is -1 %. A very high negative value indicates a significant decrease for instance due to heating up of the lamp (decrease of lifetime).


TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb.

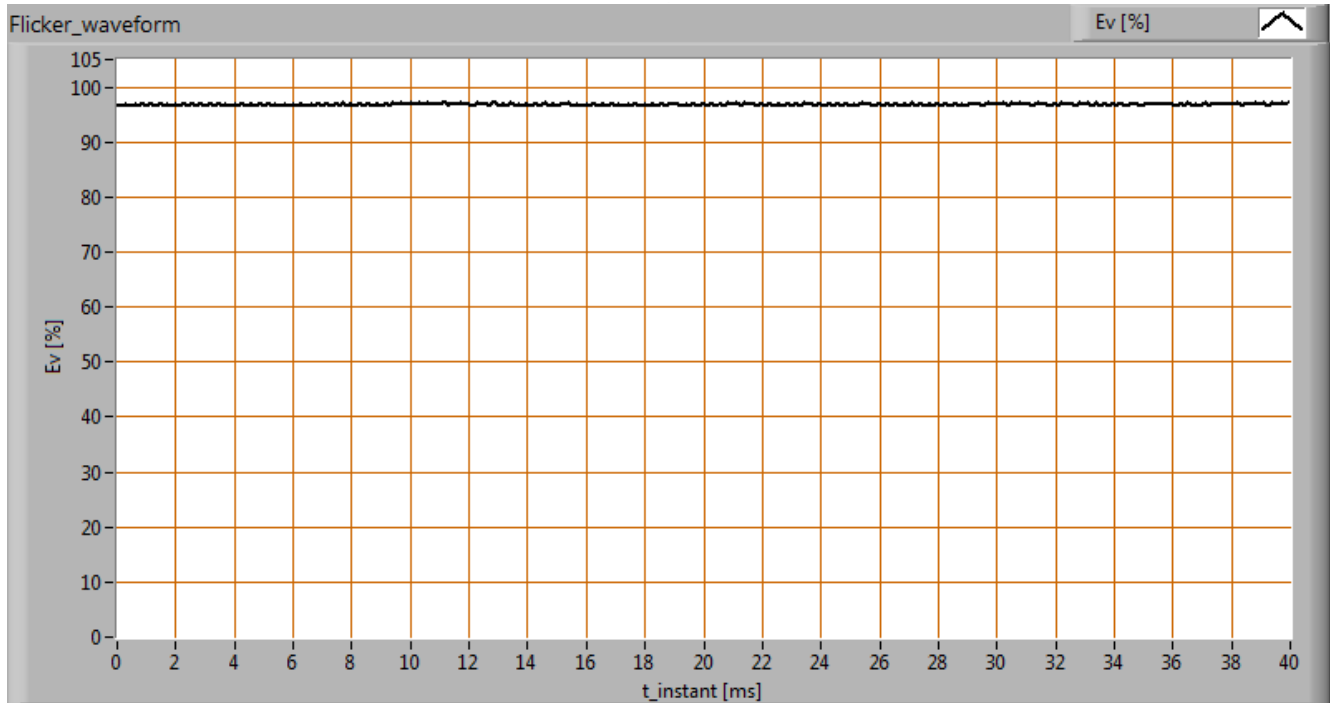

The measure of fast illuminance variation of the light of the light bulb

parameter	value	unit
Flicker frequency	3506.4	Hz
Illuminance modulation index	0	%

The illuminance modulation index is computed as: $(\max_Ev - \min_Ev) / (\max_Ev + \min_Ev)$.

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

Biologic effect

The biologic effect shows the level of impact the light of this lamp can have on the day-night rhythm of human beings (as well as the suppression of melatonin production).

The important parameters (according to prenorm DIN V 5031-100:2009-06):

biologic effect factor	0.607
k_biol trans (25 years)	1.000
k_biol trans (50 years)	0.756
k_biol trans (75 years)	0.490
k_pupil(25 years)	1.000
k_pupil(50 years)	0.740
k_pupil(75 years)	0.519


TAGLUMO®

Lighting

Lamp measurement report - 26 April 2015

Blue Light Hazard

The amount of blue light and the harm it can cause on the retina has been determined. Herewith the results.

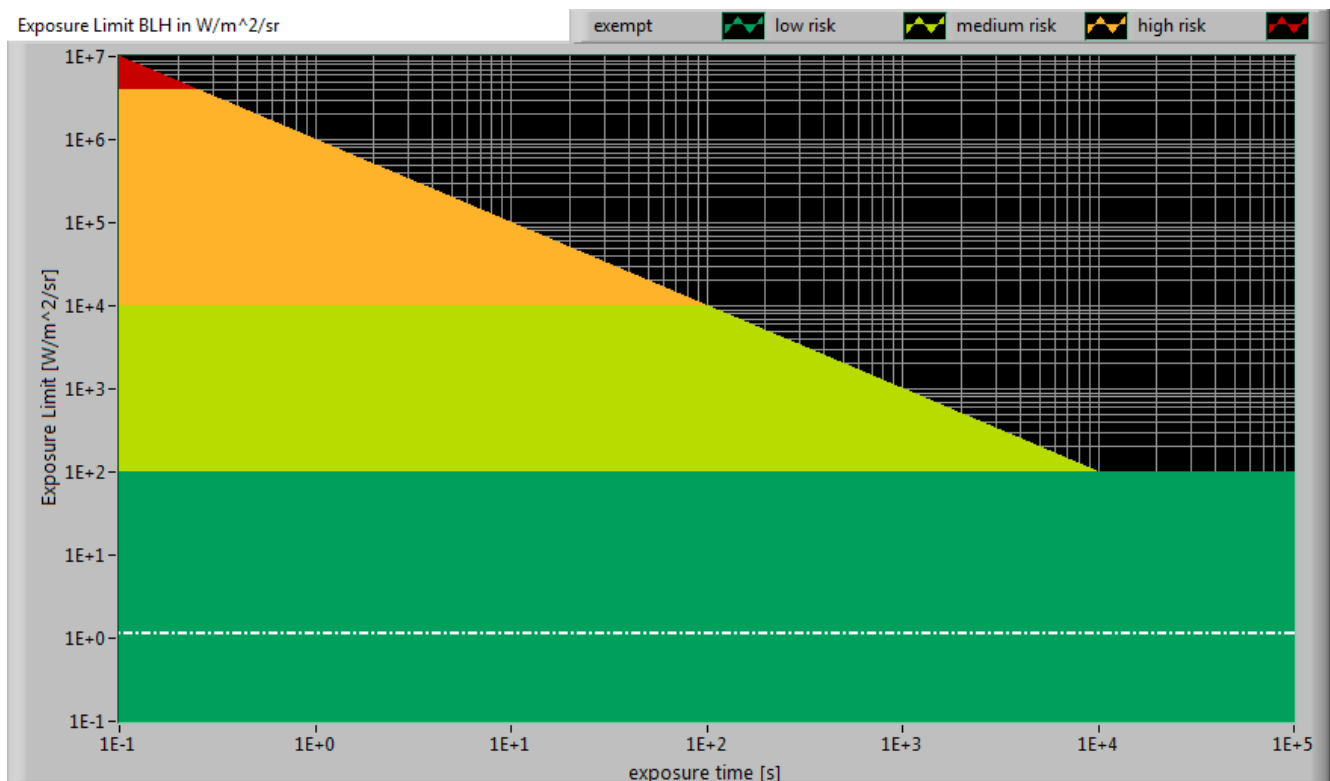

The level of blue light of this lamp related to the exposure limit and the different classification areas.

L_lum0 [mm]	272	Dimension of brightest part of lamp in C0-C180 direction.
L_lum90 [mm]	372	Dimension of brightest part of lamp in C90-C270 direction.
SSD_500lx [mm]	563	Calculated distance where $E_v = 500$ lux. This computation is valid when it is in the far field of the lamp. Note: if this value 200 mm then the distance of 200 mm is taken as proposed in the norm IEC 62471:2006.
Start of far field [mm]	2304	Minimum distance at which the lamp can be seen as a point source. In this area the E_v is linearly dependent from $(1/\text{distance})^2$.
300-350 nm values stuffed with 0s	yes	In the event OliNo has measured with a SpB1211 spectrometer without UV option then the irradiance data of 300-349 nm is missing. For lamps where there is already no energy content near 350 nm, the values 300-349 can also be set at zero then.

TAGLUMO[®]

Lighting

Lamp measurement report - 26 April 2015

alpha_C0-C180 [rad]	0.483	(Apparent) source angle in C0-C180 direction.
alpha_C90-C270 [rad]	0.661	(Apparent) source angle in C90-C270 direction.
alpha_AVG [rad]	0.100	Average (apparent) source angle. If average ≥ 0.011 rad then the exposure limit is computed with radiance L_b . Otherwise with irradiance E_b .
Exposure value [$W/m^2/sr$]	1.13E+0	Blue Light Hazard value for this lamp, measured straight underneath the lamp. Computation is referenced to L_b . Because the distance at 500 lux is in the near field, then this exposure value is too pessimistic and should be lower.
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.

Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

License

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly prohibited to change or alter parts of the report and/or republish it in a modified content.